

LHB16 Laurel

Glare Free Linear Highbay

Low glare and asymmetric optic available linear lighting fixtures to meet the needs of various applications

IP66 | IK08 | 1-10V | Low Glare | PIR Sensor | Microwave Sensor | DALI 2

KIRITO


Low UGR, Visual Comfortable


Most wattages and beam angles' LHB16 could reach UGR around 20



Multiple Light Distribution

LHB16's tailored optic lens with cup shaped reflector, delivers narrow and wide lighting distribution, covering warehouse, supermarket and other open indoor areas like parking garage which helps to reduce the light loss.

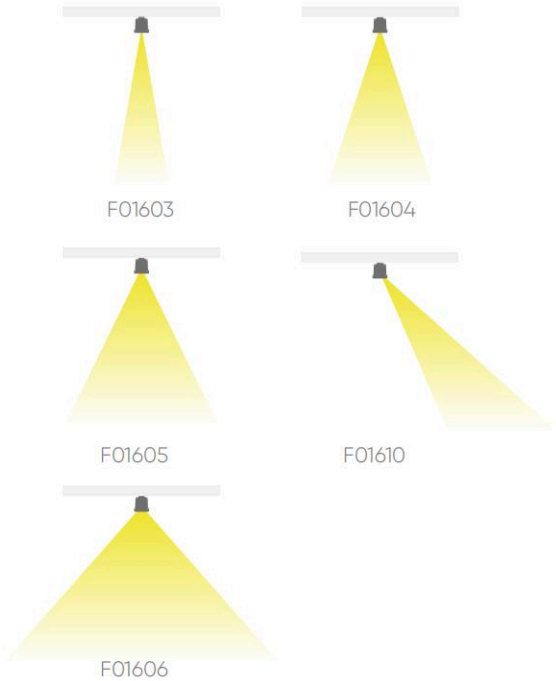


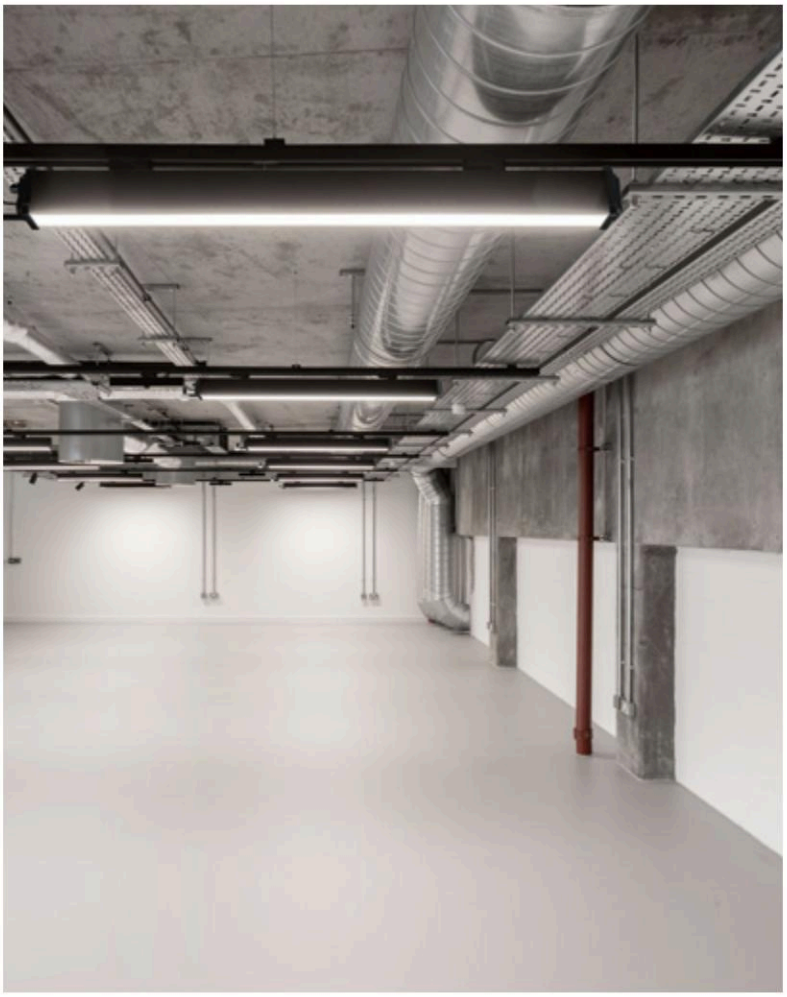

Overview

1. Special design for waterproof, IP66
2. 4mm thick tempered glass, approved IK08 anti-attack test for indoor sports court as well
3. Private design cup-shaped reflectors inside LHB16 tobettet control UGR<20
4. Multiple mounting options
5. Motion sensor options
6. Respirator



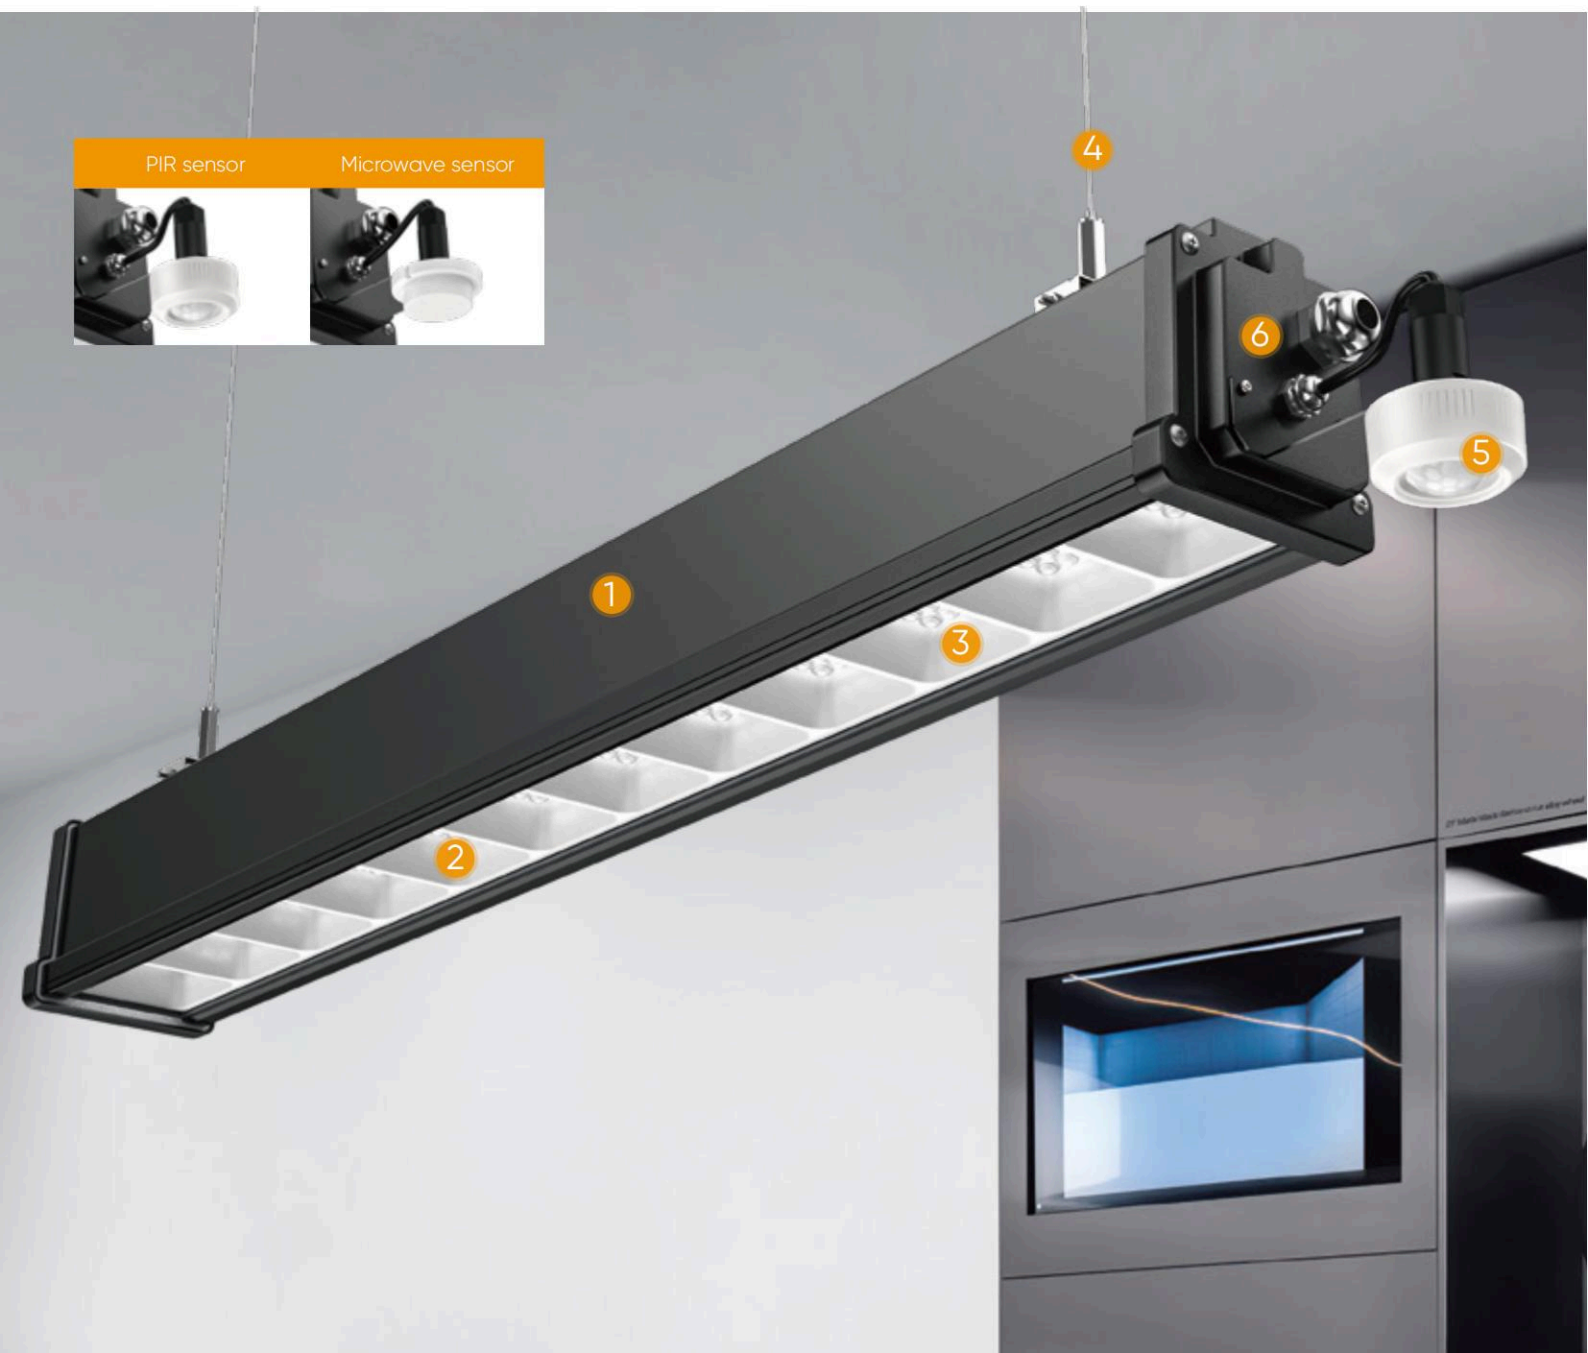






ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	LHB16
Power	50W, 100W, 150W, 200W
Efficacy	140lm/W
Input Voltage	100-240 VAC, 50 / 60 Hz
Power Factor	>0.92
UGR Level	20
CCT	3000K, 4000K, 5000K
CRI(Ra)	80
Control	Dimmable, Microwave Sensor, PIR Sensor, Non-Dimmable
IP Rating	IP65
IK Rating	IK08
Mounting Option	Wire Suspension, Surface
Warranty	5 Years
Surge Protection	4kV line-line, 6kV line-earth, 5kV line-line, 10kV line-earth
Operating Temperature	-30°C to + 50°C(with sensor :0°C to + 50°C□

Laurel looks simple and elegant. Its housing is made of a combination of high thermal conductivity aluminum extruded radiator and die-cast aluminum end cover that feels somehow metallic. Module lens, universal and interchangeable. It can realize the interchangeability of light distribution from different angles and meet the needs of various applications. Low UGR with soft vision environment Four sizes High efficacy Various intelligent controls Multiple mounting options

PRODUCT VIEWS

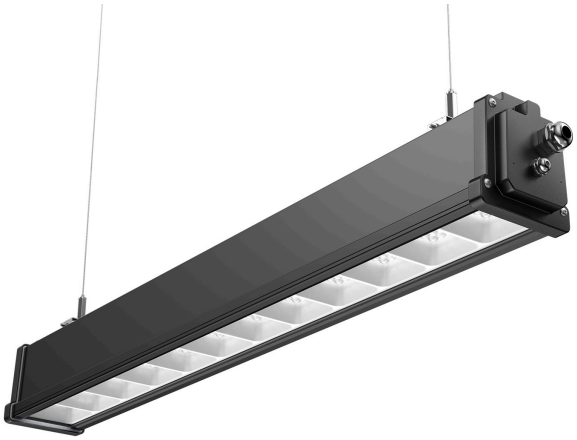

VIEW 1



VIEW 2



VIEW 3



VIEW 4