KIRITO



FL84 FlairLite

Ultra-Value LED Flood Light



Removable tempered glass for easy maintenance and two popular lenses are optional.

50-300W

Up to 155lm/W

IP66

IK08



Key Advantages

Reliable Design

5 sizes cover 50W to 300W.






Field-Adjustable Wattage

Housing integrates DIP switch for easy wattage adjustment and fewer SKUs.



Longer Service Life

Equipped with a vent diaphragm valve to avoid condensation, improving flood light performance and enhancing its lifetime.

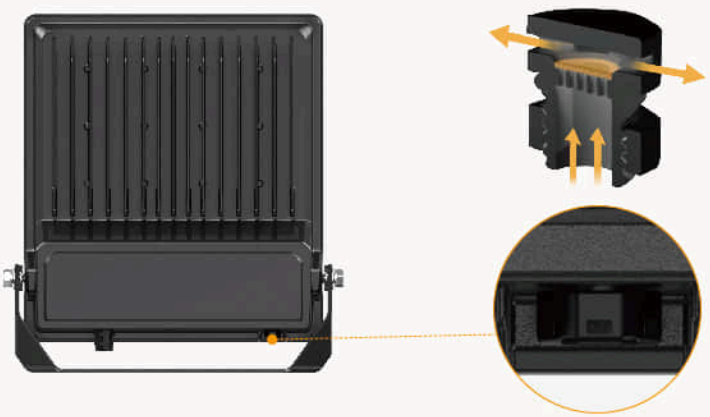

Great Benefits

Ultra-Value and Flexible

Higher profits than entry-level floodlights, and more flexibility than other floodlights.



Other floodlights

VS

US$50	150W	US$28	Costdown 44%
US$60	200W	US$36	Costdown 40%



KIRITO FL84

Double Protection

The lenses are protected by tempered glass to prevent yellowing and maintain optimal lighting performance.



F00823
Asymmetrical



F00826
Symmetrical

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	FL84
Power	50W, 100W, 150W, 200W, 240W, 300W
Efficacy	155lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
Corrosion Class	C3
IP Rating	IP66
IK Rating	IK08
Mounting Option	Pole Mounting, Bracket Mounting
Warranty	5 Years
Operating Temperature	-30°C to + 50°C

FlairLite is a light and flexible LED floodlight with a power range from 30W to 300W. It features field-adjustable wattage via integrated housing dial switches to save SKUs. Optics options include symmetric and asymmetric distributions to accommodate varied application requirements. A removable tempered glass cover protects the lenses from yellowing and simplifies maintenance access. The fixture incorporates a vent diaphragm valve to mitigate condensation and extend its lifetime. IP66 and IK08 protection ensures reliable performance in outdoor environments.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4