KIRITO



FL56 ReLux

RGBW Linear Wall Washer Light
Specialized for Architectural & Facade Lighting

18W/36W

100 lm/W

IP66


IK08

FL56 Wall Washer Lighting Fixture

FL56 is equipped with diecasting aluminium housing with outdoor powder coating finish and toughened glass diffuser.



Aluminum housing





Toughened glass




Wall washing basically washes the exterior with light, creating an intriguing luminosity that will make your building stand out in the nighttime.

Two sizes

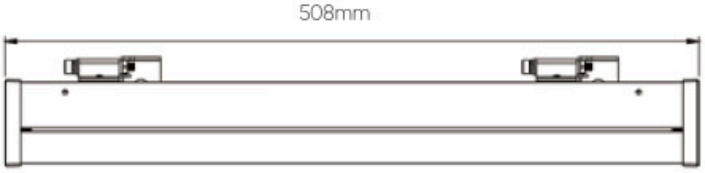



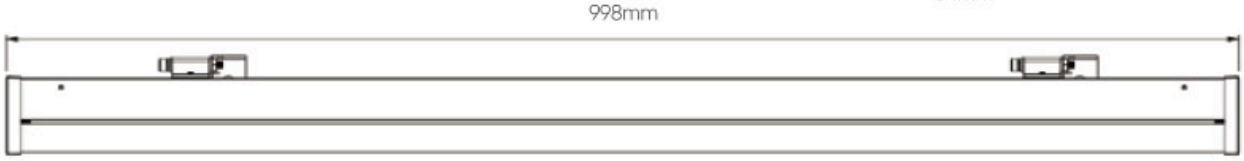


What colors can we achieve?

Available for White/Warm White, RGB and RGBW Color
Used a 4-in-one LEDs, mixing red green
blue and white LEDs.

RGB RGBW



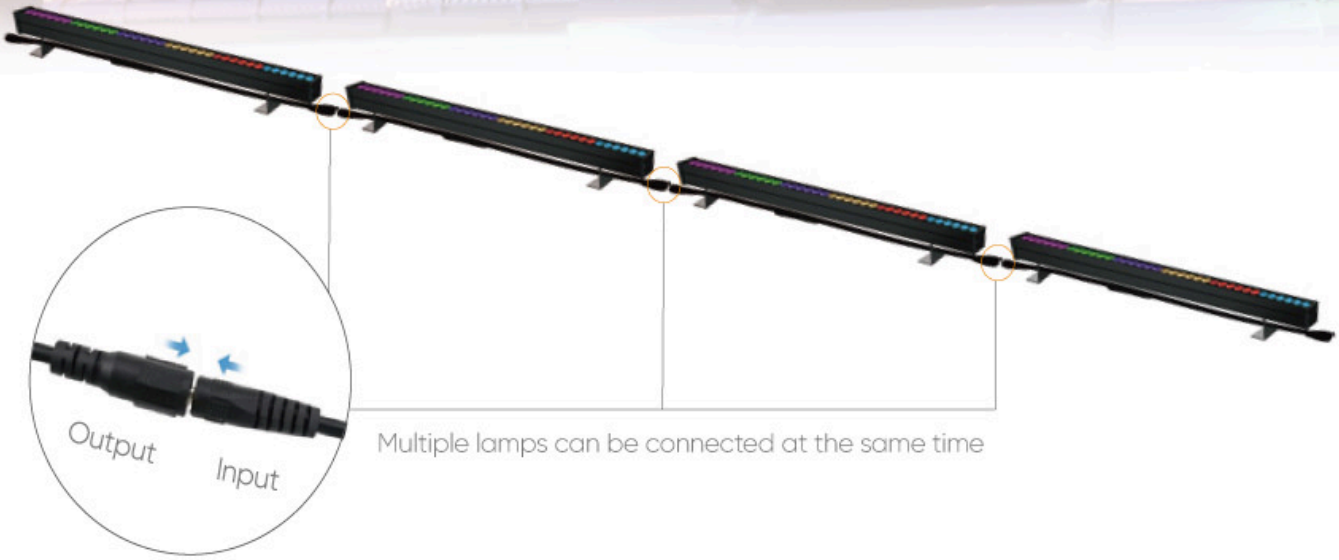

Smart DMX control with plug-and-play faster connector to get brilliant colors for projects








Multiple Optics Create Outstanding Lighting Effects

Adopting high transmittance PMMA lens and high hardness transparent glass.




Single white

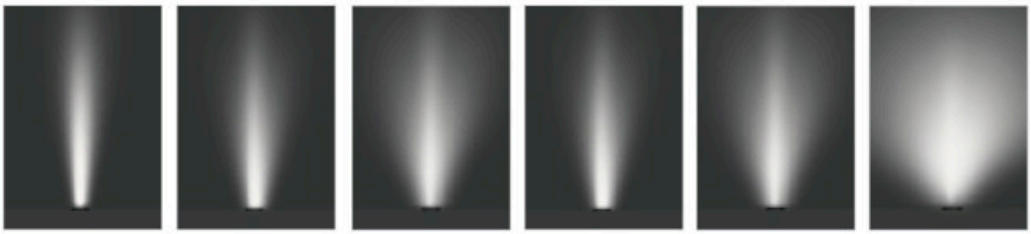

12° 30° 60° 15x30° 20x60° 75°

RGB and RGBW

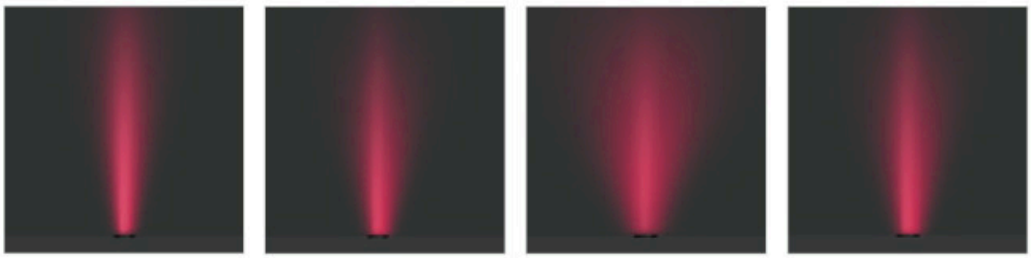

15° 25° 60° 15x30°

Anti-glare accessory




Honeycomb



Visor

Various Mounting Solutions

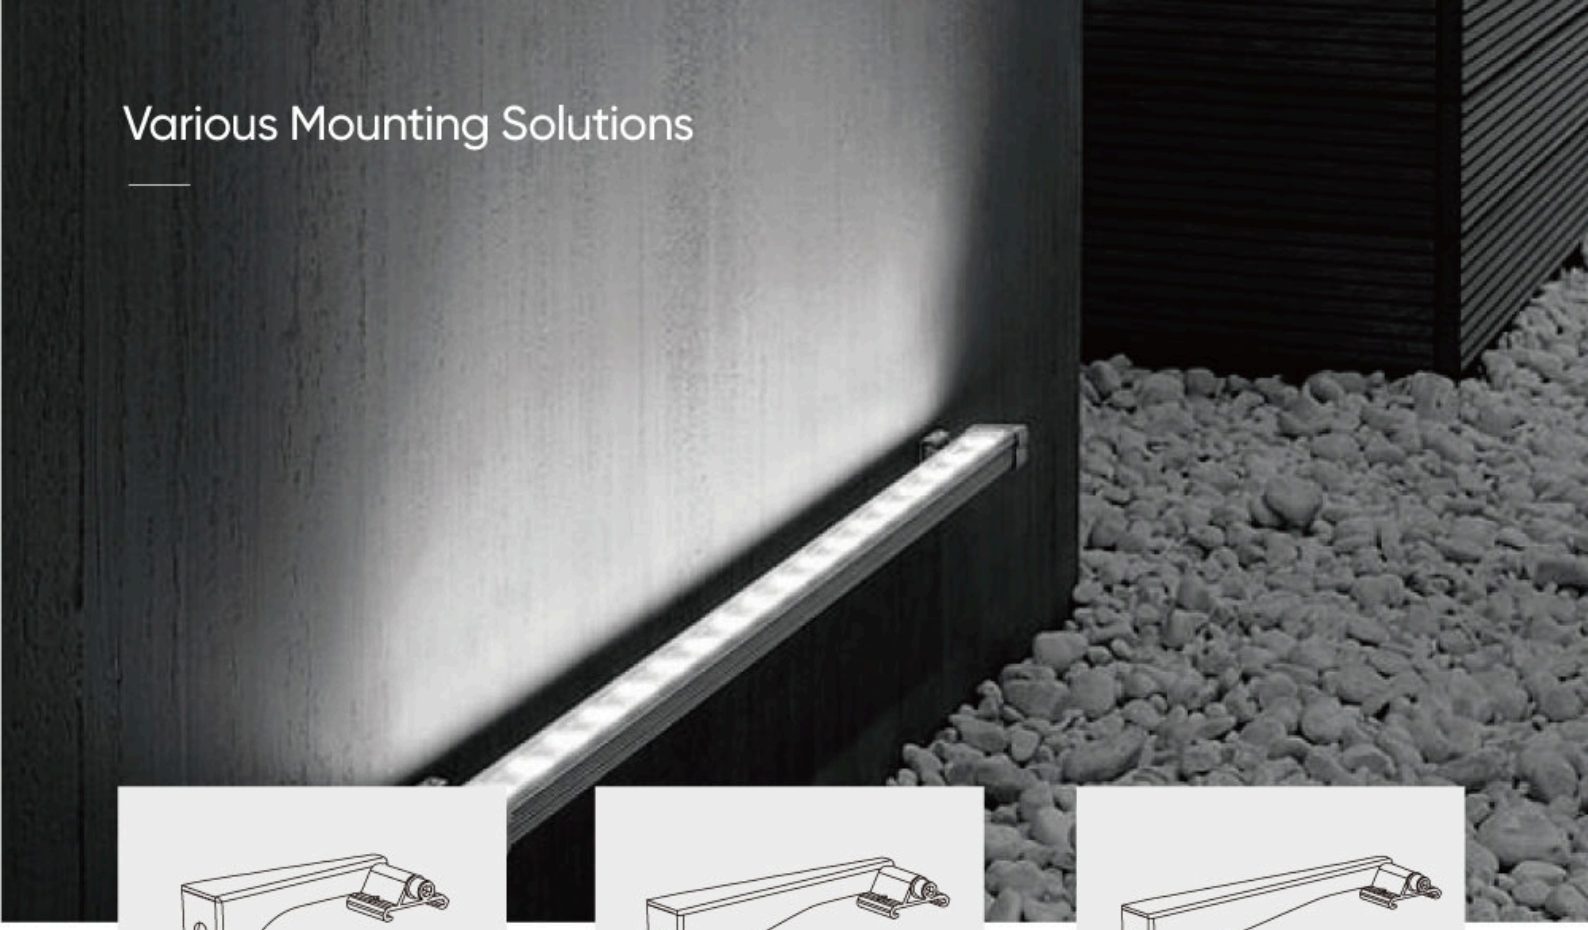

L bracket for FL56(L=100mm)

Code: BC-F56-03

L bracket for FL56(L=140mm)

Code: BC-F56-04

L bracket for FL56(L=180mm)

Code: BC-F56-05



Ceiling mount bracket for FL56(H=60mm)

Code: BC-F56-06




Ceiling mount bracket for FL56(H=120mm)

Code: BC-F56-07




Ceiling mount bracket for FL56(H=180mm)

Code: BC-F56-08

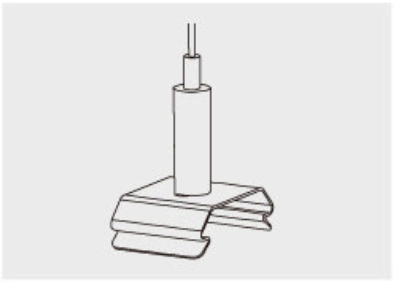

Suspension kit for FL56

Code: BC-F56-10

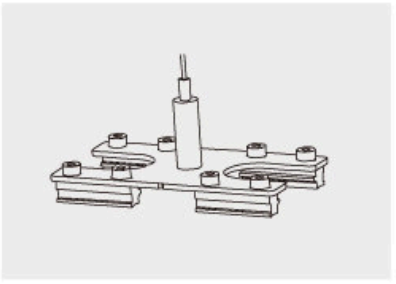

Suspension kit for FL56

Code: BC-F56-11

ADDITIONAL PRODUCT SPECIFICATIONS


Series Code	FL56
Power	18W, 36W
Efficacy	90lm/W, 100lm/W
Input Voltage	100-240 VAC, 24 Vdc, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K, RGB, RGBW
CRI(Ra)	70, 80, 90
Control	DALI, DMX
IP Rating	IP66
IK Rating	IK08
Mounting Option	Ceiling Mounting, Bracket Mounting, Wire Suspension
Warranty	5 Years
Surge Protection	2kV line-line, 2kV line-earth
Operating Temperature	-30°C to + 50°C

FL56 is an LED wall washer for landscape lighting. FL56 supply kinds of optic options, from narrow beams to wide beams. Three kinds light emitting modes, single white, RGB and RGBW by DMX control, which can satisfy different applications. Multiple installation ways and accessories make it a perfect lighting design for facades. Utilizing high transmittance PMMA lens and different beam angles for choice. Color options: single white, RGB, RGBW. Smart control: DMX control. Multiple installation methods optional. Anti-glare accessories are available (Visor, honeycomb, grid). Excellent heat dissipation for a longer service life. Applications: Facades appearance, Square, Plaza, Business street, Park, Advertising board, Bridge.


PRODUCT VIEWS



VIEW 1

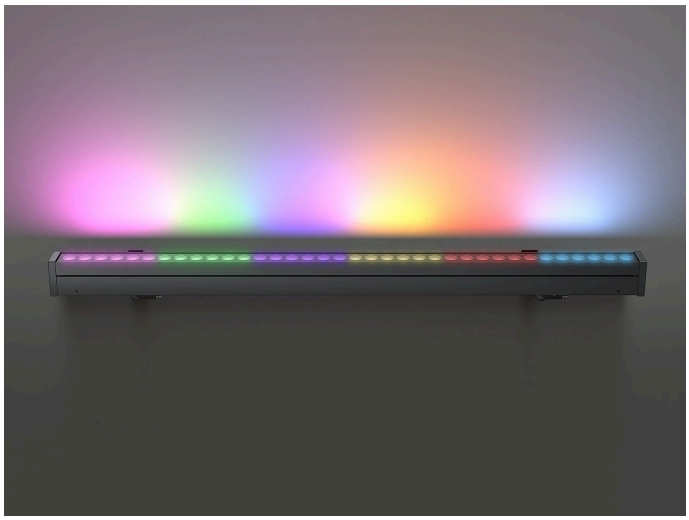

VIEW 2

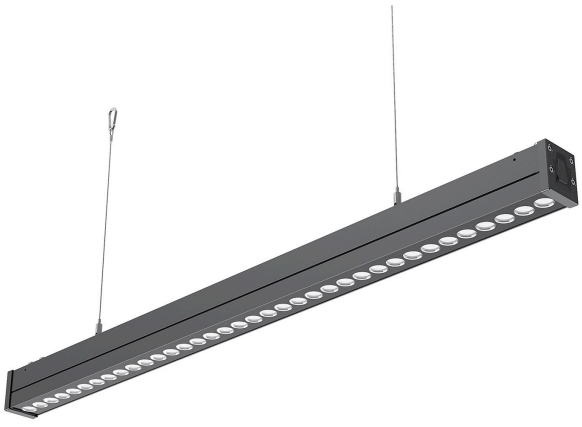

VIEW 3



VIEW 4