

ST10 HiSmooth-X

LED Street Light

Unique and patent design

IP66

IK08

3G Vibration

500hrs salty spray test

10kv surge protection

KIRITO

30-300w with 4200-42000lm lumen package, 300w equals 1000w MH light



30W/50W/70W



90W/120W/150W



180W/240W/300W

300W

1000W

METAL HALIDE LUMINAIRES





30-300w

Class I


30-150w

Class II






Intelligent control: 3pin 5pin 7pin NEMA Socket ;
Photocell available; Shorting cap available

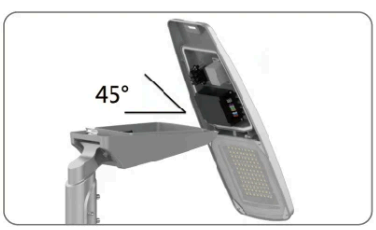

Tooless maintenance



Bubble level:
Accurate the installation in one minut

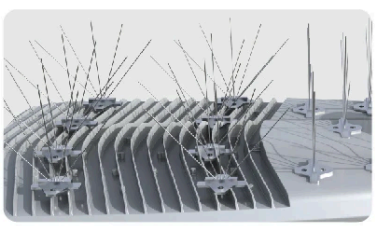

Bird spike



With tempered glass cover,
PC lens will not be yellowing

Vent to avoid moisture inside,
reliable for long term use

34mm/42mm/60mm/76mm spigot optional



Ø30~42mm


Ø60mm

Ø76mm

Unique optical design


Type I to Type V optional, special batswing lens is suitable for longer pole distance to save more installation and pole cost

Size A: 30W /50W /70W

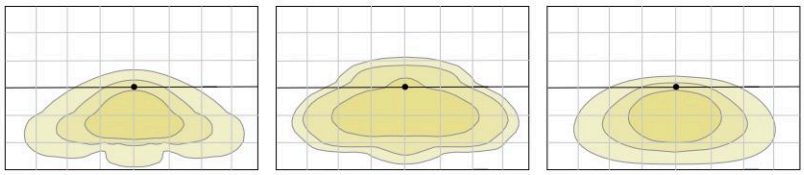


R09601 R09602 R09603

Size B: 90W /120W /150W

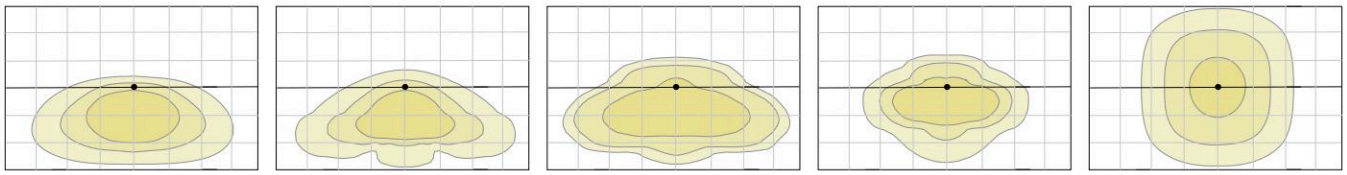


R17601 R17602 R17603 R17604 R17605


Size C: 180W /240W /300W

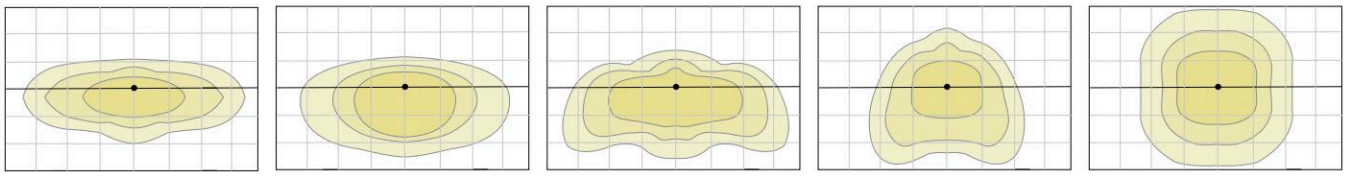

R01601 R01602 R01603 R01604 R01605

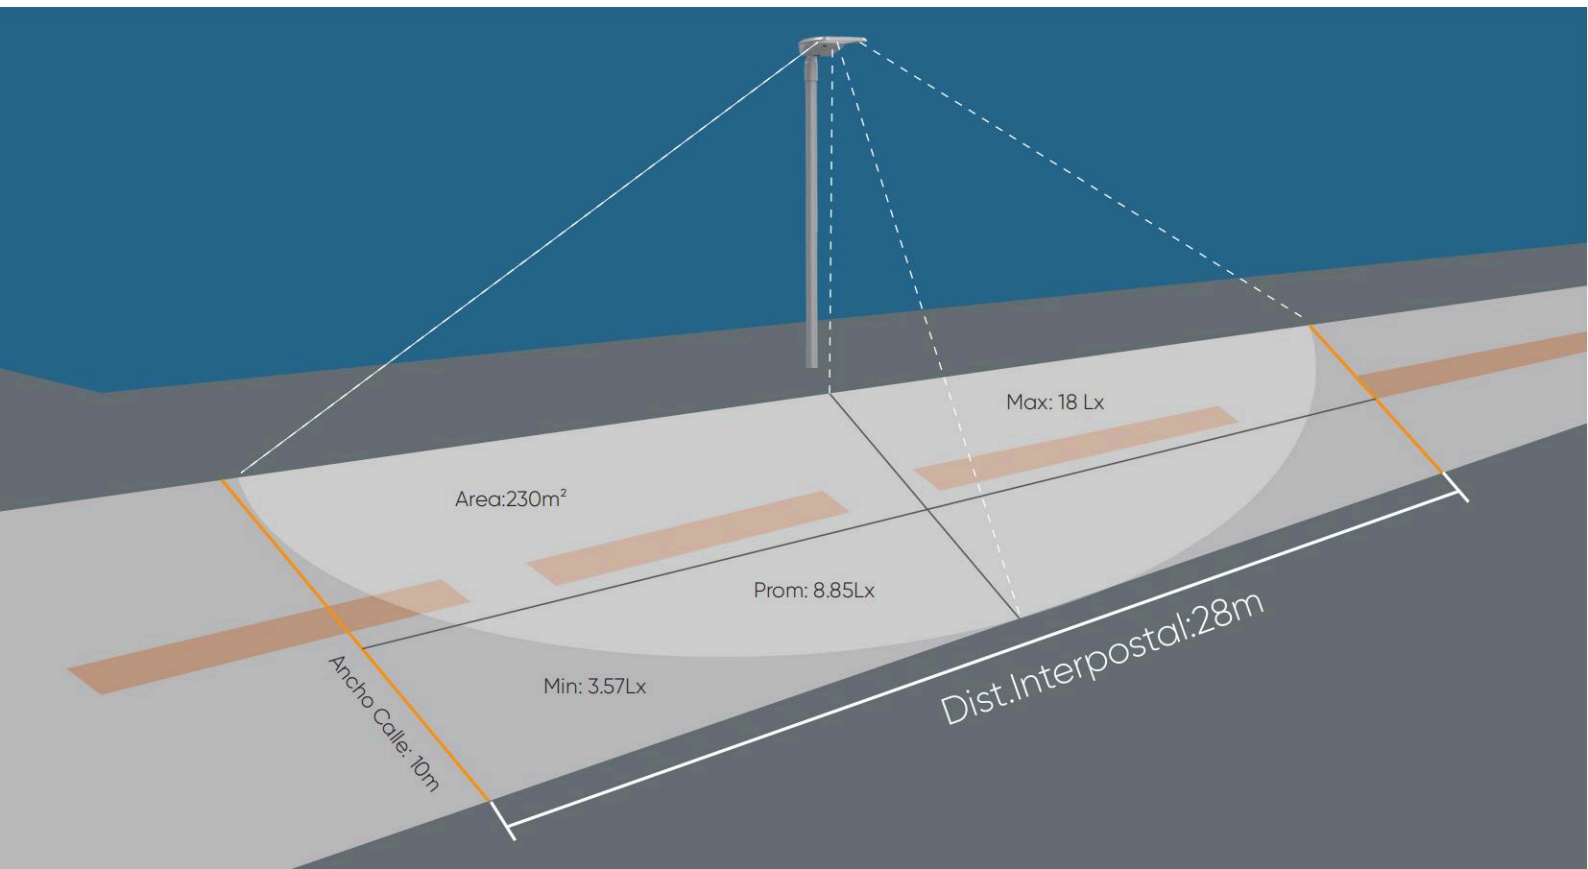




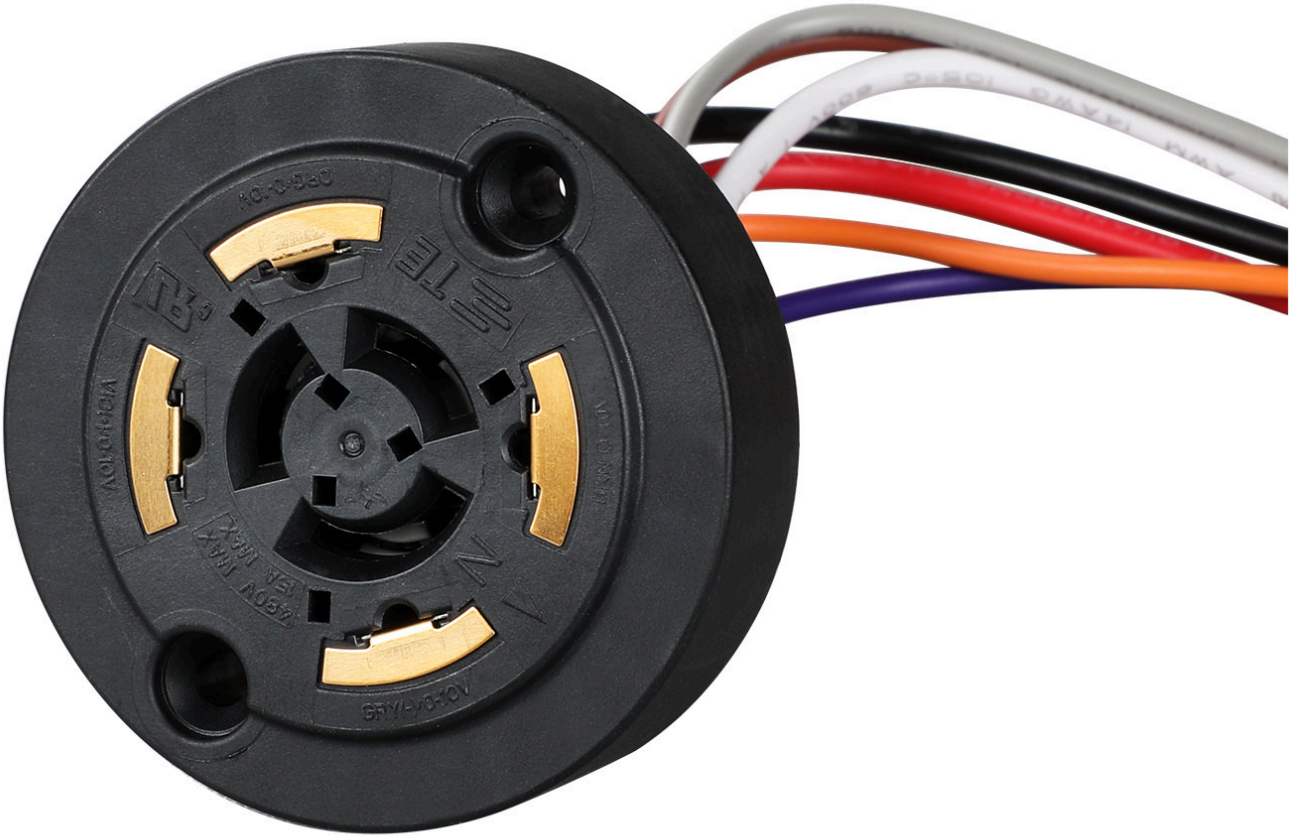



REMOVE
ENLEVER
NORTH
NORD
JL-205C
PHOTOCONTROL
CELLULE PHOTOÉLECTRIQUE
INSTALL
INSTALLER



INSTALL
INSTALLER



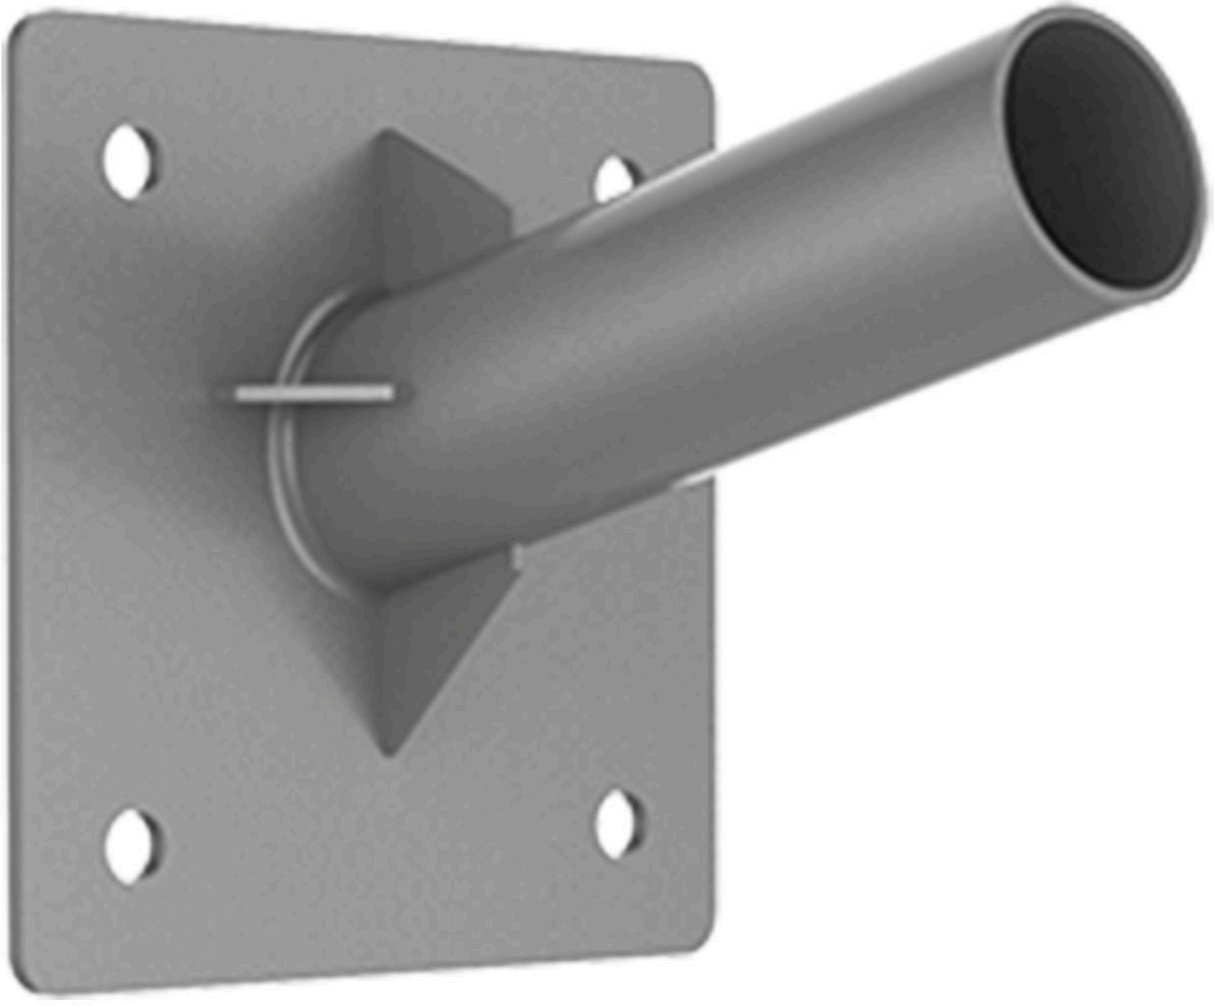

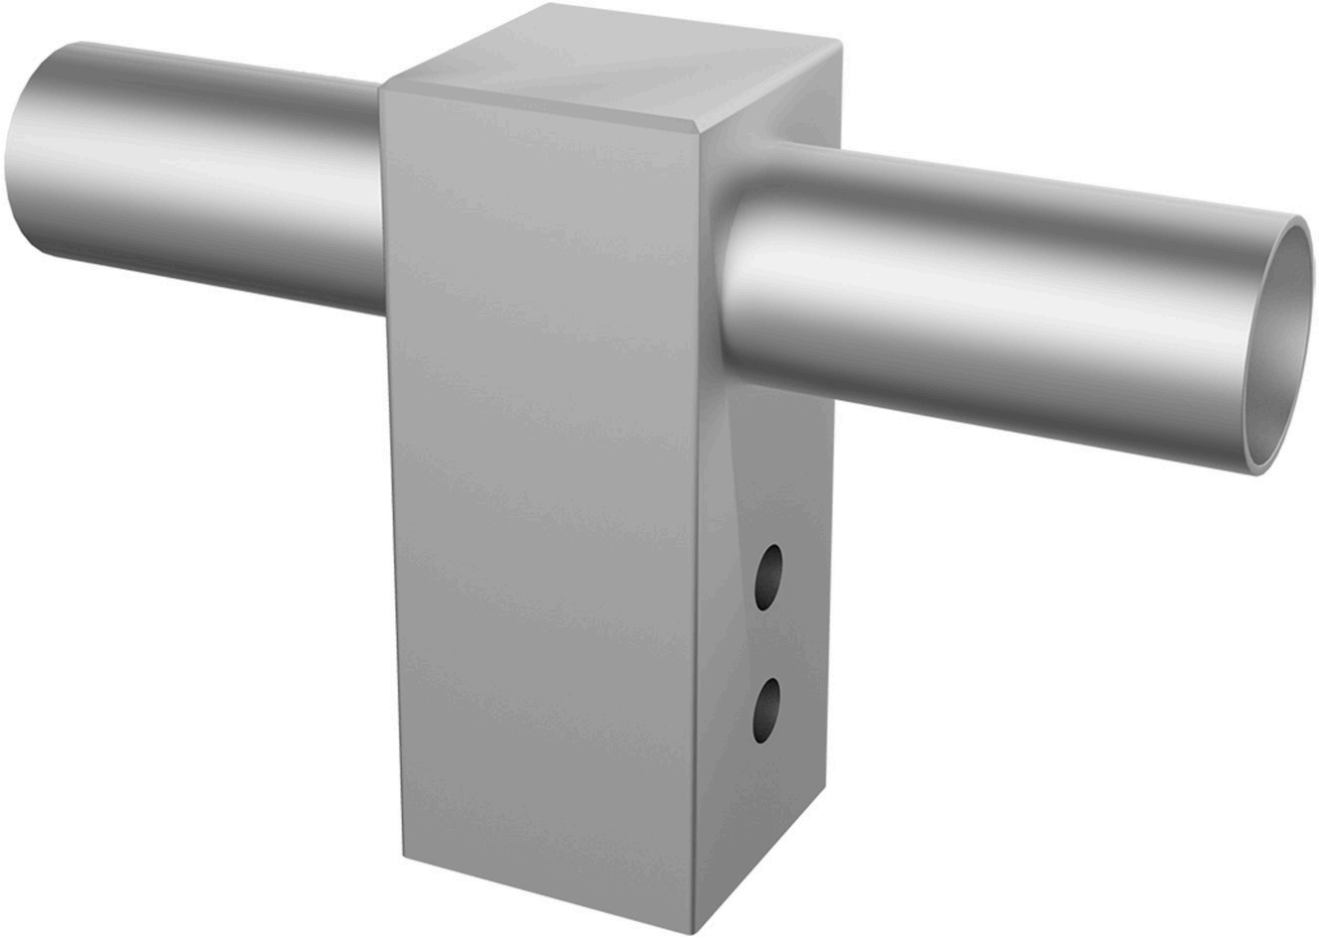



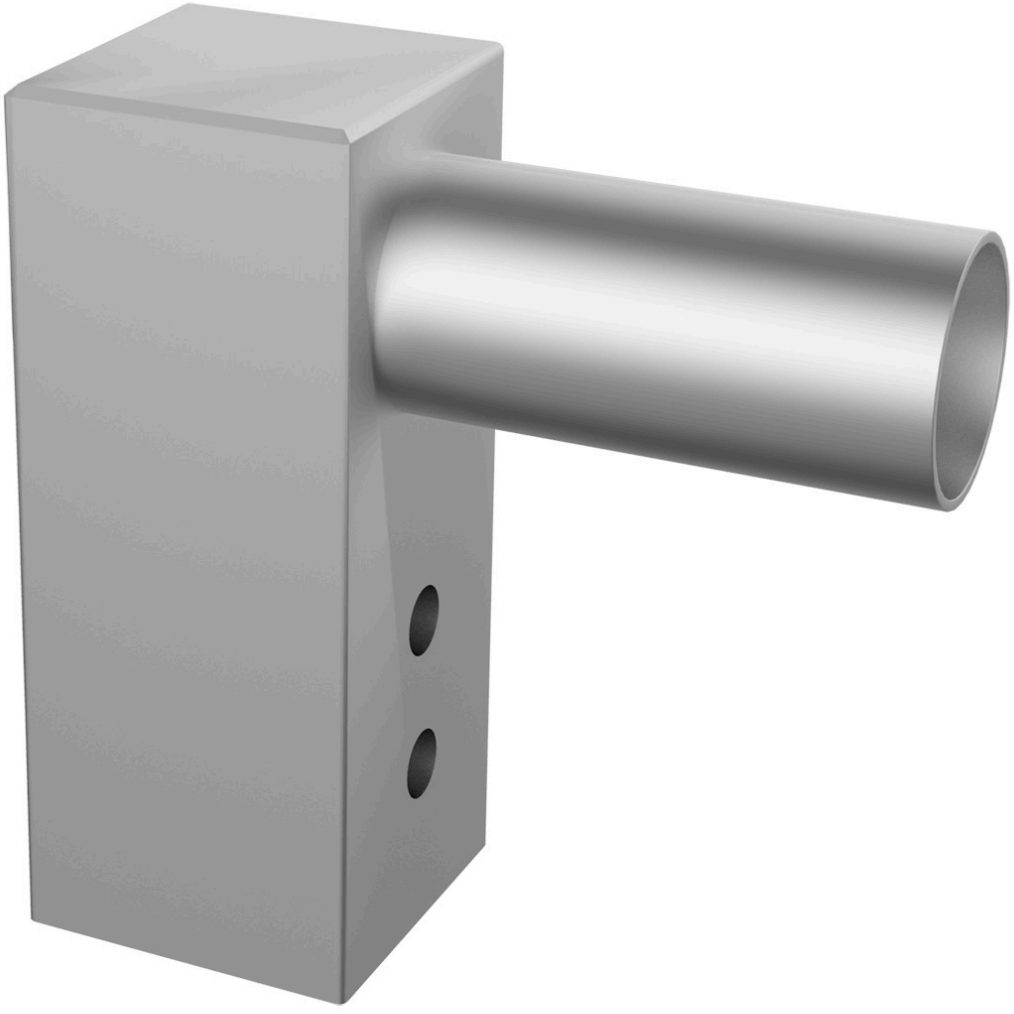














AGC lighting
WWW.AGCLED.COM


AGC lighting
WWW.AGCLED.COM


AGC lighting
WWW.AGCLED.COM


AGC lighting
www.agcled.com


AGC lighting
www.agcled.com


AGC lighting
www.agcled.com


AGC lighting
www.agcled.com
New
Collections
تسوق و اودع حقائبك

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	ST10
Power	30W, 50W, 70W, 90W, 120W, 150W, 180W, 240W, 300W
Efficacy	145lm/W
Input Voltage	100-240 VAC, 120-277VAC, 50 / 60 Hz
Power Factor	>0.95
CCT	3000K, 4000K, 5000K
CRI(Ra)	80, 70
Control	DALI, Photocell, 1-10V, PWM, Timer
Corrosion Class	C4
IP Rating	IP66
IK Rating	IK08
Mounting Option	Side entry mounting, Post top mounting, Wall mounting, Corner mounting
Warranty	5 Years
Surge Protection	6kV line-line, 10kV line-earth
Operating Temperature	-30°C to + 50°C

The product has been discontinued online. Please contact our sales representative for more information. HiSmooth-X from 30W to 300W premium street light with a unique design for road lighting and parking lighting. Smart structure, open the top cover by 45deg to detach it into two parts easily. Various professional optics for optional. Smart control, energy-saving. Various mounting adaptors for different applications. External vent avoids internal fogging and frosting. Bubble level, accurate installation in one minute. Applications Street & Roadway Car Parks & Plazas Urban & Residential Streets

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5



VIEW 6



VIEW 7