

# HA10

## Low Bay / Jelly Jar

30W / 40W / 50W / 60W / 75W

Zone 2 | Zone 21 | Zone 22

CID2 | CIID2 | CIII

NEMA 4X

160 lm/W | IP66 | IK08 | -40 °C to +65°C | Color options | Power selectable | Emergency


# Key Features

1. Lightweight design, around 5.5kg. Copper-free aluminum body, great anti-corrosion performance.




2. Features a dip switch for power adjustment. (100%,70%,40%), reduce SKU.




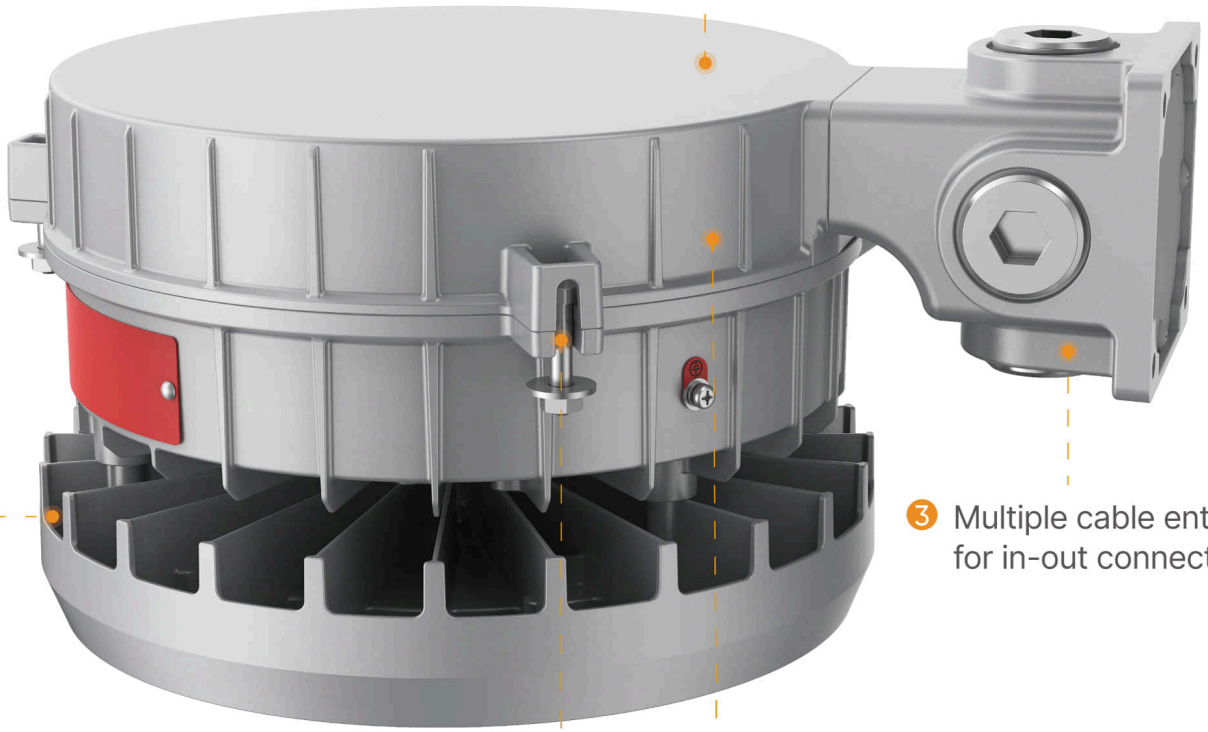

3. Multiple cable entries for in-out connection.

4. Captive screws prevent falling pieces;
Terminal block wiring for easy installation.





5. Hinged top cap for easy access to components, securely attaching the housing during wiring.





6 Provides 9W for 90 minutes, 6W for 3 hours, or 12W for 1.5 hours of emergency lighting, enhancing safety during power outages.






7 Optional glass globe featuring a smooth, dust-resistant exterior and a prismatic finish to minimize glare.






Curve grille glass


Tempered flat glass


Tempered glass+Lens

# Mounting Methods



Trunnion mount



Ceiling mount




Pendant mount with cone top



Ceiling Bracket



Trunnion bracket

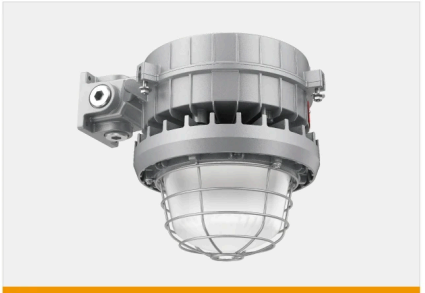

Wall bracket mount



25 Stanchion mount



30° Stanchion mount



90° Stanchion mount

## NEC&CEC

- Class I, Division 2, Groups A, B, C, D
- Class II, Division 2, Groups F, G
- Class III

## AEx:


- Ex nR IIC T5 Gc
- Ex tb IIIC T95°C/T100°C Db
- Class I, Zone 2, AEx nR IIC T5 Gc
- Zone 21, AEx tb IIIC T95°C/T100°C Db

## IECEx:

- Ex nR IIC T6/T5 Gc
- Ex tb IIIC T80°C/95°C Db IP66

## ATEX:

- II 3G Ex nR IIC T6/T5 Gc
- II 2D Ex tb IIIC T80°C/95°C Db IP66

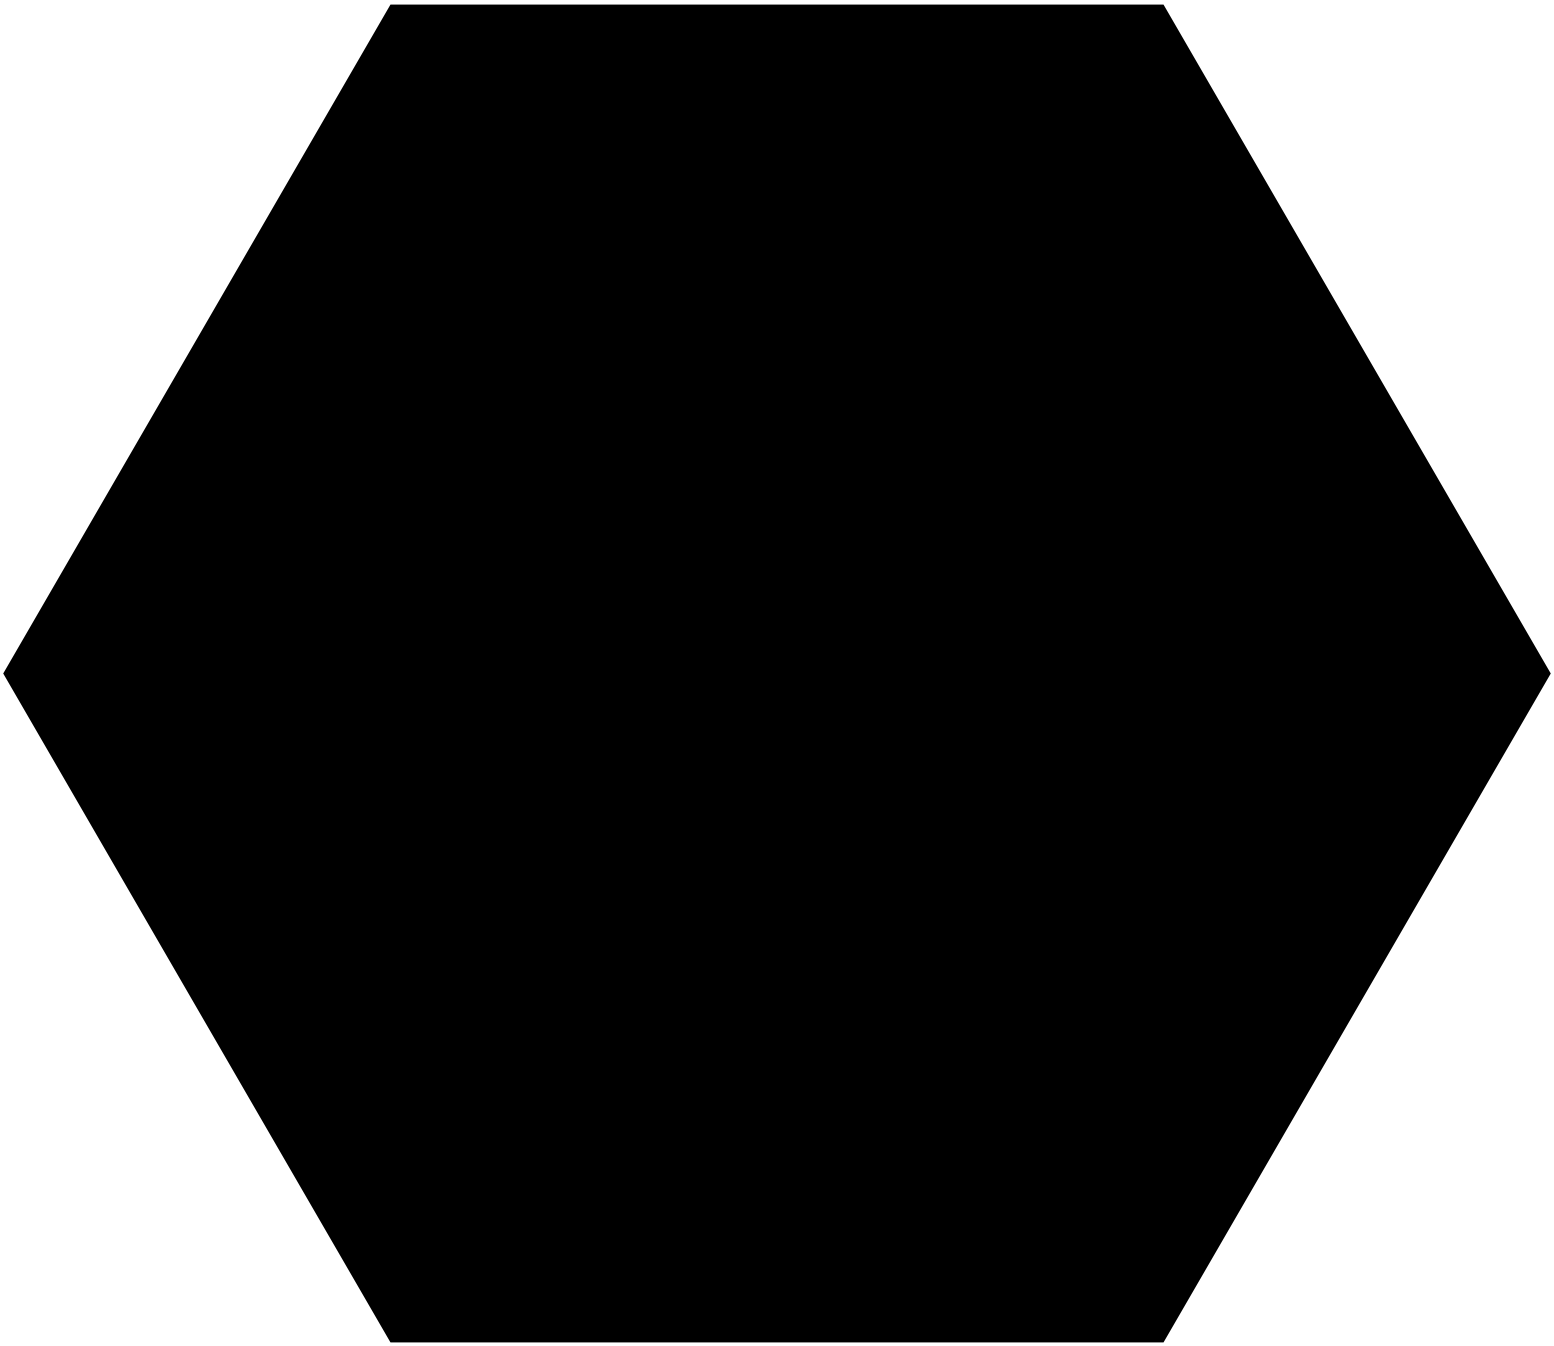


# ADDITIONAL PRODUCT SPECIFICATIONS

| | |
|---|---|
| Series Code | HA10 |
| Power | 30W, 40W, 50W, 60W, 75W |
| Efficacy | 160lm/W |
| Input Voltage | 120-277Vac, 50 / 60 Hz; 277-480Vac, 50/60Hz; 18-48Vdc / 190-315Vdc, 50 / 60 Hz |
| Power Factor | >0.95 |
| CCT | 3000K, 4000K, 5000K |
| CRI(Ra) | 70, 80 |
| Corrosion Class | C4 |
| IP Rating | IP66 |
| IK Rating | IK08 |
| Mounting Option | Ceiling Mounting, Pendant mount, Trunnion mount, Wall Bracket mount, 25°/30°/90° Stanchion mount |
| Warranty | 5 Years |

C1D2 ZONE 2 Highbay Light, 4200 to 10500 lumen, Power Selectable, light weight 5.5kg.

# PRODUCT VIEWS

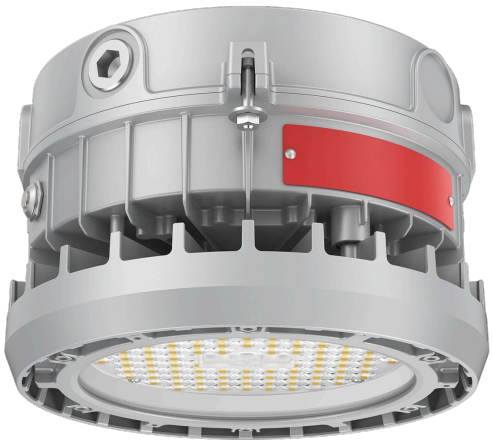

VIEW 1



VIEW 2



VIEW 3



VIEW 4