KIRITO



WP06 Norris & WP08 Cobble

Slim and elegant LED Wall Pack

IP66 | IK10 | Photocell | Emergency solution | CCT selectable | Power selectable

Dark-sky Friendly Design

Full cut-off asymmetric optic well directs the light and precisely forward-throw it to where it is needed, without light pollution, helping stargazers enjoy amazing starry skies.



SKU & Energy saving


Save SKU


Fast delivery



CCT & Power Selectable

CCT-selectable helps create flexible inventory and allows CCTs to be switched on-site based on project needs.

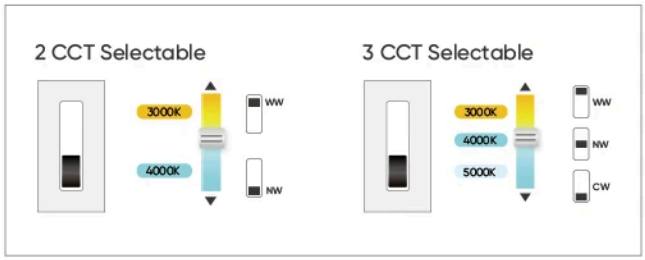

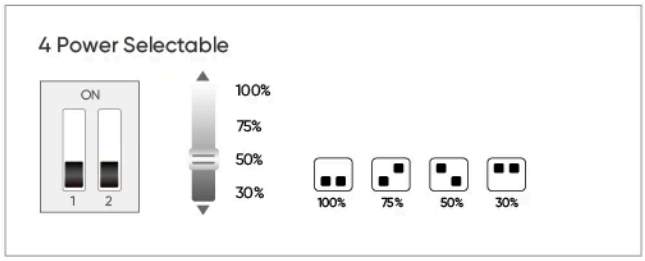

Photocell Optional

With integrated photocell to detect ambient light level, the wall light can turn on and off automatically.



Emergency Optional

Built-in emergency driver.





Power off

Power on

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	WP08 & WP06
Power	15W, 25W, 35W, 45W, 55W
Efficacy	120lm/W, 145lm/W, 140lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
Control	Photocell Control, 2.5W3H emergency backup optional
IP Rating	IP66
IK Rating	IK10
Mounting Option	Wall mounting
Warranty	5 Years
Surge Protection	4kV line-line, 6kV line-earth
Operating Temperature	-30°C to + 50°C

WP06 & WP08 are innovative design inspired by the shape of pebble, suiting various modern urban applications. Its CCT & power selectable option makes it suitable for wholesale.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4