
Product Overview

Three Dimensions

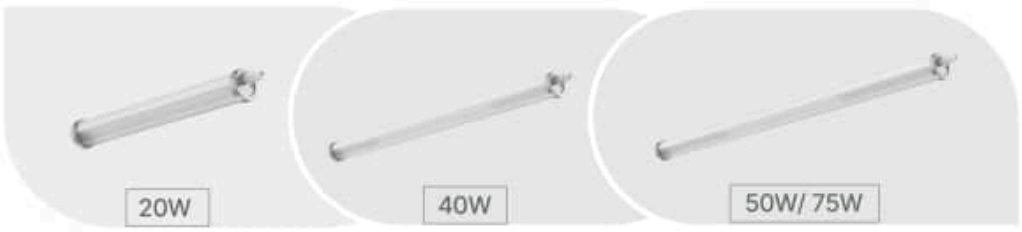

Powerful & Efficient

Good luminous efficacy and high luminous flux for energy saving.

165

lm/W

UP TO EFFICACY

12375


lm

UP TO FLUX

Strong Anti-corrosion

Housing made of PMMA for resistance to ammonia NH_3


Screws and end caps made of 316 stainless steel for corrosion-resistance.

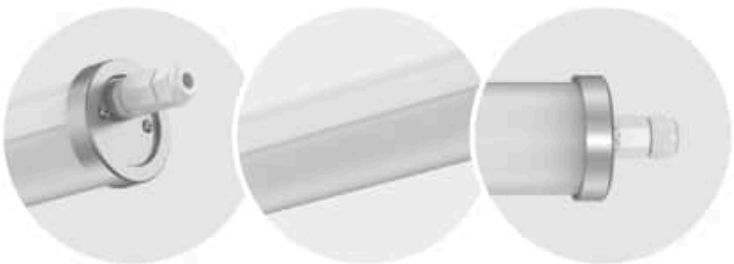

KIRITO

Quick Connection

Thanks to the convenient quick connectors
The luminaire can be easily connected
without the need to open it.

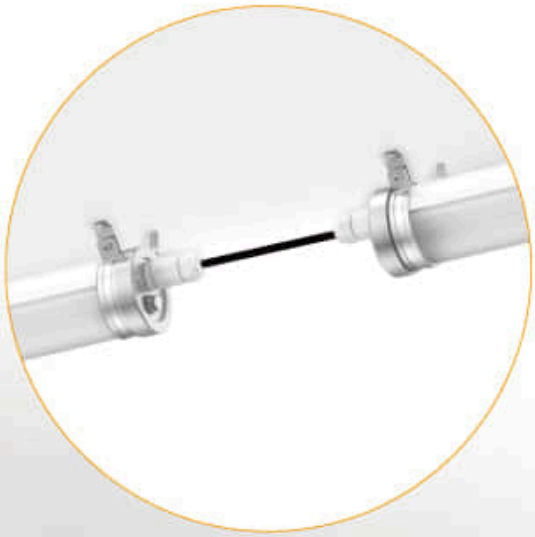



Multi-Applications



Farm Livestock | Food Processing Factory | Car Washing Factory | Office

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	LHB44
Power	20W, 40W, 50W, 75W
Efficacy	165lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
IP Rating	IP66
IK Rating	IK08
Mounting Option	Ceiling Mounting, Wire Suspension
Warranty	5 Years
Operating Temperature	-30°C to + 50°C, -30°C to + 40°C

LHB44 CorroLine features PMMA housing and 316 stainless steel end caps with stronger ammonia-resistant and anti-corrosion properties. It offers a power range from 20W to 75W and achieves efficacy up to 165lm/W, one wide 120° beam is suitable for most applications such as animal farms, swimming pools (anti-chlorine gas), and chemical factories.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5