

Angle ST37

a classic
aesthetic

vibration test

KIRITO

Three Size-Available In 30 - 300w

This fixture is not only a great solution for new construction applications, but also retrofit as a single product which can replace up to one 1000W metal halide luminaires

300W

1000W

METAL HALIDE LUMINAIRES



200/300W

100/150W

30/40/60W

Versatile Mounting

Versatile mounting options can be used in a variety of occasions, effectively reduce the inventory cost









Superior Design Construction

Anole luminaires is specifically designed to provide one-for-one solutions for replacing HID lighting.



Die cast aluminum housing finished standard in a black powder coating.

Vertical heat fins that are optimal for heat dissiopation while keeping smooth outer surface.




Weep holes serve an important purpose for water to escape the housing envelope.



Big driver compartment. Several types of drivers available and enough space to install intelligent devices.

Optical Distribution

Anole series is outfitted with a polycarbonate lens for maximizing target zone illumination, and is offered in Type II, III, IV and V distribution patterns

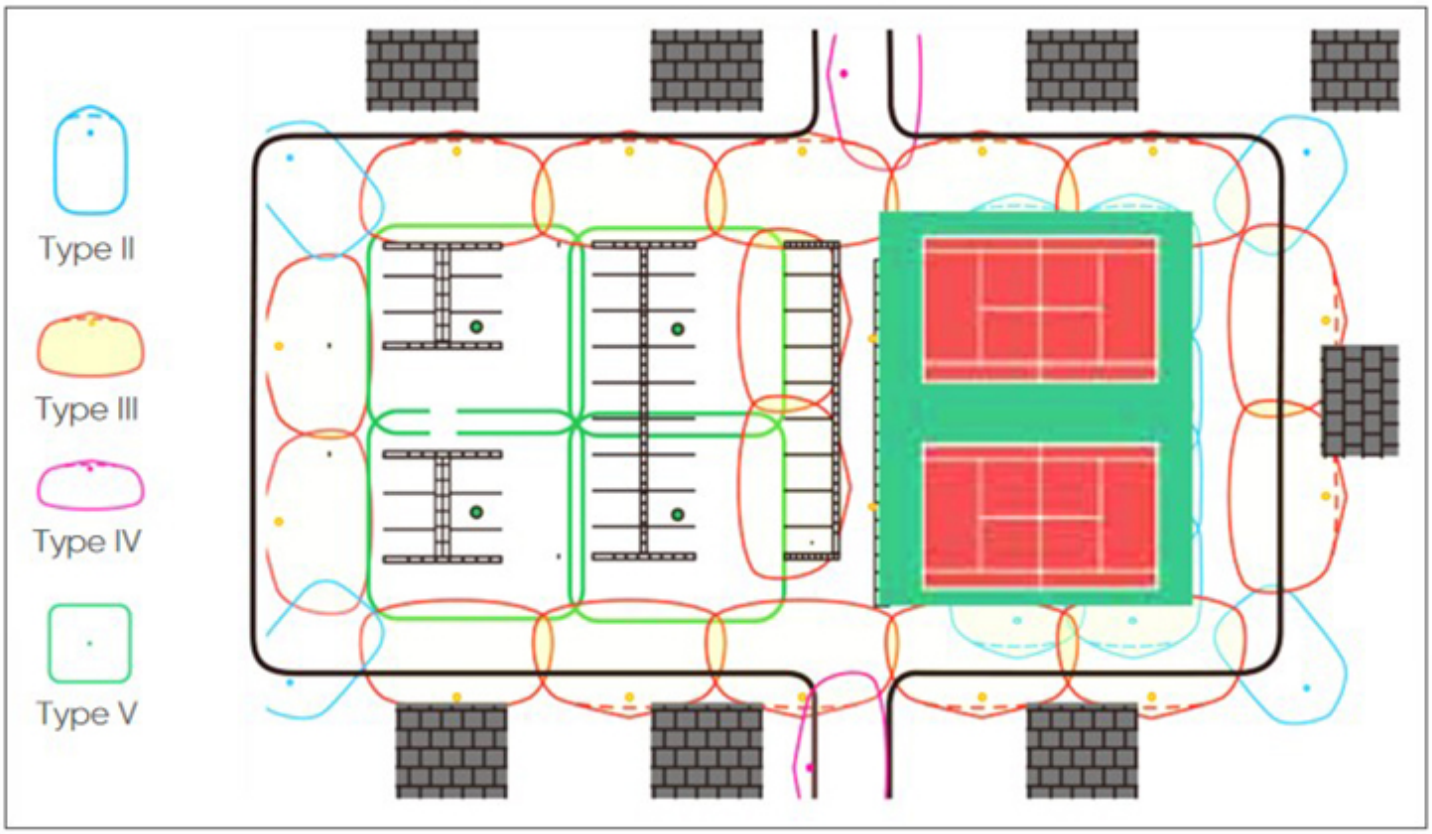

Integrated Controls

Controls in area/site applications save energy, extend luminaire life and allow customizable solutions. Sensors control light output based on area utilization and are used for energy savings and local code compliance





Microwave motion sensor



Microwave sensor

PIR Sensor




REMOVE
ENLEVER
NORTH
NORD
JL-205C
PHOTOCONTROL
CELLULE PHOTOÉLECTRIQUE
INSTALL
INSTALLER


BRIGHTNESS
70%
80%
90%
100%
SENSITIVITY
20%
50%
75%
100%
HOLD TIME
10s
1m
5m
10m
15m
20m
30m
60m
DAYLIGHT SENSOR
10
30
50
100
300
500
STAND-BY
TIME DIM
0%
10%
30%
50%
+∞
1m
30m
60m
ON/OFF
DISP
SEND
AUTO
OK
RESET
TEST
2s
MODE1
MODE2
MODE3
MODE4





ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	ST37
Power	30W, 40W, 60W, 100W, 150W, 200W, 300W
Efficacy	145lm/W, 155lm/W
Input Voltage	120-240VAC 220-240VAC, 50 / 60 Hz
Power Factor	>0.92
CCT	5000K, 4000K
CRI(Ra)	70, 80
Control	Plug-and-play Microwave, PIR Sensor, Zhaga Socket
IP Rating	IP65
IK Rating	IK08
Mounting Option	integral slipfitter, Yoke, Square pole, Round pole
Warranty	5 Years, 10 Years
Surge Protection	6kV line-line, 10kV line-earth
Operating Temperature	-30°C to + 45°C

The product has been discontinued online. Please contact our sales representative for more information. Anole offers economical area lighting solutions with advanced thermal management, simple heat sink, and surge protection. It provides sustained performance without compromising quality for various applications. 30W/40W/60W/100W/150W/200W/300W, to replace75W to 750W HID luminaires. The LED driver chamber can be opened separately Different types of mounting brackets are available in options, such as a pole-arm (square or round), slip fitter, trunnion, and U bracket as a floodlight. Optional backlight control shield Plug-and-play sensors ANSI 3G rated for high-vibration applications Compact and lightweight design with low EPA 5 years warranty or 10 year warranty options Applications Park & City Centre

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5