

FL45 Hi-Mars

Field Adjustable Flood Light

FL45 was designed to maximize versatility, 75W -300W, 3 different installation ways and CCT & Power selectable that makes them the optimal floodlight for a large variety of general-purpose applications

150lm/W | 1-10V | IK08 | IP66 | -30℃~+50℃ | 5 years warranty

75W-300W with 3 different installation ways

which can meet many different needs of projects



Yoke Mount




Wall Mount




Slipfitter

3 CCT & 4 Power Selectable

which could effectively help you to save your SKU and cash flow

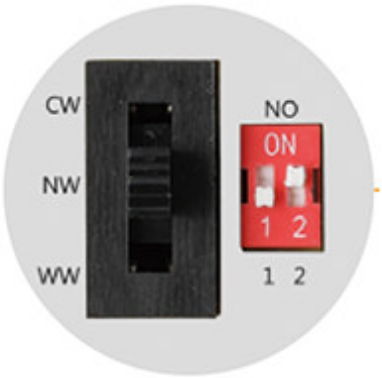



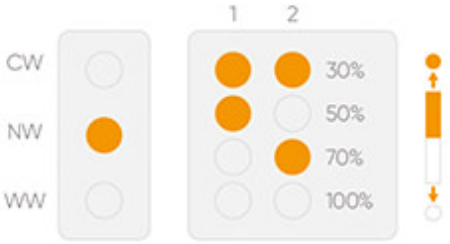



Lens+Tempered Glass

Photocell Selectable





Optimal heat management designed with separate volumes for the LED modules and the driver


REMOVE
ENLEVER
NORTH
NORD
JL-205C
PHOTOCONTROL
CELLULE PHOTOÉLECTRIQUE
INSTALL
INSTALLER







ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	FL45
Power	75W, 100W, 120W, 150W, 200W, 240W, 300W
Efficacy	150lm/W
Input Voltage	100-277VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
Control	Photocell, Dimmable, Non-Dimmable
IP Rating	IP66
IK Rating	IK08
Warranty	5 Years
Operating Temperature	-30°C to + 50°C

The product has been discontinued online. Please contact our sales representative for more information. HiMars FL45 LED Flood Light is available in two sizes, wattage packages range from 75W to 300W so that it can meet various applications. FL45 comes with field-adjustable color temperature and power option as well as smart control like photocell. It's also available with various mounting options, including a slipfitter mount, a Yoke mount, and a trunnion mount for flexible installations. There's no doubt that this new product could effectively help you to save your SKU and cash flow.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5