KIRITO



FL77 Vero

Valuable Flood Light



Classical and robust design with versatile beam angle options and superior price performance.

50-300W

Up to 160lm/W

IP66

IK08

Reliable Design

5 sizes covering 50W to 300W, achieving the perfect balance between affordability and industrial-grade durability.







Versatile Optics

The professional lighting distributions is ideal for general sports & area lighting purpose, powerful and precise.



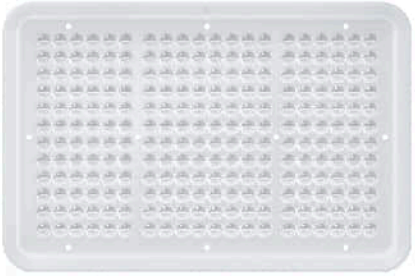

- PC lens is covered by tempered glass avoids yellowing & aging, which greatly ensure the high lighting emission and longer lifespan.
- Easy to interchange with current lens, making it easy to stock up.

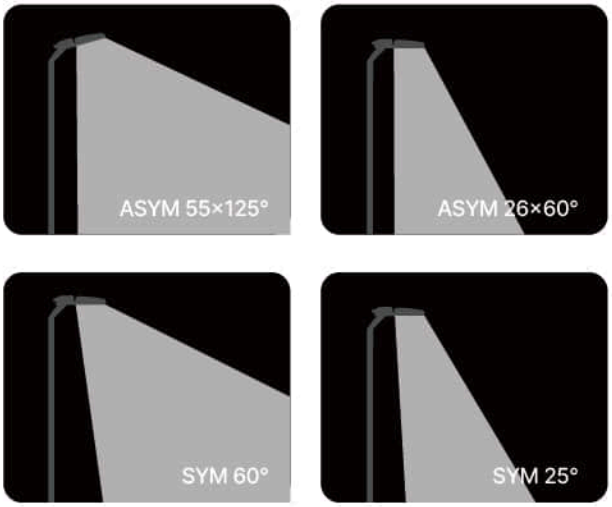


Longer Service Life

Vent diaphragm valve avoids condensation, improving performance and lifetime.



Precise Mounting

The embedded graduated scale enables precise luminaire tilt adjustment.

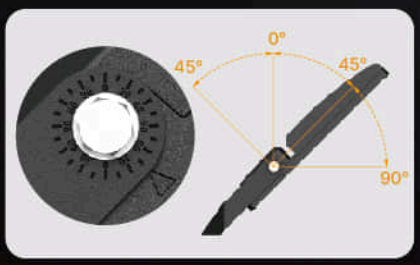

Saving Labor

Bend bracket simplifies the installation and labor lower.



KIRITO

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	FL77
Power	50W, 100W, 150W, 200W, 300W
Efficacy	Up to 160
Power Factor	>0.92
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
Corrosion Class	C3
Class Electrical Equipment	Class I
IP Rating	IP66
IK Rating	IK08
Mounting Option	Pole Mounting, Bracket Mounting
Warranty	5 Years
Operating Temperature	-30°C to + 50°C

Vero is a slim, classic floodlight that strikes the perfect balance between cost and performance. Ranging from 50W to 300W, it features versatile beam angles ideal for general sports and area lighting. A tempered glass cover protects the PC lens from yellowing and aging, ensuring consistent light output and a longer lifespan. The vent diaphragm prevents condensation, enhancing durability. For easy installation, Vero includes a graduated scale for precise tilt adjustment. With IP66 and IK08 ratings, it ensures reliable performance in outdoor conditions.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3