

WP09

Full-cut off asymmetric optic design LED wall pack realizes better light control and meets high standard request 0% upward light in the market.

135 lm/w | IP66 | IK10 | Photocell | Emergency solution | CCT selectable

KIRITO

Dark-sky friendly design


Full-cut off asymmetric optic design well directs the light and precisely foward-throw light to where it needs.

3 CCT adjustable

With a built-in dip switch, 3 CCT adjustable solution is available for 14W and 25W, which can greatly help save SKU and meet fast delivery time as request.

Save SKU

Fast delivery

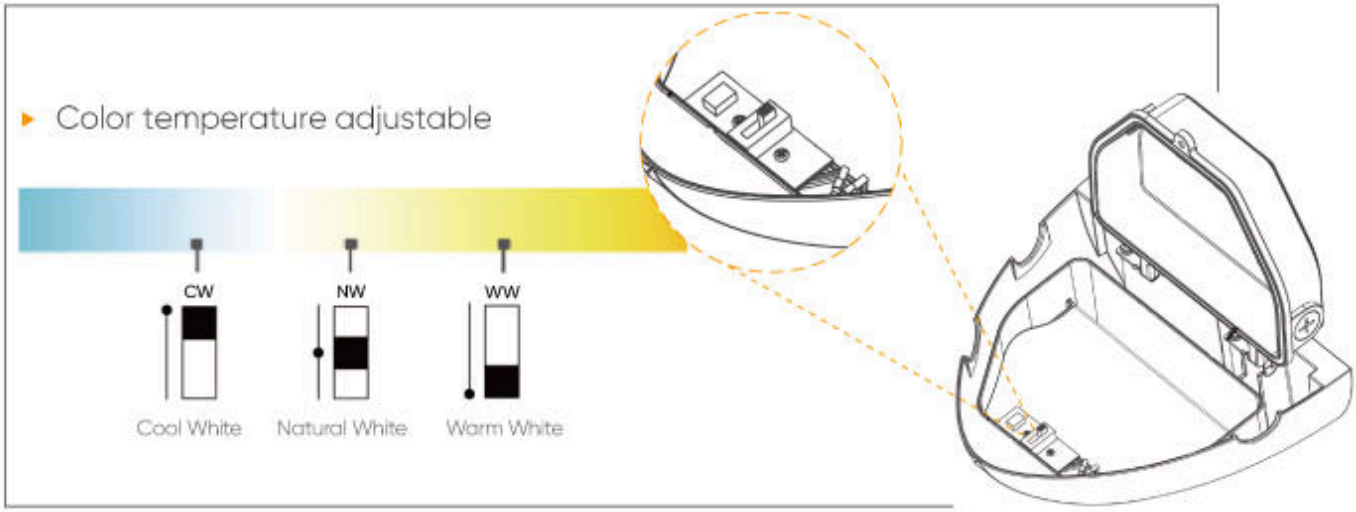

Precise adjustment

Withan a integrated photocell, wall pack only turn on when it is in darkness. It is more energy-saving based on high efficacy 135lm/w.







Power off




Power on

Emergency Lighting Solution

2W3H Emergency kit can be put in the housing.




2W3H
Emergency (optional)

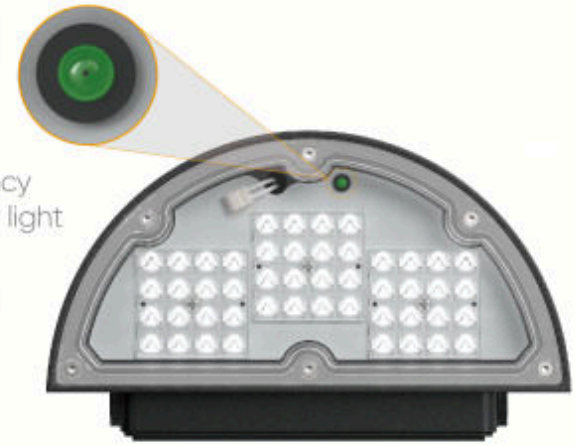


Emergency
indicator light

Easy Installation

Easy wiring with two options from the back or the side.

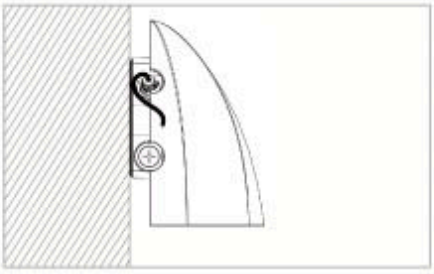

Side wiring

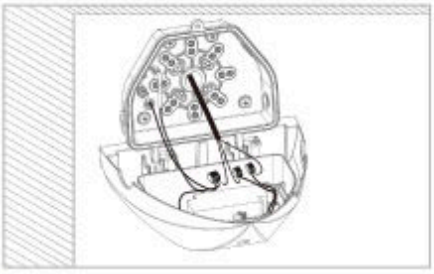

Back wiring

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	WP09
Power	14W, 25W, 40W
Efficacy	135lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3 CCT Selectable (3000K, 4000K, 5000K)
CRI(Ra)	70, 80
Control	Photocell, 2W3H emergency backup optional
IP Rating	IP66
IK Rating	IK10
Mounting Option	Wall Mounting
Warranty	5 Years
Surge Protection	0.5KV line-line, 1KV line-earth
Operating Temperature	-30°C to + 45°C (Standard), 0°C to + 40°C (Emergency)

The product has been discontinued online. Please contact our sales representative for more information. WP09 comes with a slim, elegant, and compact design. Durable die-casting aluminum housing with PC lens makes it dirt and water-proof, IP66 and IK10 rated. Full cut-off asymmetric optic design for well light control to obtain 0% upward light, which meets with high standard requests in the market. Lumen efficacy up to 135lm/W @ 4000K Ra80. Photocell is available for more energy-saving. 15W and 25W are able to do 3CCT selectable functions, which can greatly help save SKU and meet fast delivery time as requested. Photocell, emergency, and CCT selectable all-in-one solution is the right and powerful solution that you may need. High lumen efficiency and small in size. 3 CCT Selectable (3000K, 4000K, 5000K). Housing: made of die-casting aluminum. Optic: Full cut-off asymmetric lens for 0% uplight. Body color: textured black RAL 9017. Photocell, built-in emergency kit optional. Applications: for hotel lobby, conference rooms, corridors and auditoriums to entryways, courtyards, facades and awnings, etc.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4