LINKLITE LHB22

160 LM/W

Up-light Optional

LOW UGR Visual Comfort

DALI 2



Upgrade LED Linear Trunking System


Maximum Connection Quantity

Model	Single-phase(240Vac)	Three-phase(240Vac)
40W	70PCS	210PCS
65W	50PCS	150PCS
75W	40PCS	120PCS

Uplight is optional, working in 20W.
The connection quantity is different if choosing uplight control.

UP- LIGHT

It can illuminate office ceiling,
creating a comfortable environment.

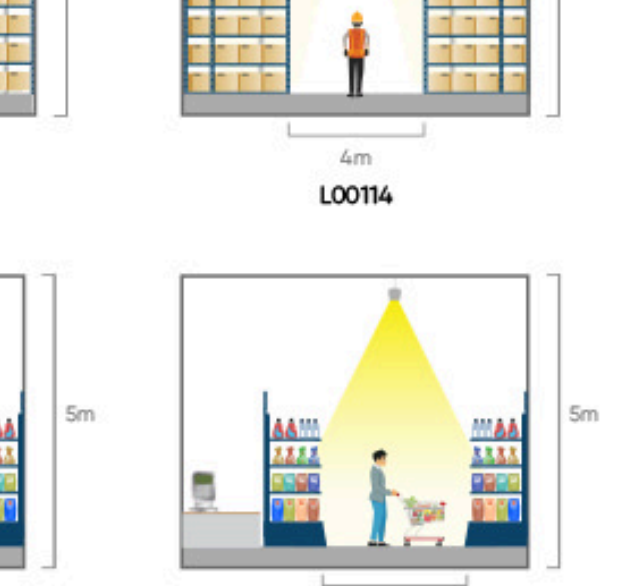


LOW UGR

Thanks to the Fresnel lens and reflector,
it has excellent anti-glare ability.



Integrated Design


Several parts can be linked together in one by connectors. This kind of all-in-one design makes installation easier and faster.

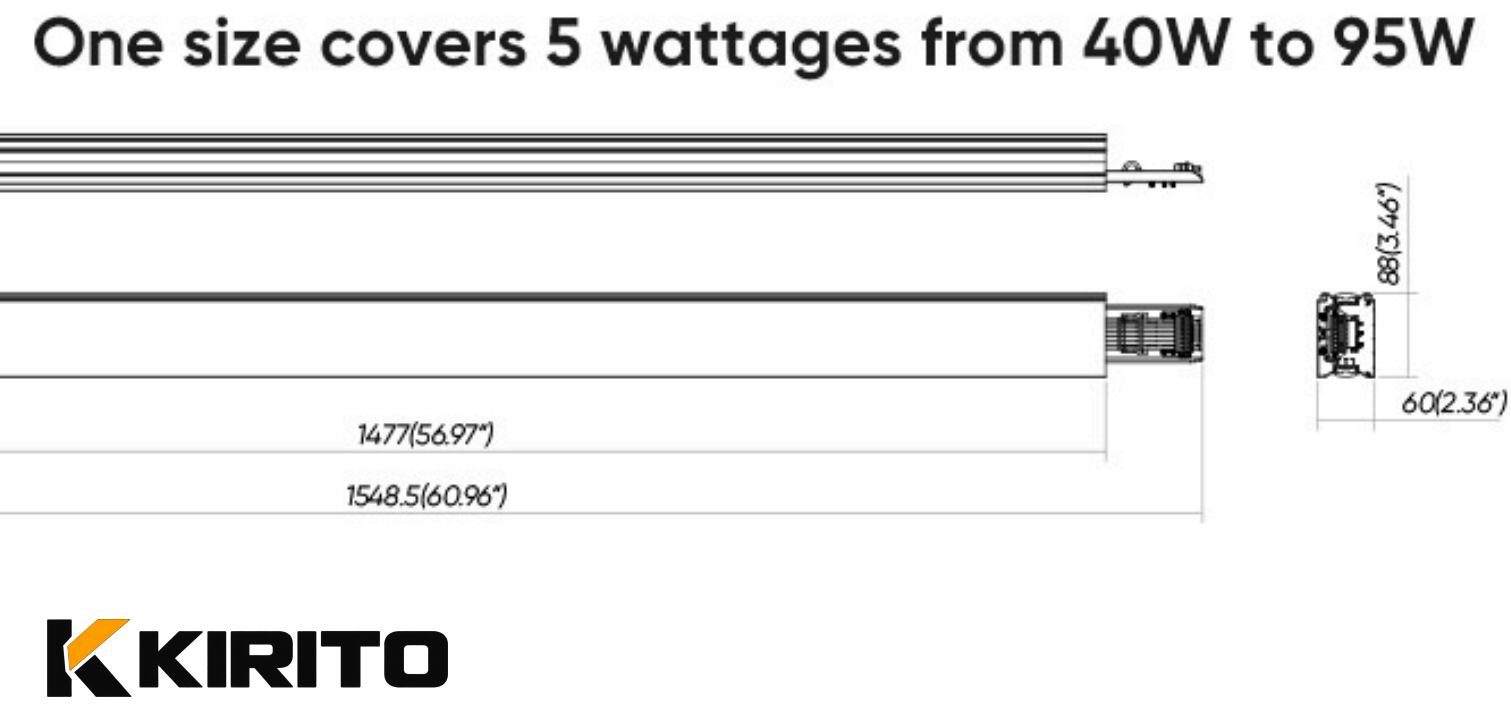

LinkLite's side could be opened easily, which brings much convenience for maintenance.

One size covers 5 wattages from 40W to 95W

KIRITO

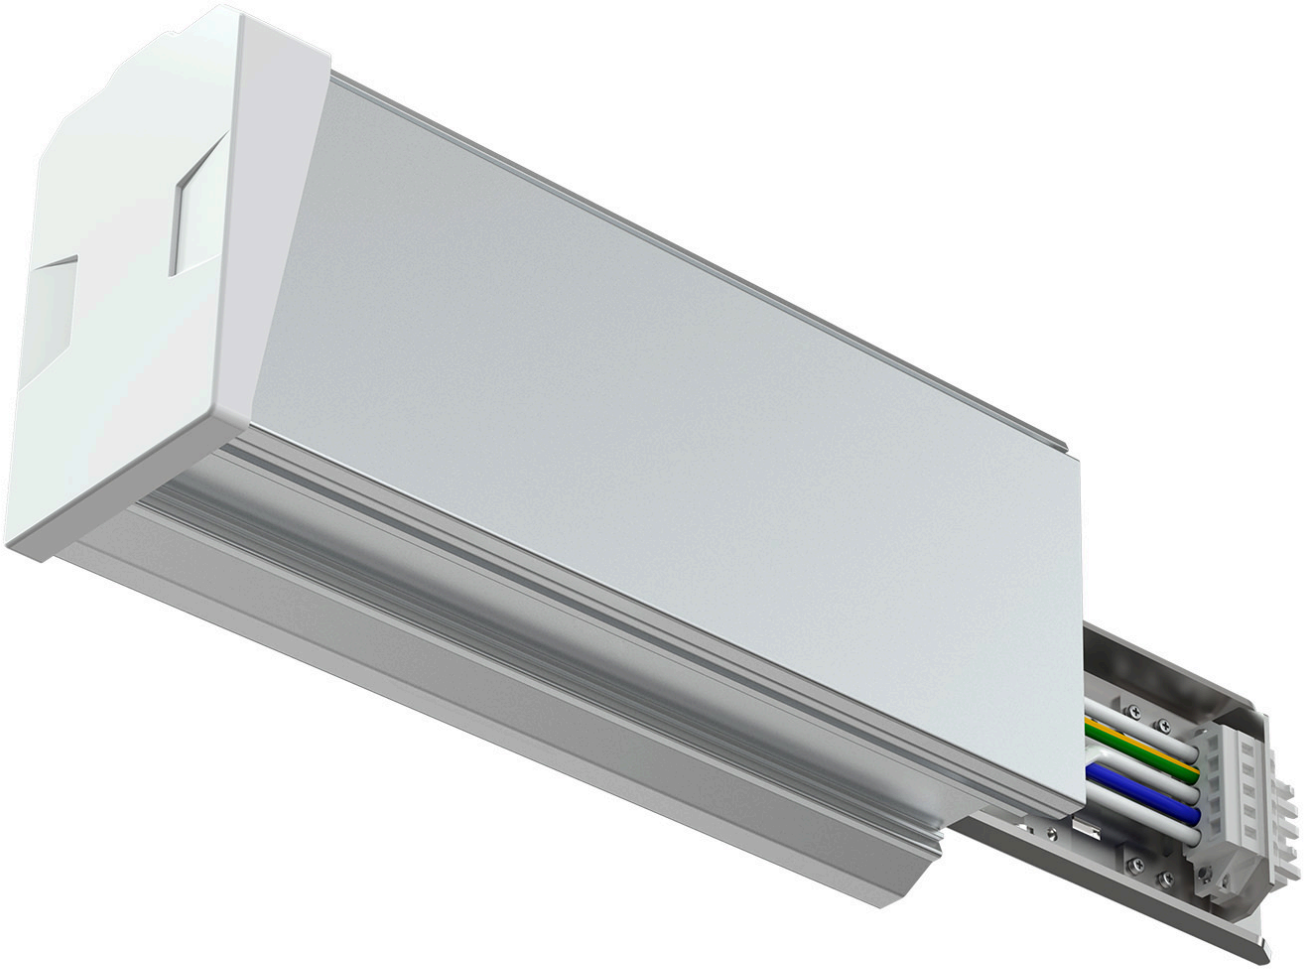








ADDITIONAL PRODUCT SPECIFICATIONS

The product has been discontinued online. Please contact our sales representative for more information. LHB22 is an upgraded model of LHB04/LHB05. It can be link-able, dimmable with up-light optional. The high efficiency and multiple light distributions make them ideal for many industrial uses, such as supermarkets, warehouses, large indoor places, etc. LED Trunking system Anti-UV cover The upward-facing direction is optional Multiple optics Multiple mounting options Convenient wiring on the side

PRODUCT VIEWS

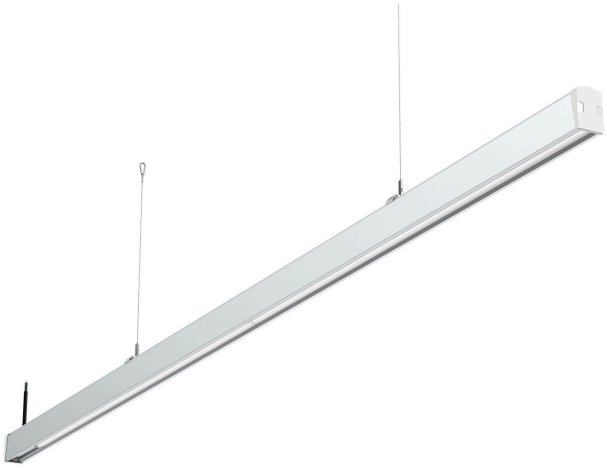

VIEW 1



VIEW 2



VIEW 3



VIEW 4