Tiger-Shark


Ground-breaking Emergency LED driver




Flexible inventory

Attached to dimmable led lights



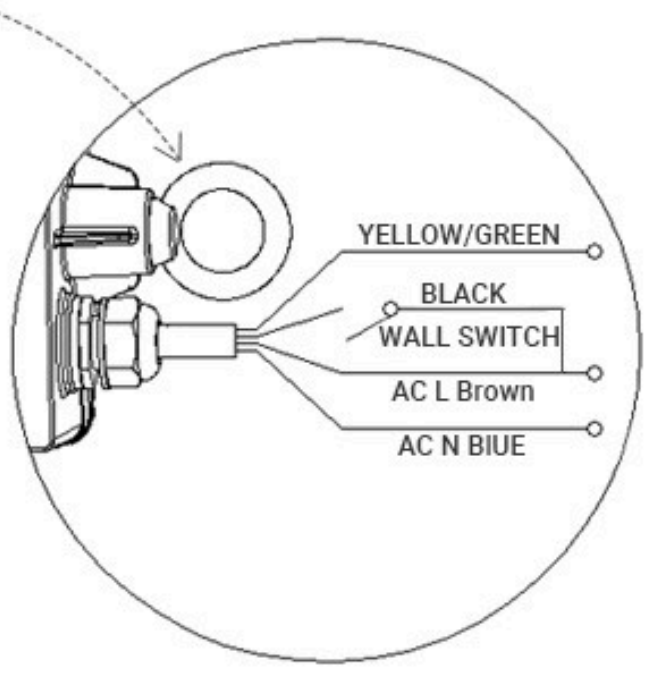

220-240VAC 50/60Hz

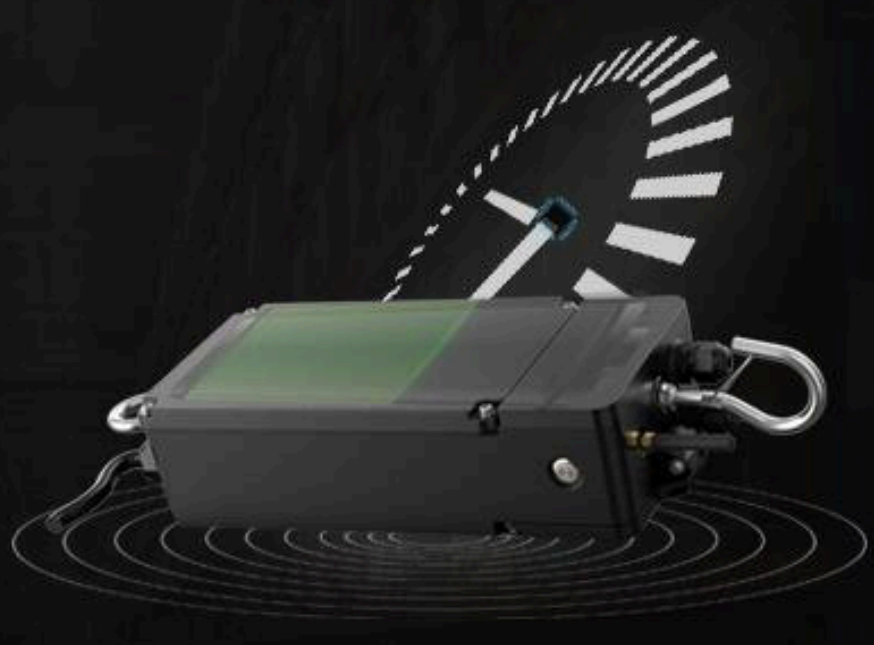

LiFePO4

- ✔ IP65 and IK08 protection
- ✔ **LiFePO4 battery:** high temperature resistance, long lifespan, long endurance

Working Mode


It works with 1-10V/0-10V/ dimmable LED lights and dims the fixture into 10% at emergency

LuminaireWattage	Emergency Wattage	Emergency Time
100W	10W	3hrs
150W	15W	2hrs
200W	20W	1.5hrs

The emergency wattage depends on the connected luminaire wattage.The lower luminaire wattage is, the lower emergency wattage and longer emergency time will be. Attached to Max 200w luminaire.

Self-inspection function

① Manual push button

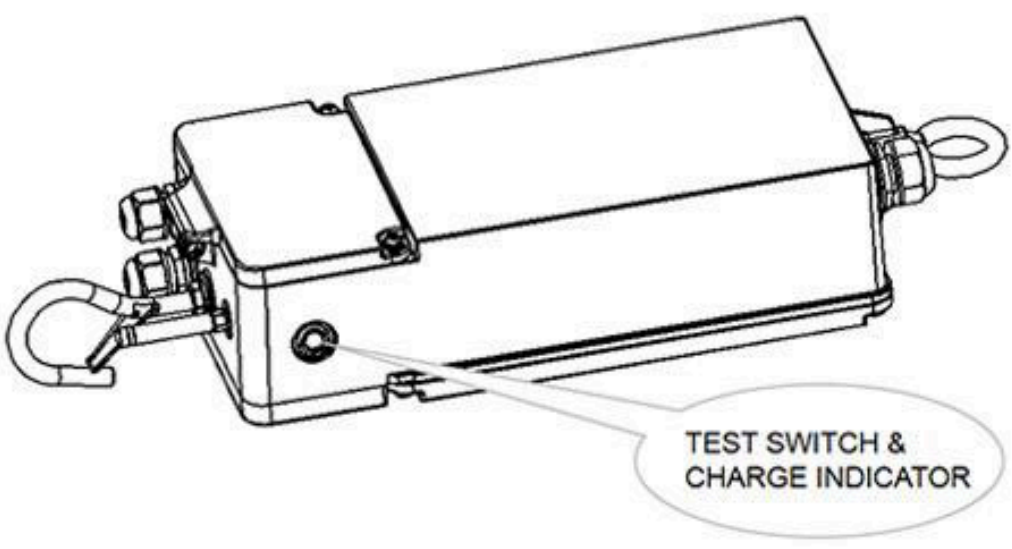


② Wireless remote control for self-inspection

During AC input operation, press A to enter emergency working mode
Press B to cancel emergency mode and turn back to AC input working mode.

Easy installation

Clear wiring board to reduce wiring wrong probability



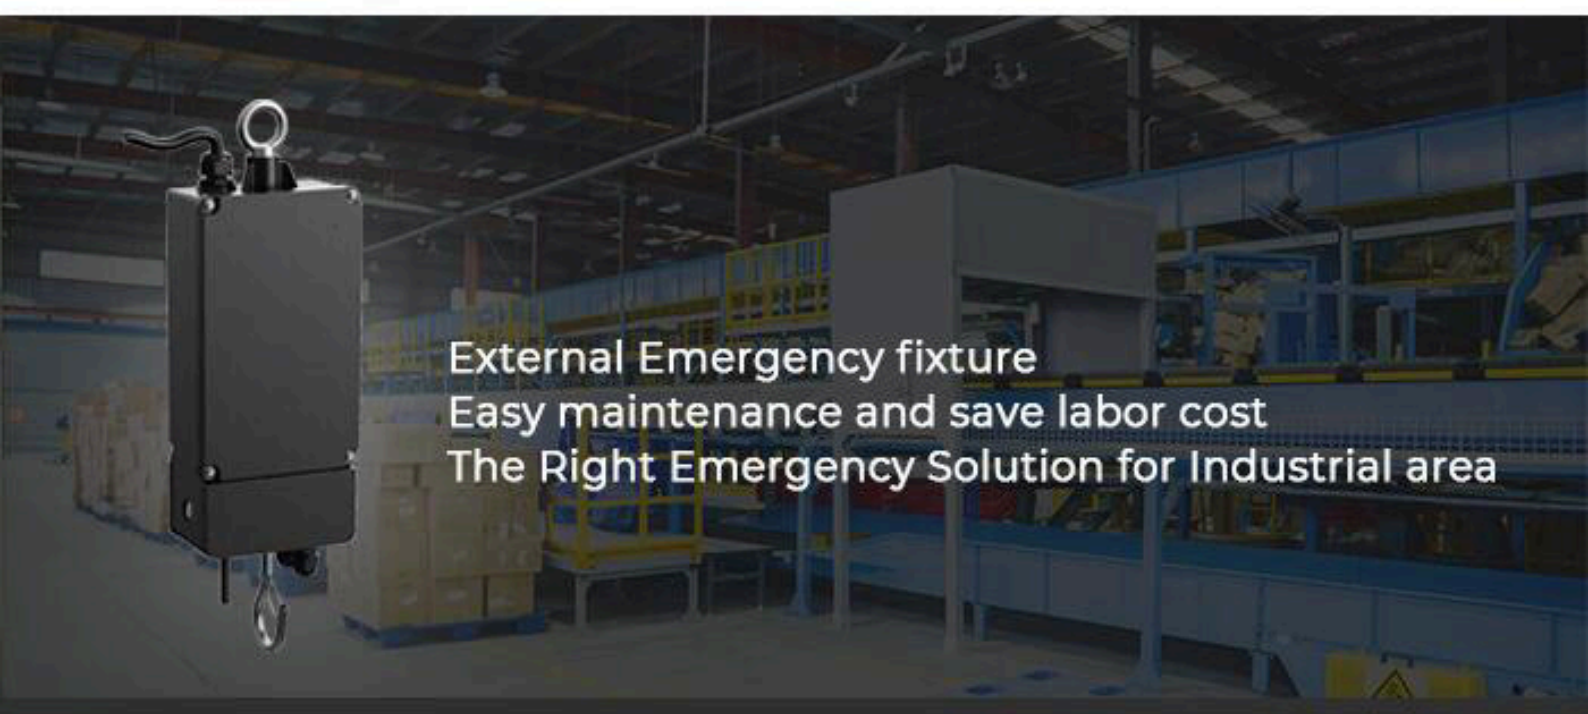

External Emergency fixture
Easy maintenance and save labor cost
The Right Emergency Solution for Industrial area

More details ? Email or Call us now We are here!

KIRITO

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	Tiger-Shark
Power	10W, 20W
Input Voltage	220-240VAC, 50 / 60 Hz
IP Rating	IP65
IK Rating	IK08
Mounting Option	Loop Hanging
Warranty	3 Years
Operating Temperature	0°C to + 45°C

The product has been discontinued online. Please contact our sales representative for more information. The LED emergency light supports lasting 3 hours emergency lighting when power off, there are 4W/8W emergency DC light bulb optional, and it can work with a variety of high bay perfectly, such as HB36, HB38, and HB44. Stocking this emergency kit could achieve quick delivery maintained emergency solution. High output voltage Constant output power Self-testing Battery: over temperature protection IP65 & IK08 double protection 4W/8W for optional 3 hours lasting time

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3