


KIRITO







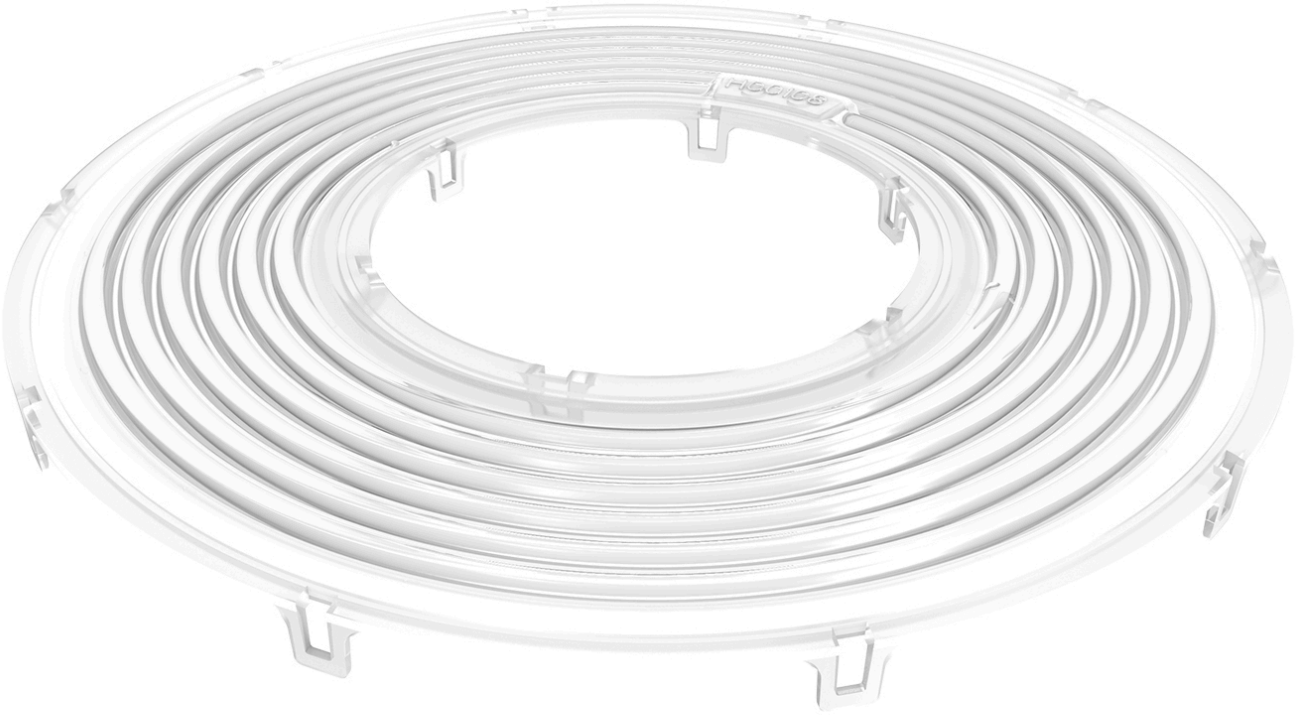


BRIGHTNESS
70%
80%
90%
100%
SENSITIVITY
20%
50%
75%
100%
HOLD TIME
10s
1m
5m
10m
15m
20m
30m
60m
DAYLIGHT SENSOR
10
30
50
100
300
500
STAND-BY
TIME DIM
0%
10%
30%
50%
+∞
1m
30m
60m
ON/OFF
DISP
SEND
AUTO
OK
RESET
TEST
2s
MODE1
MODE2
MODE3
MODE4





ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	HB44
Power	100W, 120W, 150W, 200W
Efficacy	150lm/W, 160lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.95
UGR Level	25
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
Control	Dimmable, Non-Dimmable, Microwave Sensor, PIR Sensor
IP Rating	IP65
IK Rating	IK08
Mounting Option	Loop Hanging, Ceiling Mounting
Warranty	5 Years
Surge Protection	4kV line-line, 6kV line-earth
Operating Temperature	-30°C to + 50°C

The product has been discontinued online. Please contact our sales representative for more information. When equipped with Bluetooth function driver, HiNova is the first Human Centric Lighting solution in industry lighting field, which is helpful for human health and productivity. Bluetooth wireless control. 0-100% brightness adjustable. 3000K-5000K CCT tunable. Groups control. Time-based scene setup. Applications: For indoor and outdoor high ceiling applications, like warehouses, industrial facilities, exhibition centers, shopping malls, stadiums, toll stations, etc.

KIRITO

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4