KIRITO



FL51 Gini

A Certified DOB Floodlight

From 50W to 300W, Suits the Basic Needs

IP66

120 lm/w

5 YEARS
Warranty

120LM/W in DOB Scheme, Up to 300W

Wide Application for Park, Garden, Parking Lot, Sports Court, Industrial, Etc.



300W 200W 150W 100W 50W






Driver-on-Board with Novel Design

Slim Body Provides Super Light,
Makes Gini an Economic Solution.



Tempered Glass & Anti-glare 90deg Optic

Built-in Honey-Comb Reflector, More Comfortable Visual Feeling

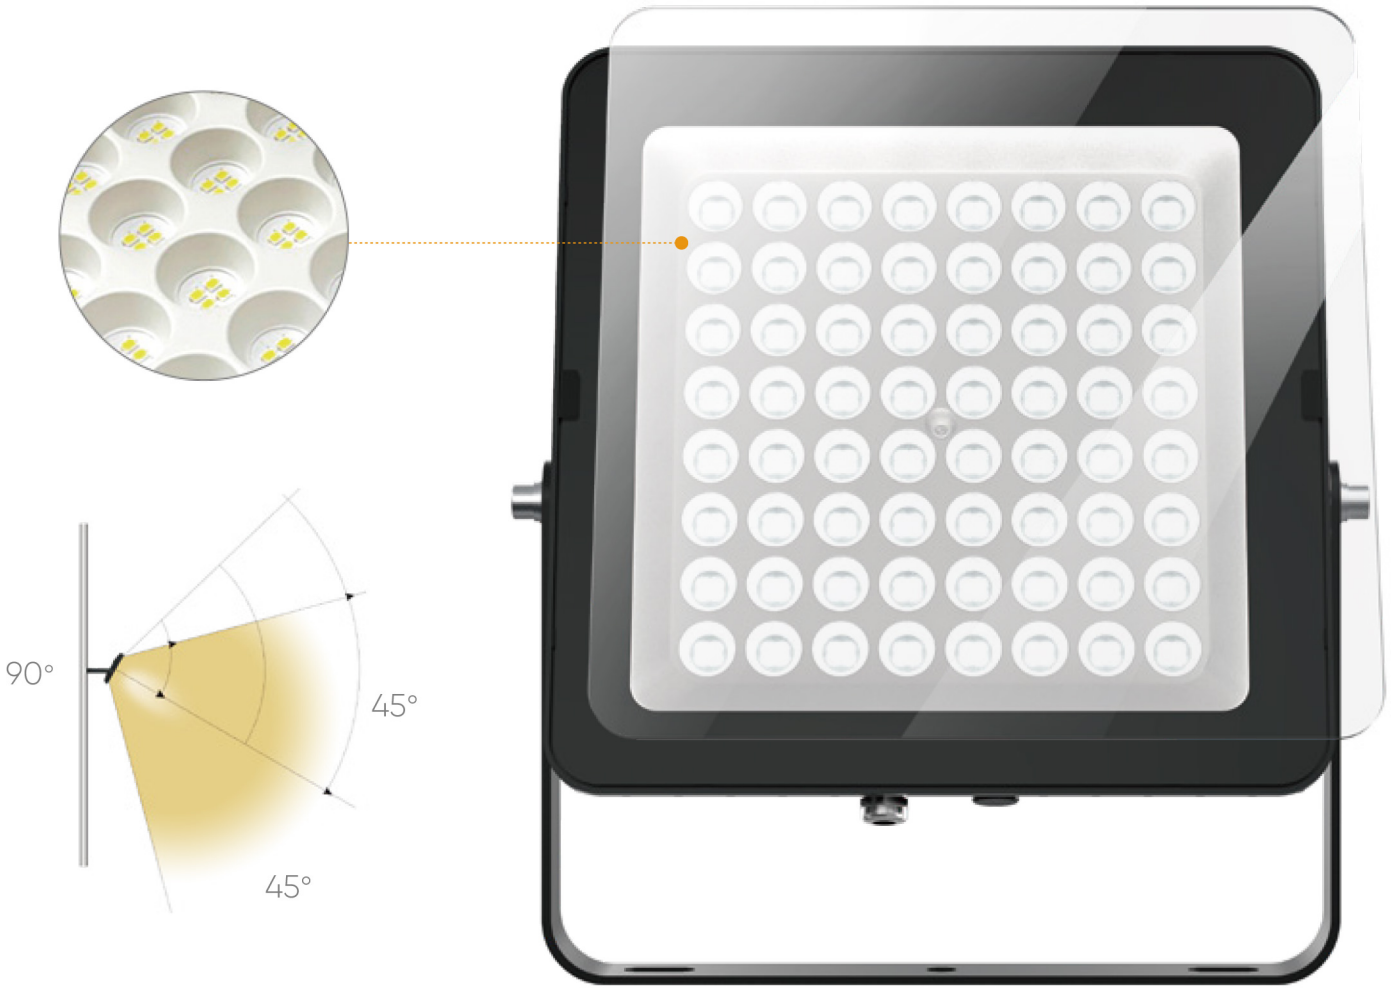

Simple Design, Attention to Destails


Optimum Thermal Management
-30~+50℃ Working Temperature

A Vent Helps Keeping Air Balance Well and Avoiding Fog



Easy Installation

Bracket Adjustable in +/-180DEG;

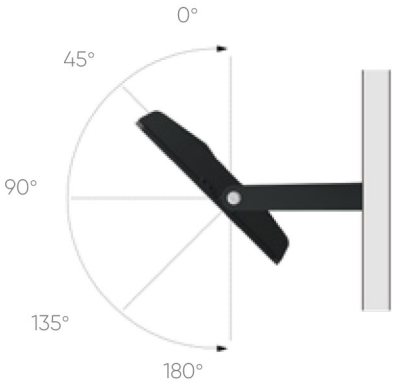

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	FL51
Power	50W, 100W, 150W, 200W, 300W
Efficacy	125lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.95
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
IP Rating	IP66
IK Rating	IK07
Mounting Option	Bracket Mounting
Warranty	5 Years
Surge Protection	4kV line-line, 6kV line-earth
Operating Temperature	-30°C to + 50°C

The product has been discontinued online. Please contact our sales representative for more information. The FL51 LED flood light is a DOB solution that has a full power range manufactured with several model sizes, as well as an ultra-slim and ultra-light design to boost the product's highest cost-effectiveness while still keeping a 5 years warranty. A honeycomb reflector is made with decreased light diffusion and less glare. Driver-on-Board, a practical and economic solution. Thin, incredibly light body, significantly reduces shipping costs. Integrated honeycomb reflector for a cozier visual experience. The vent prevents the inside from becoming foggy. Reserve large-size mounting hole, compatible with diversified applications. Applications: Recreational sports (tennis courts, basketball courts...), Exhibition Center, Shopping Mall, Parks and Gardens, Accent lighting, Parking lots.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4