

FL13 HIFLEX

Modular Designed Economical LED Flood Light

200W, 400W, 600W, 800W, 1200W

IP66 IK08 1-10V 10-20KV DALI DMX RDM

KIRITO

Structure

Good heat dissipation

Drivers were installed in external driver box, separated from LED module brings better air convection

Modular design

Easy for adjustment and maintenance

Double protection

Tempered glass protects the lens from yellowing and long lifespan



Adjustable bracket

Luminaire can be adjusted by 180°

Die casting heat sink

Compact housing by AkzoNobel powder coating with good anti-corrosion performance

Optic lens

Light transmittance up to 93%. 9 kinds of optics optional


Precise adjustment

Laser aiming device helps to hit the light to target area precisely



Light pollution control

Our HIFLEX with precise optical system that direct the lights onto the designated areas to reduce light loss. Besides, a visor can be added when needed.

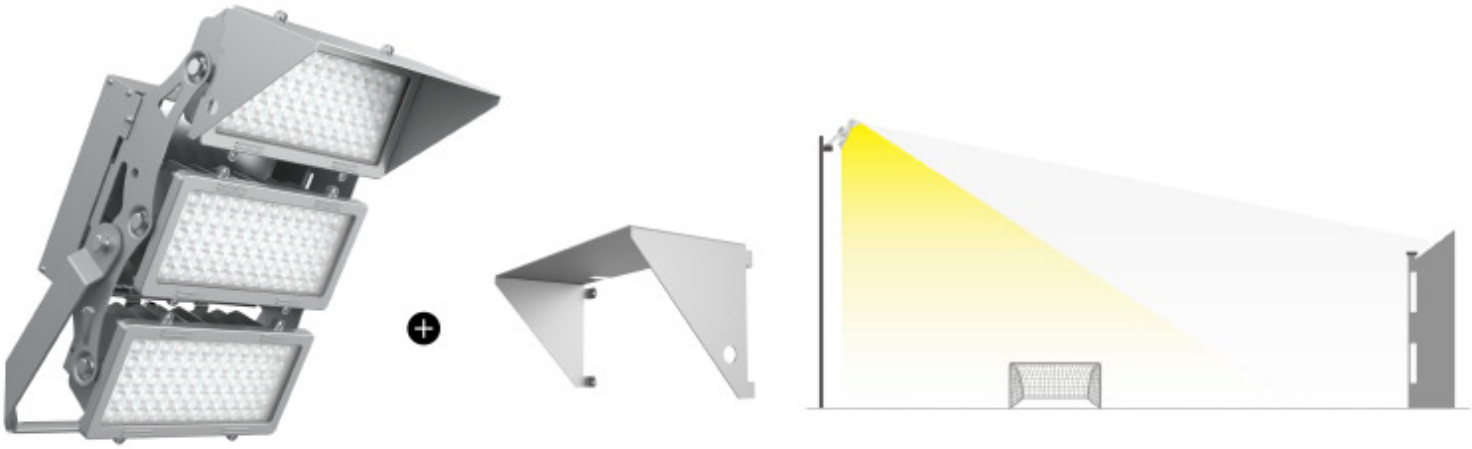

Cable protection

Bird-proof sleeve to better protect the exposed cables







HIFLEX Mounting

Easy installation and adjustment

Bent and angle adjustable bracket for quick installation and adjustment

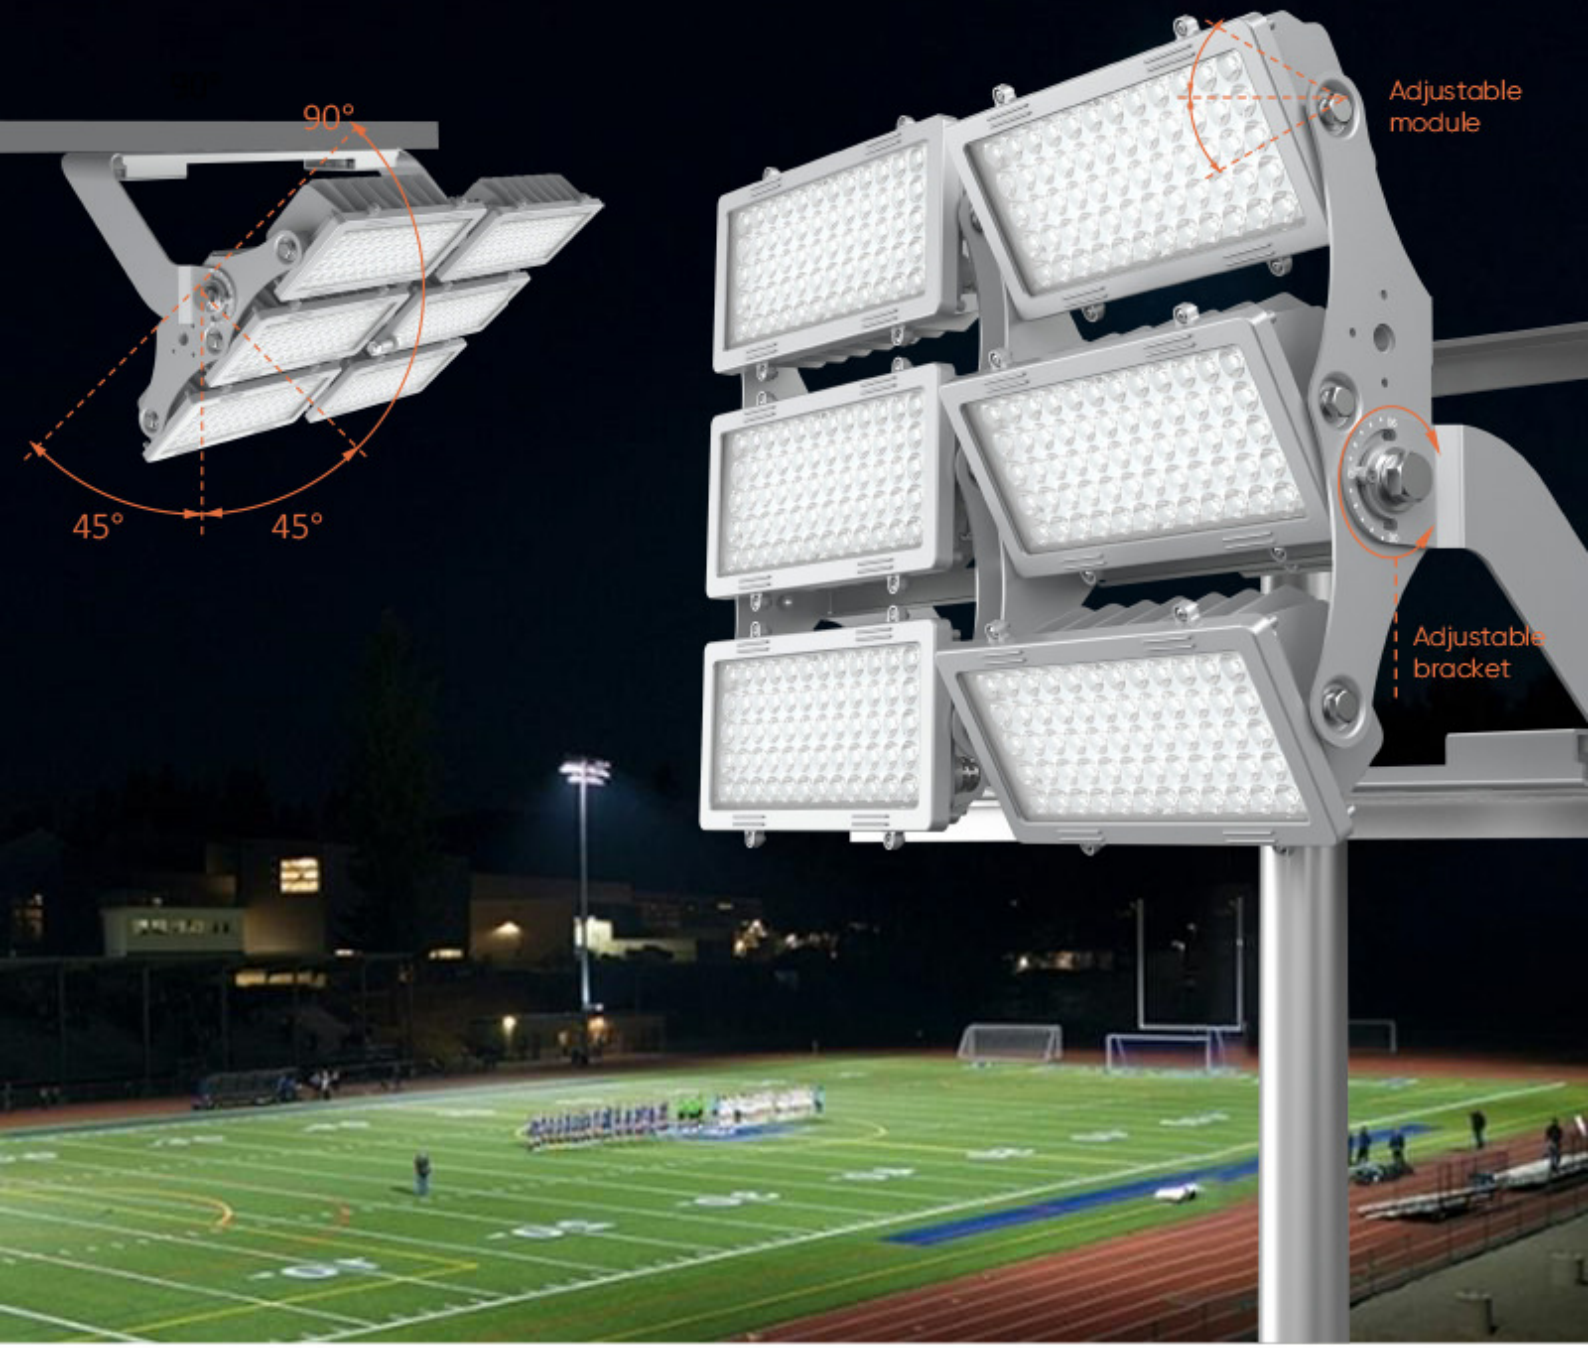

Mounting options of 800W and 1200W HIFLEX

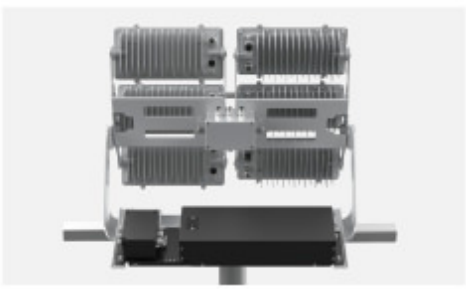

Driver box on bracket




Remote driver box on pole



Remote driver inside cabinet



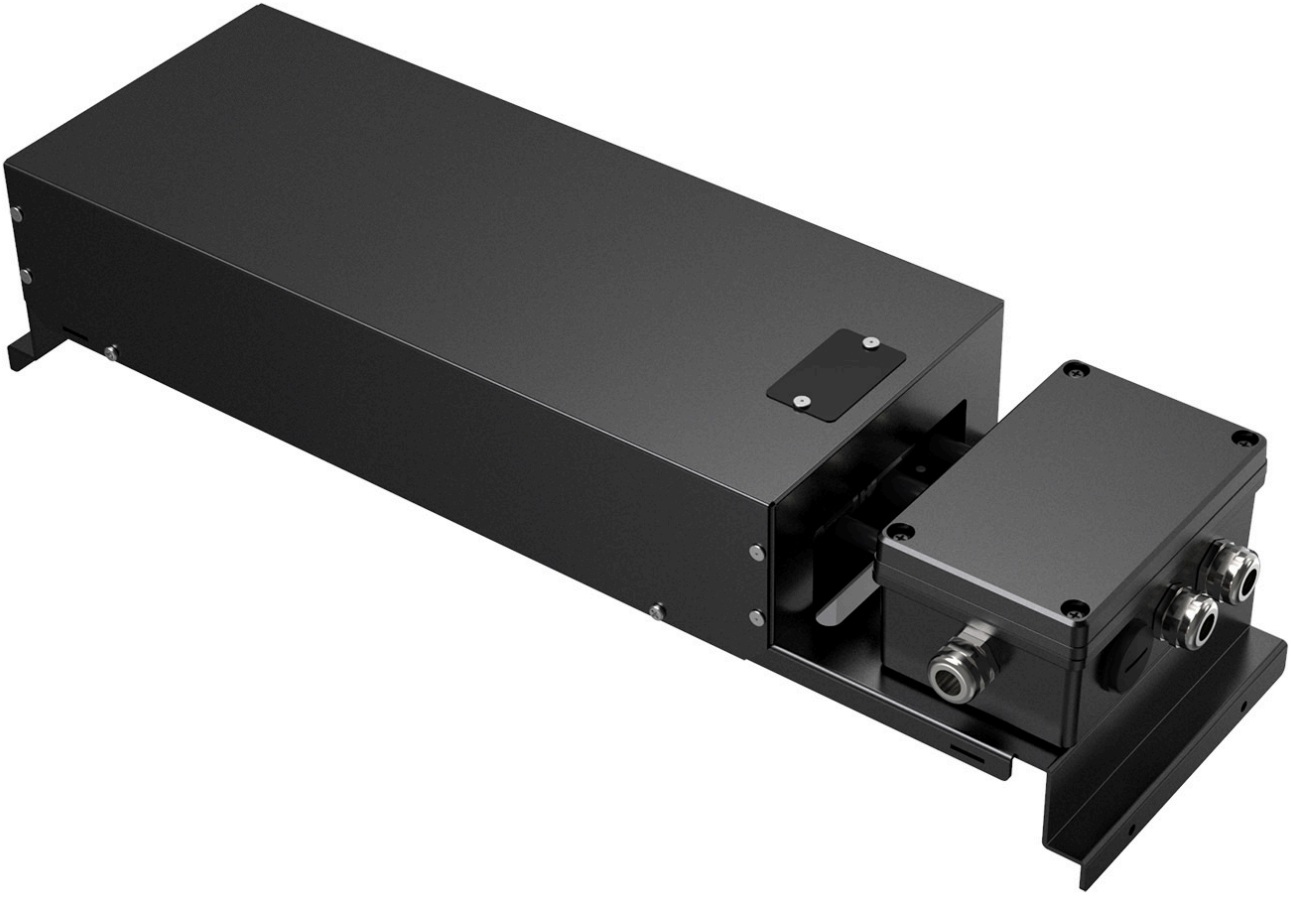


SAN GIUSTO
CAVANELLA
S. MARTINO
1966 FESTA dei RAGAZZI
50° ANNIVERSARIO


AGC lighting
www.agclat.com


AGC lighting
www.agcled.com

AGC lighting
www.agcled.com




AGC lighting
www.agcled.com


AGC lighting


AGC lighting
Steiermärkische
SPARKASSE
Zwesler


AGC lighting
AGC lighting


AGC lighting
AGC lighting


AGC lighting
AGC lighting


AGC lighting


AGC lighting
AGC lighting


AGC lighting
AGC lighting


AGC lighting
AGC lighting


HONDA
AGC lighting
AGC lighting
AGC lighting


AGC lighting
AGC lighting


AGC lighting

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	FL13
Power	200W, 400W, 600W, 800W, 1200W
Efficacy	125lm/W, 135lm/W, 140lm/W
Input Voltage	100-240 VAC, 100-277VAC, 277-480VAC, 50 / 60 Hz
Power Factor	>0.92
CCT	3000K, 4000K, 5000K, 5700K
CRI(Ra)	70, 80
Control	1-10V Dimmable, DALI, DMX
IP Rating	IP66
IK Rating	IK08
Mounting Option	Bracket Mounting
Warranty	5 Years
Surge Protection	6kV line-line, 10kV line-earth, 20KV
Operating Temperature	-30°C to + 40°C

The product has been discontinued online. Please contact our sales representative for more information. The most valuable and high-power flood light with full series from 200W to 1200W, ideal to retrofit the 400W to 3000W traditional lamps. The compact modular design gets a quick assembly and flexible installation. Easy to adjust the light angle and create the diversity of lighting environment. The compact design gets quick assembly and flexible installation. Modular design from 200W to 1200W. Ideal to retrofit the 400W to 3000W traditional fixture. Multiple optics lens optional 10°/ 15°/30°/45°/60° and asymmetric. 10-20kV surge protection. Applications Transportation Stadium & Arenas Street & Roadway Airport Seaport Soccer & Football Baseball/Softball Field

PRODUCT VIEWS



VIEW 1



VIEW 2




VIEW 3



VIEW 4


PRODUCT VIEWS

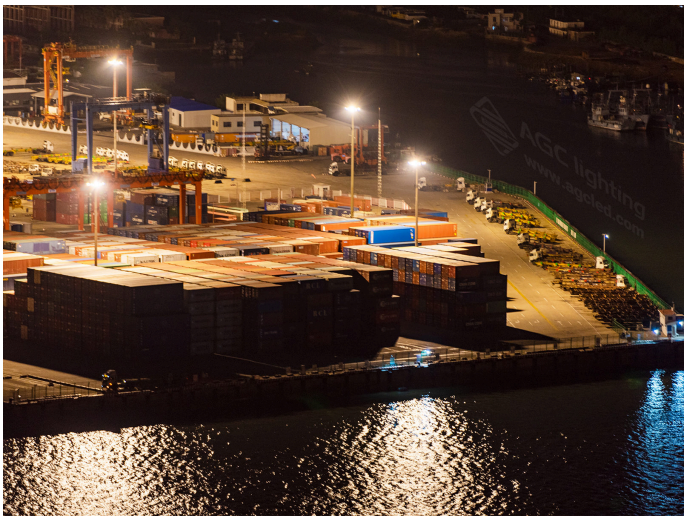

VIEW 5



VIEW 6

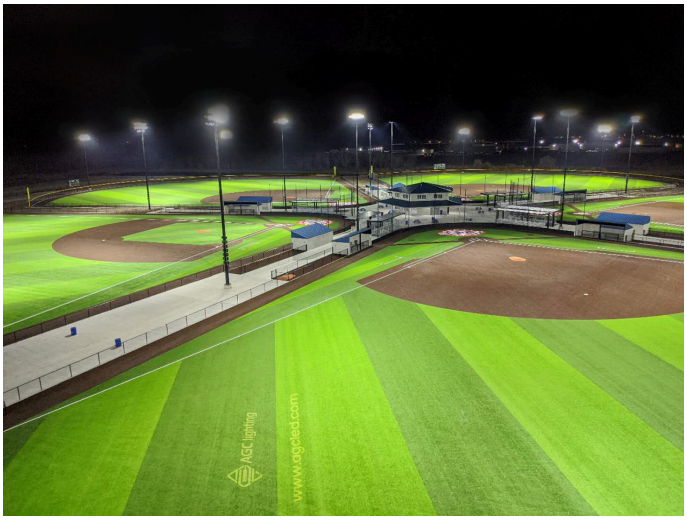


VIEW 7



VIEW 8

PRODUCT VIEWS

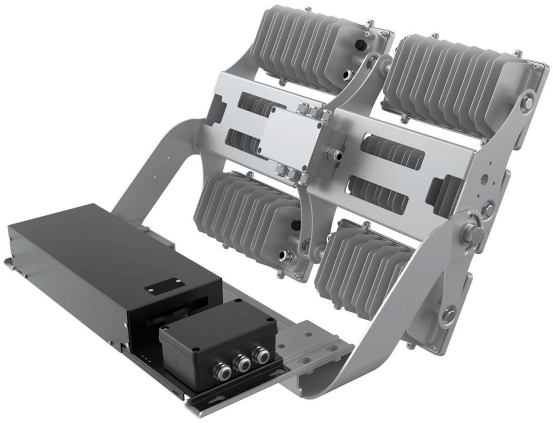

VIEW 9



VIEW 10



VIEW 11