AGC lighting



LHB32 Hein

Built-in rope brackets Linear high bay

Practical industrial luminaire focus on easy installation and maintenance

Built-in rope bracket

150 lm/w


Linkable

KIRITO

Surface mounted or suspended via the integrated bracket.

❶ Ceiling mount via keyholes

❷ The luminaire is equipped with integrated rope brackets that are folded up and clamped fixed on the line

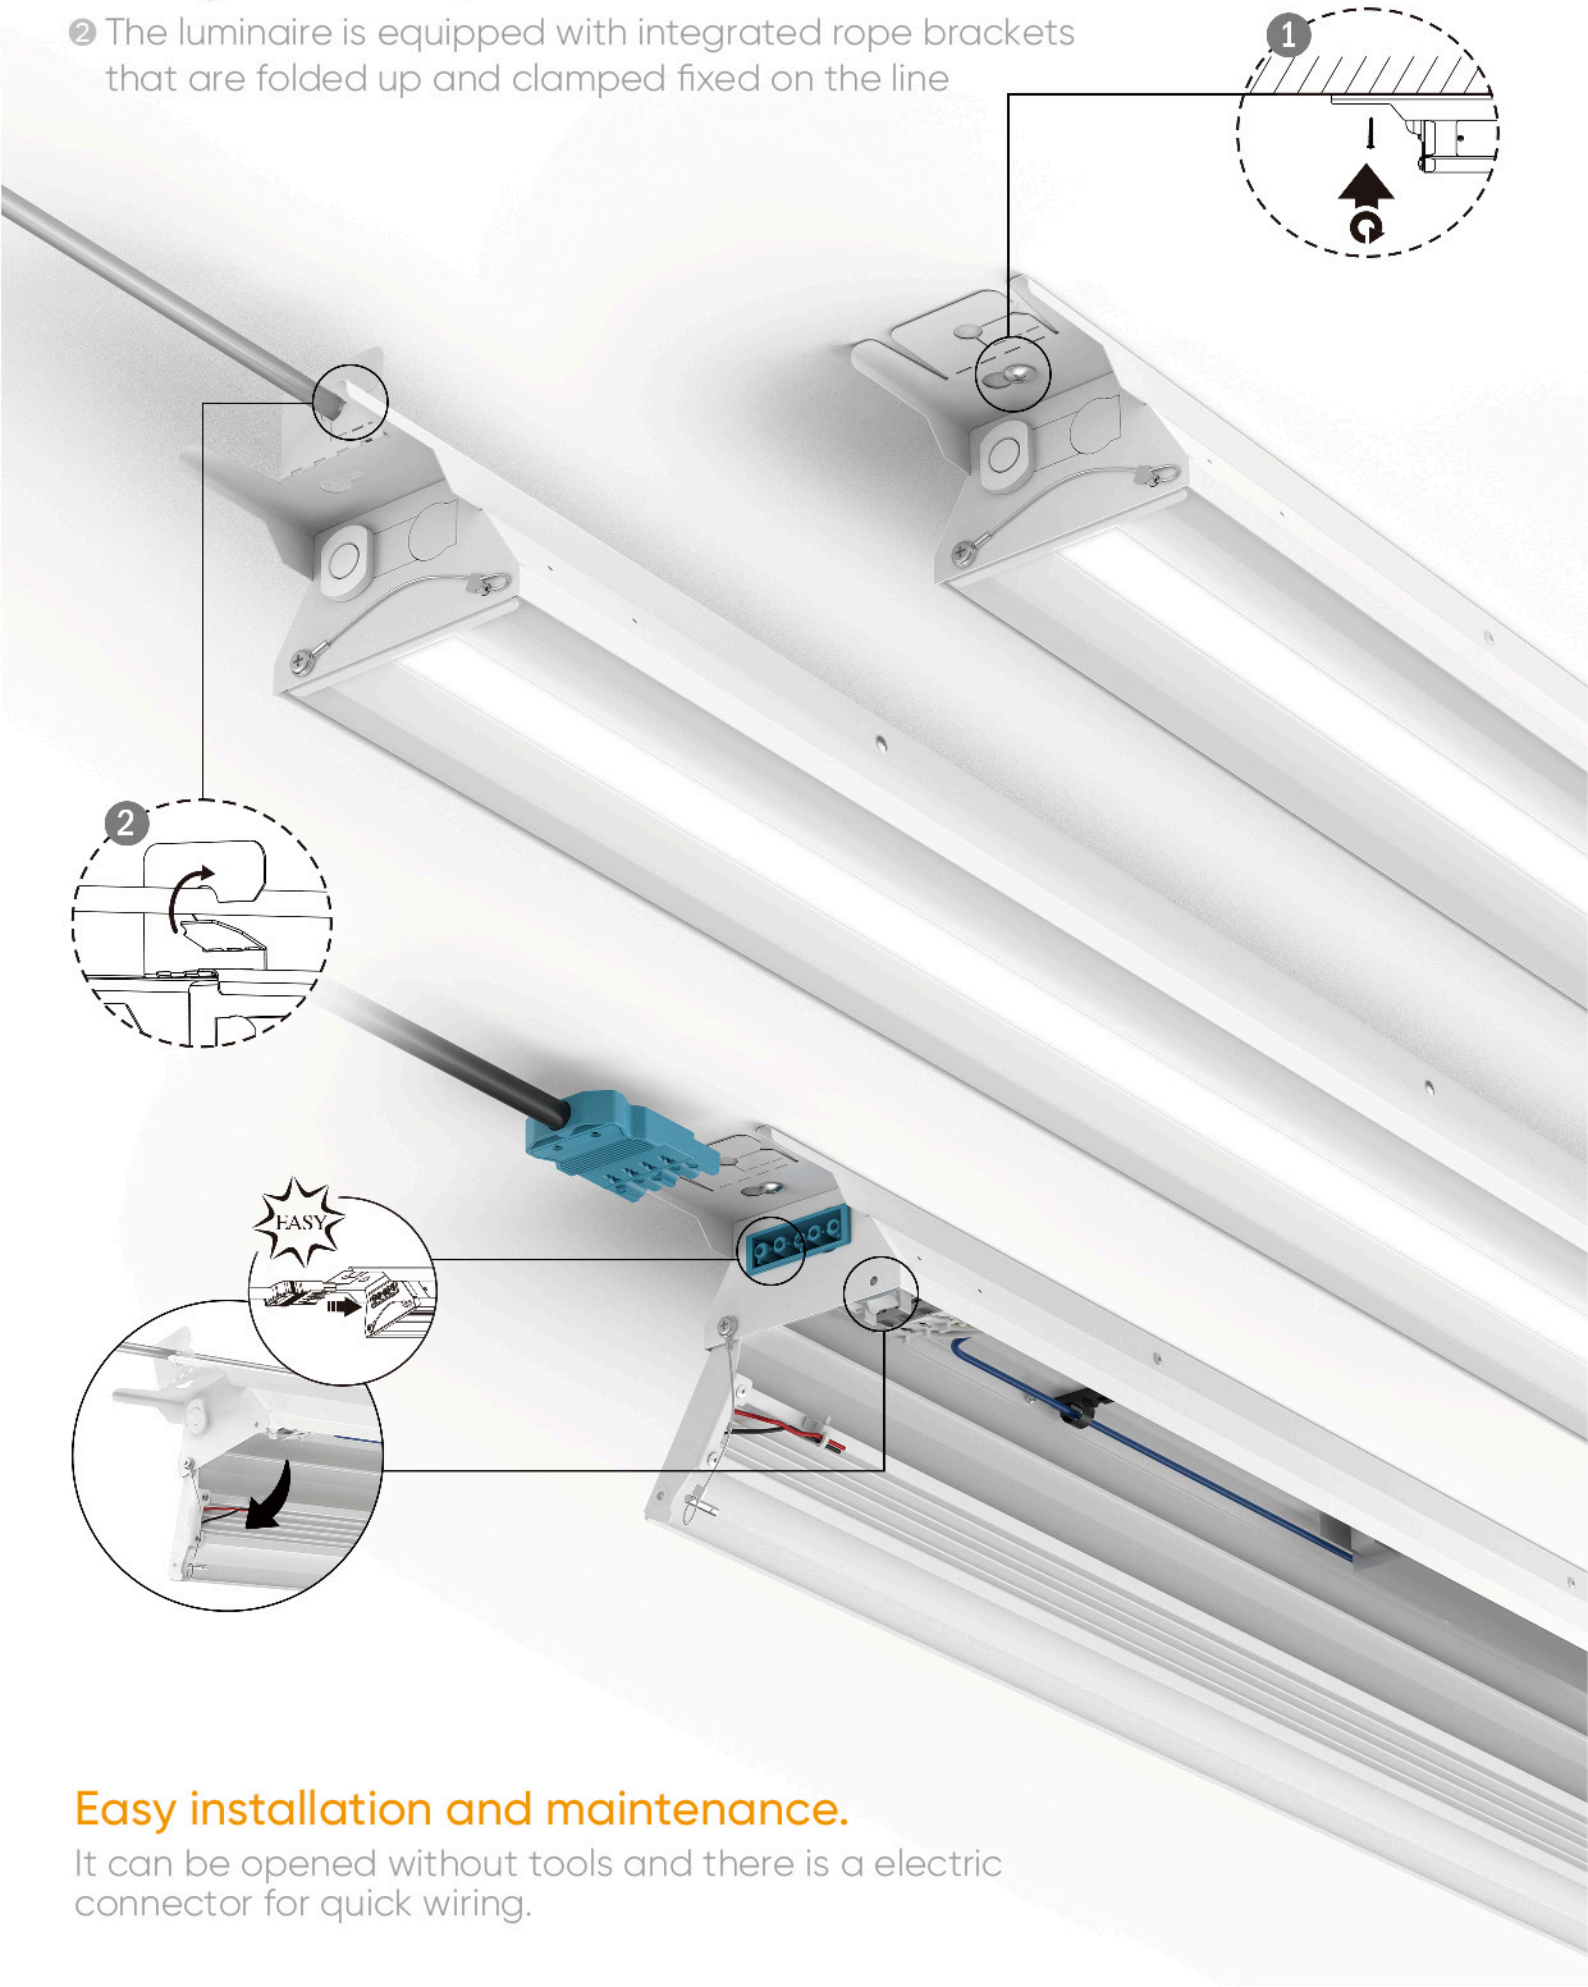

Easy installation and maintenance.

It can be opened without tools and there is a electric connector for quick wiring.



LEDiL lens and multiple optics

LEDiL optics perfecting light for the luminous.



40*100° 65*100° 75*100° 90*100° 2T25° T25° 110*100° 150*100°

Various intelligent control



Dali	0-10V dimming	Microwave sensor	PIR sensor	Emergency backup available

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	LHB32
Power	40W, 60W, 75W
Efficacy	140lm/W, 150lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K
CRI(Ra)	80
Control	DALI, Dimmable, Microwave Sensor, PIR Sensor, Emergency
IP Rating	IP20, IP33
Mounting Option	Surface, Suspended
Warranty	5 Years
Surge Protection	1kV line-line, 1kV line-earth
Operating Temperature	-30°C to + 45°C

The product has been discontinued online. Please contact our sales representative for more information. It is designed under the concept of practicality, focus on easy installation and maintenance, the luminaire has built-in rope brackets making it highly flexible, multiple optics for different applications. Easy installation and maintenance; tool-free access to open driver chamber; quick connectors to connect the lamps. Built-in rope bracket. LEDiL lens with multiple optics choices. Minimal packaging. Linkable. Various intelligent controls. Applications: For factory workshops, warehouses, large offices, recreational sports like tennis courts, basketball courts.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4