


LHB31 Carlite

Low UGR linear light

Workplace lighting suitable for precision assembly

135 lm/w | IP50 | Low Glare | DALI 2.0


KIRITO

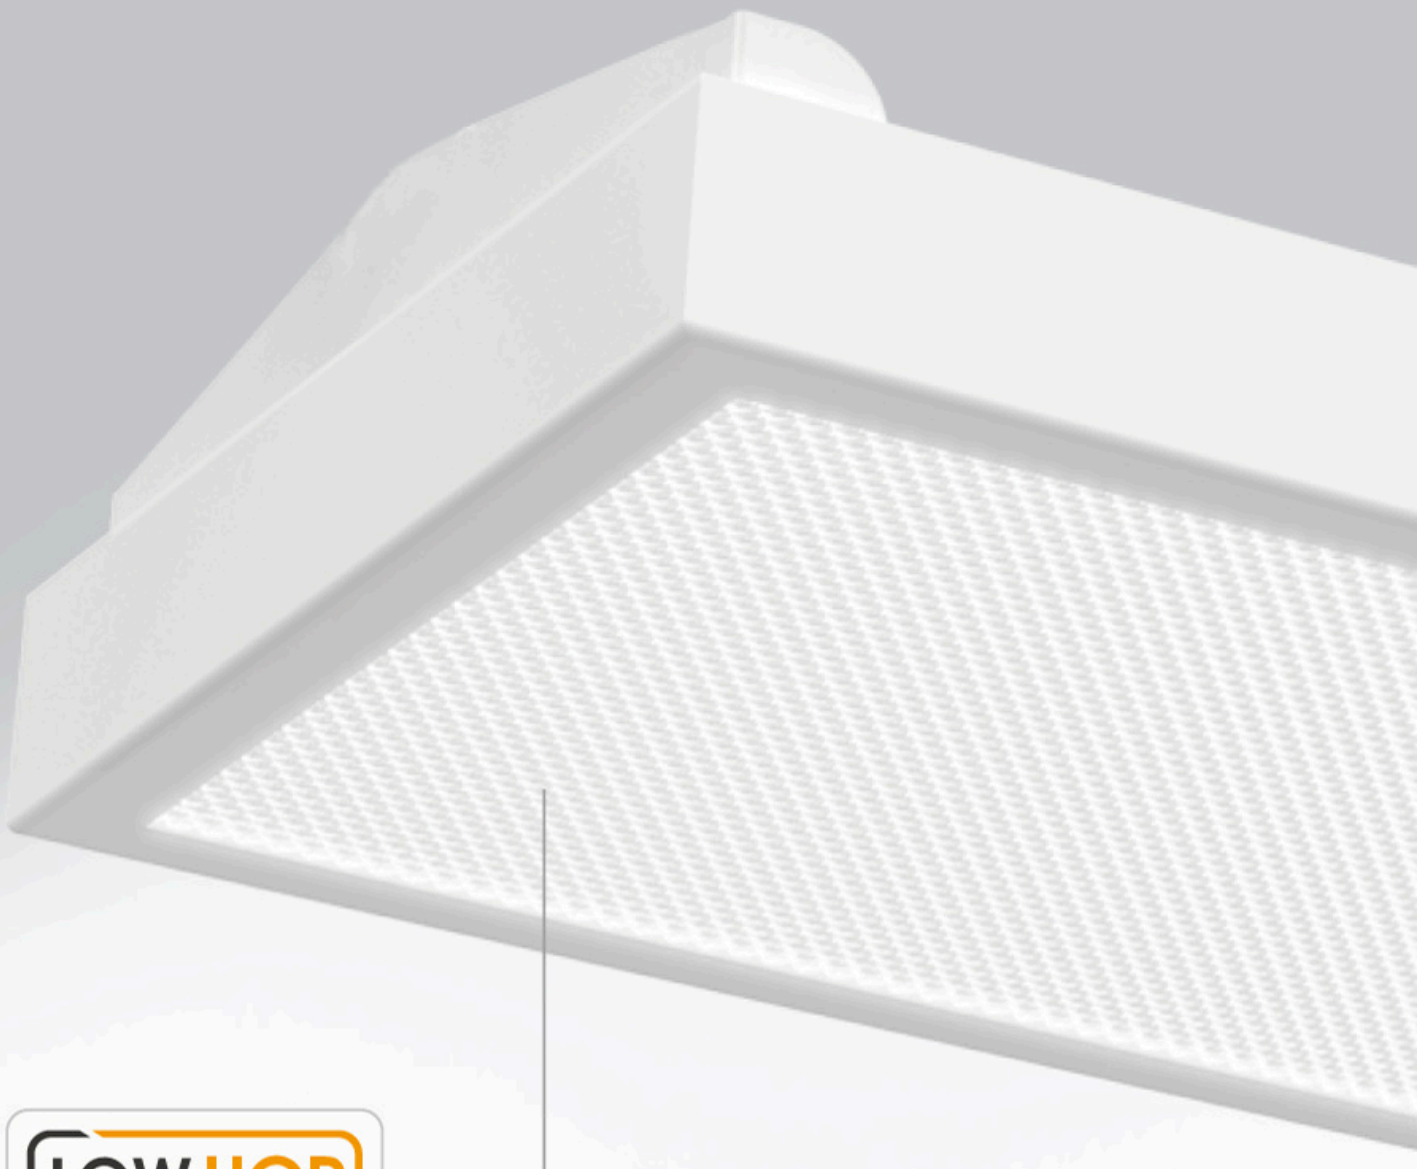

LOW UGR


UGR19

With the large light-emitting surface and anti-dazzle PMMA diffuser, the fixture delivers high uniformity light and excellent performance of low glare(around UGR19)

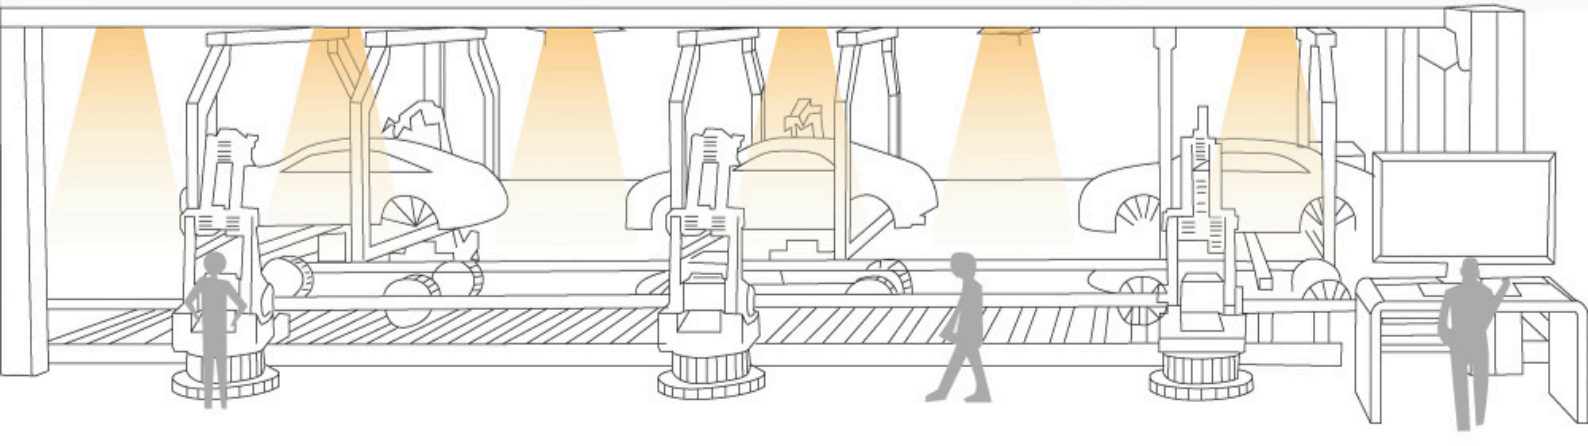


Easy to install

±45° ajustable bracket mount, high flexibility, easy installation

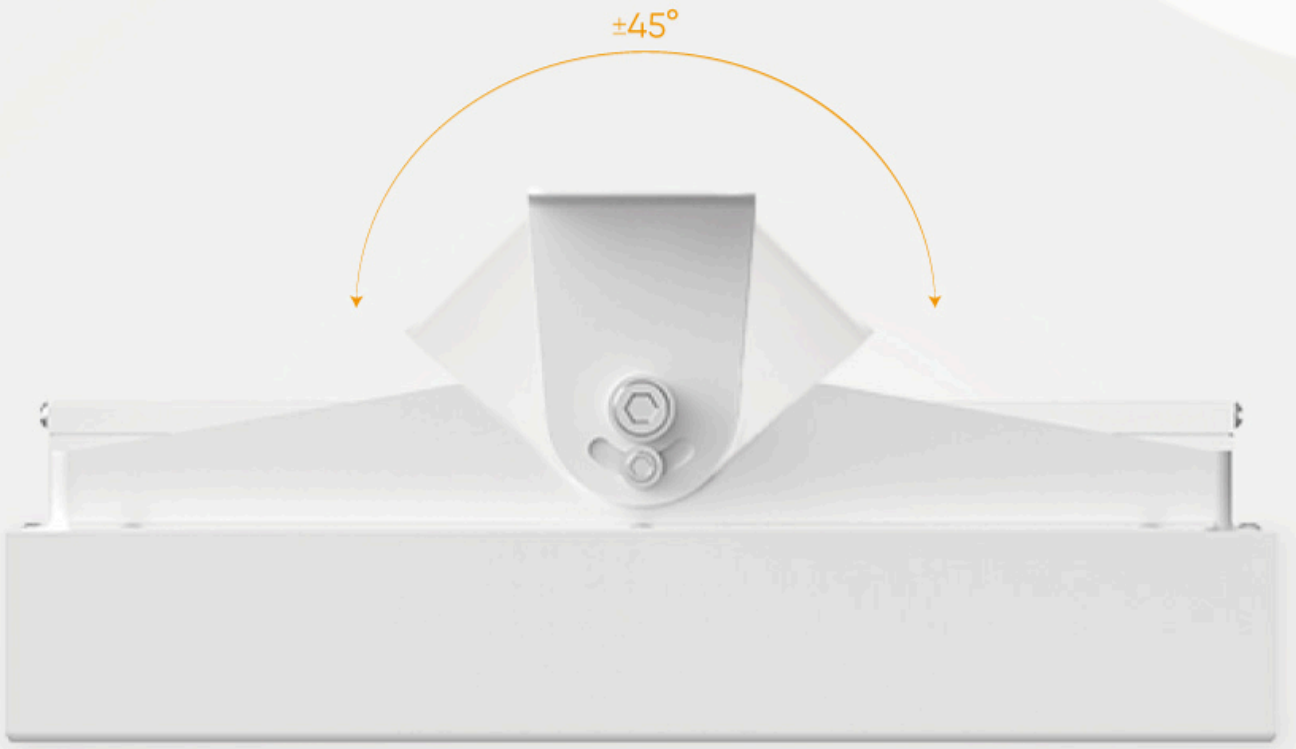

Easy to maintain

The driver is installed in the driver box on the back of the lamp, which is convenient for maintenance

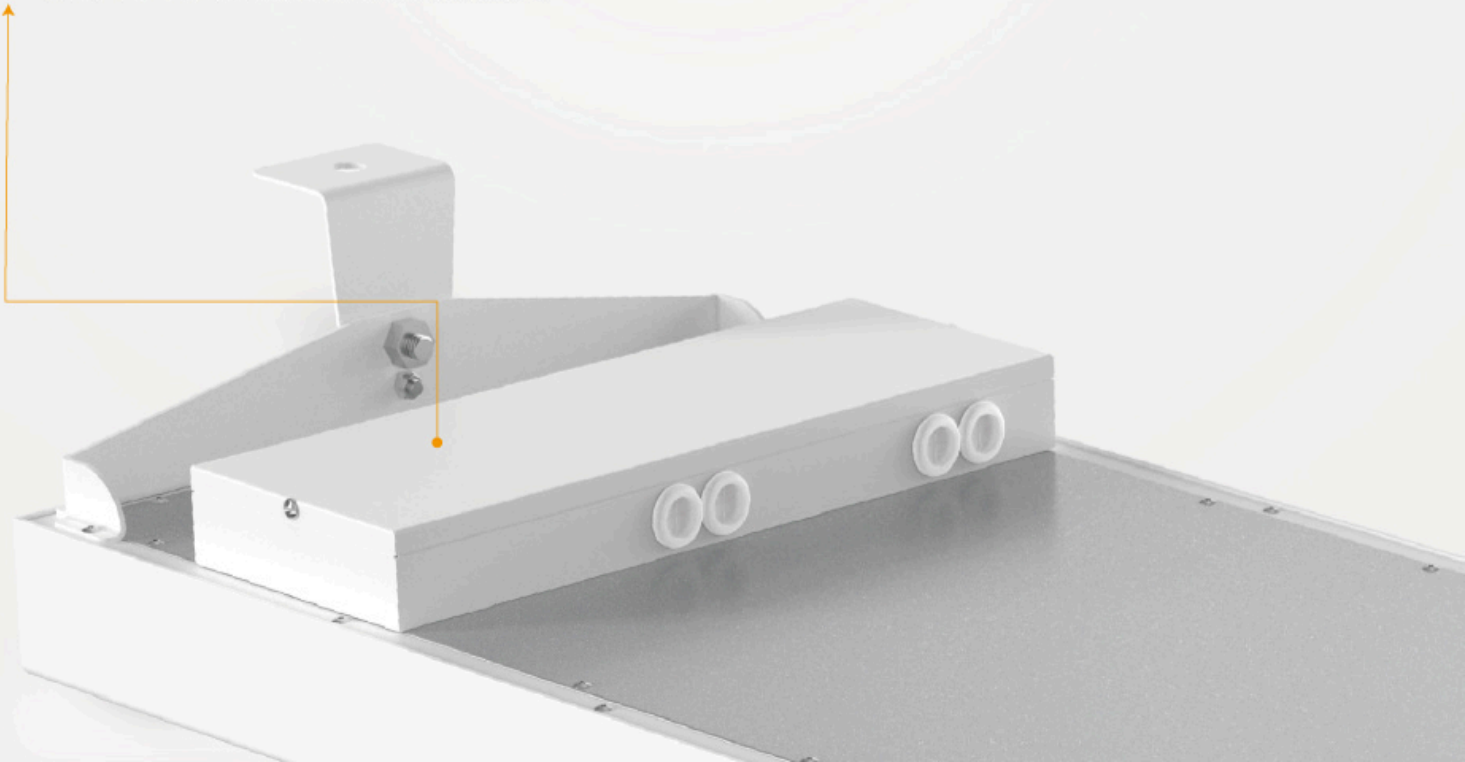

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	LHB31
Power	40W
Efficacy	135lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
UGR Level	19
CCT	3000K, 4000K, 5000K
CRI(Ra)	80
Control	DALI
IP Rating	IP50
Mounting Option	Ceiling Mounting
Warranty	5 Years
Surge Protection	1kV line-line, 2kV line-earth
Operating Temperature	-30°C to + 50°C

The product has been discontinued online. Please contact our sales representative for more information. LHB31 LED linear high bay is a robust luminaire made of aluminum alloy for areas of application in the automotive industry (production line lighting). Due to its high level of glare control, this light is also suitable for workplace lighting such as precision assembly. With the large light-emitting surface and anti-dazzle PMMA diffuser, the fixture delivers high uniformity light and an excellent performance of low glare (UGR19 around) ±45° adjustable bracket mount, highly flexible, easy installation The driver is installed in the driver box on the back of the lamp, which is convenient for maintenance Applications: For the automotive industry, precision assembly factories, big workshops, warehouses, large offices, supermarkets, etc

PRODUCT VIEWS




VIEW 1



VIEW 2



VIEW 3

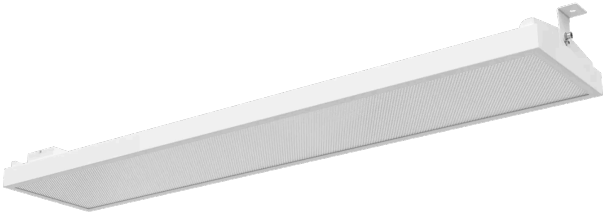

VIEW 4