KIRITO



WP15 Celestial

Versatile Nordic Wall Pack

Ideal for hotel lobby, corridor and auditoriums to entryways, conference rooms and building facades.

IP66

IK08

CCT Selectable

Power Selectable

Photocell sensor

Emergency backup avaliable

Simplicity and Modernity Design

Special wall-hugging design for a seamless fit. Crafted with die-cast aluminum and treated glass to prevent dust and water buildup.



Loop-in and Loop-out Wiring

Experience flexible installation with loop-in and loop-out wiring. Upgrade your lighting setup effortlessly.





Up and Down Lighting

Light emitted from one or both sides, up and down.



Down Light 20W
15°



Up Light 10W and Down Light 10W
30°



Up Light 20W and Down Light 20W
60°


Various Optical Angles

Narrow symmetrical optic 15°/30°/60°, illuminate your space with style and create a comforting visual ambiance.



CCT Selectable

2700K - 3000K - 4000K CCT switchable assures you of proper light color in various applications.

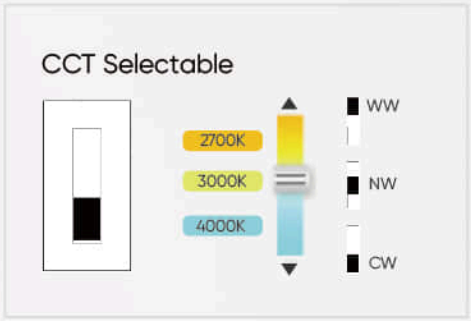

Power Selectable

Five adjustable power settings for ultimate flexibility.
20W(20/17/15/12/10), 40W(40/36/30/25/20).



Photocell Optional





ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	WP15
Power	20W, 40W
Efficacy	120lm/W, 130lm/W
Input Voltage	100-240 VAC, 50 / 60 Hz
Power Factor	>0.97
CCT	2700K, 3000K, 4000K
CRI(Ra)	70, 80, 90
Control	Power adjustable
IP Rating	IP66
IK Rating	IK08
Mounting Option	Wall mounting
Warranty	5 Years
Surge Protection	6kV line-line, 10kV line-earth

WP15 is a small wattage & economical wall light developed to meet the market demand of customers with up and down light output, adjustable color temperature + adjustable power. It is equipped with die-cast aluminum and specially processed safety glass, which can prevent dust and water from accumulating on the light, IP66 waterproof rating. With the combination of glass + lens, the appearance is neat and generous; small and exquisite, and low-power green lighting can also decorate the environment. As a direct/indirect wall light, WP15 will be a perfect balance of decorative and functional forms. Efficacy: 130lm/W Down light and Up & Down light optional Beam angle: 15°, 30°, 60° optional Power adjustable 3CCT adjustable Fixture color: Anthracite grey(RAL7016) Applications: Building exteriors, Hotal lobby, Conference rooms, Corridor and auditoriums to entryways

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5