Meet food safety requirement design

Smooth housing without fins , easy to clean by water
No front glass and exposed screws, without risk of falling the parts.





High Reliability IK10, IP66 and IP69K

IP69K protection against high pressure water and high temperature steam make products can be used in conditions where equipment must be carefully sanitized.

1	Test Standard	ISO 20653:2013
2	Turntable speed	(5±1) r/min
3	Spray positions	Spray at 0°, 30°, 60°,90°
4	Water flow rate	(15±1) r/min

5	Test Time	30s per position
6	Water pressure	About 8000-10000KPa
7	Water temperature	(80±5) ℃ (176°F)
8	Distance	100mm~150mm



IK TEST



IP6X TEST





IP6X TEST

KIRITO

Power and CCT adjustable as flexible inventory

100%, 75%, 50%, 30% power adjustable , 2 or 3 CCT adjustable, all functions can be combined in one lighting fixture.

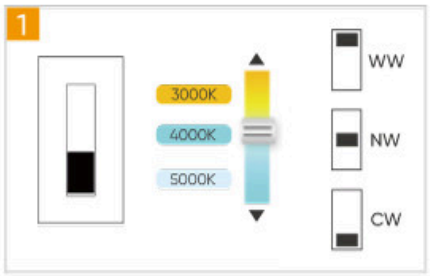


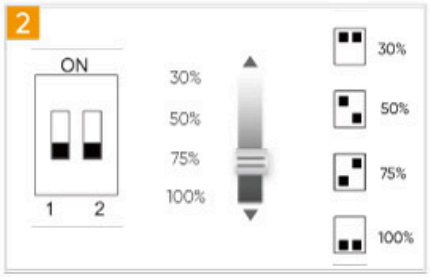



One SKU meet different projects demands to do project in quick action, saving a lot warehouse space.


Elimination of dead stock Less blockage of funds Save storage space

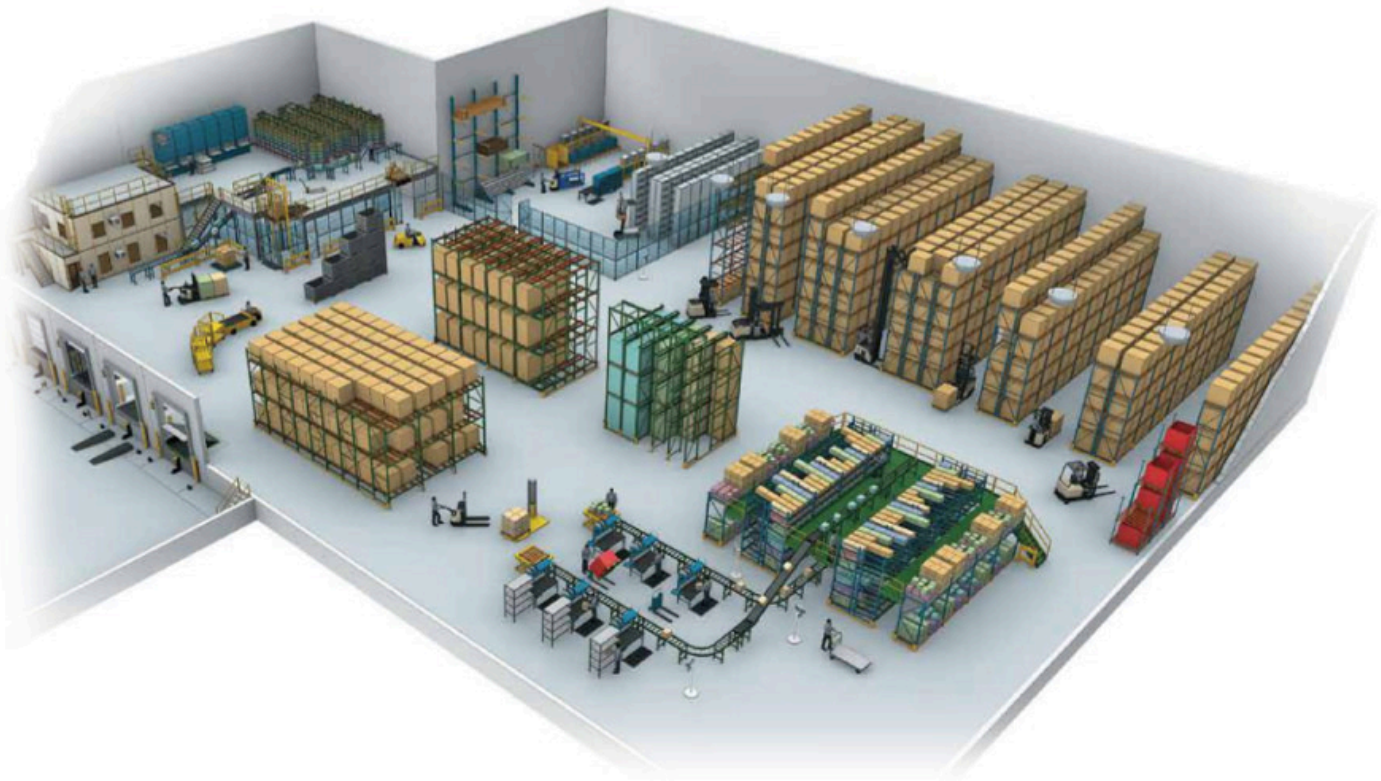








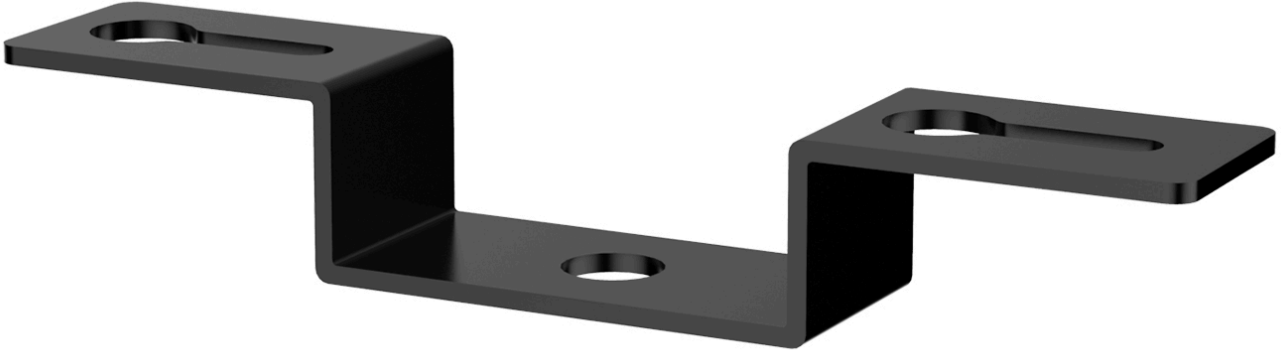

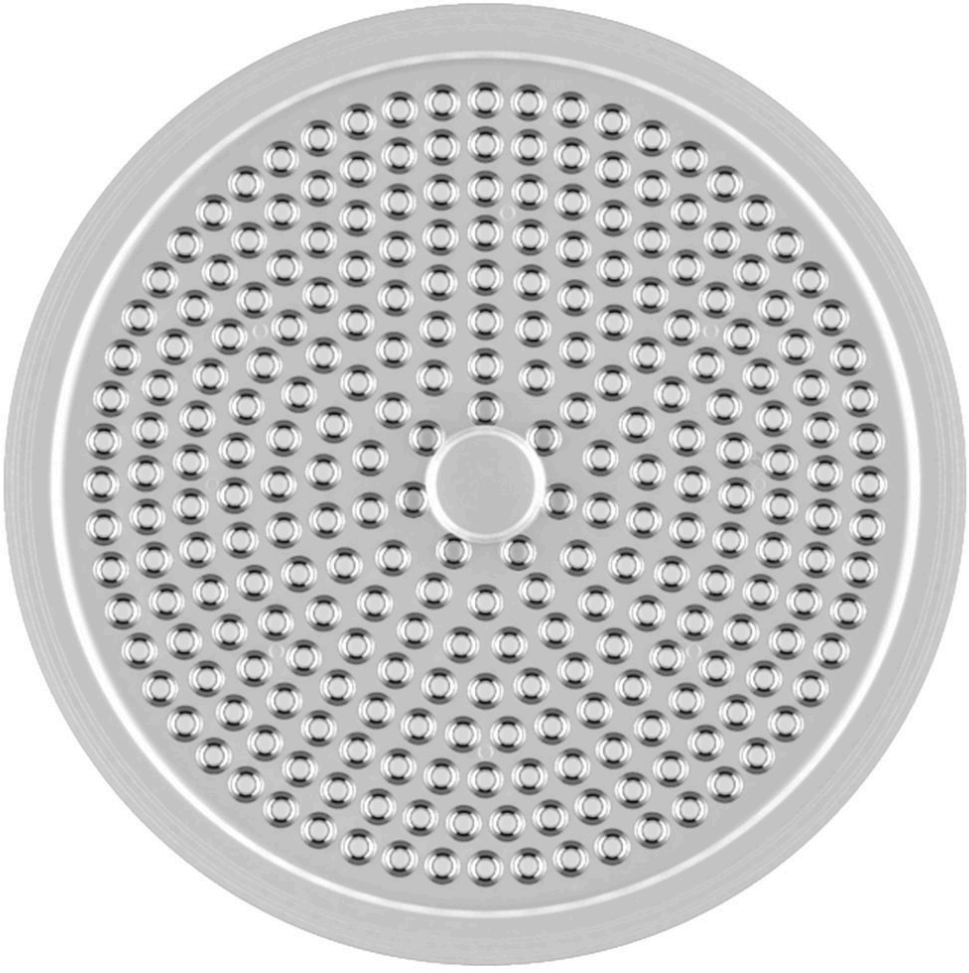


KONECRANES
AGC lighting


AGC lighting
www.agclet.com


KOMATSU
AGC lighting
www.agcled.com



AGC lighting
AGC lighting

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	HB06
Power	100W, 120W, 150W, 200W
Efficacy	150lm/W, 155lm/W
Input Voltage	120-277Vac, 50 / 60 Hz
Power Factor	>0.95
UGR Level	26
CCT	5000K, 4000K, 3000K
CRI(Ra)	80, 70
Control	Dimmable, DALI, Daylight Sensor, Microwave Sensor, PIR Sensor, ZigBee Control, Wireless
IP Rating	IP66
IK Rating	IK08, IK10
Mounting Option	Loop Hanging, Ceiling Mounting, Pipe Mounting
Warranty	5 Years
Surge Protection	6kV line-line, 10kV line-earth
Operating Temperature	-30°C to + 50°C

Winner of the Red Dot Award, HiClean Plus is a breakthrough design in industrial lighting. The smooth housing is combined with aesthetic taste and dust-proof features. On the basis of a highly efficient heat dissipation solution, our design concept is "UNIBODY", which leads the way in high bay lights. Food Processing: NSF & IP66/IP69K & No Toxic chemicals & Smooth outline & Non-exposed stainless steel screws & No glass & Anti UV... etc. UGR<19 with honeycomb diffuser available. Full certificates: CE, ROHS, UL, DLC, SAA, EMC, LM79, D-mark, NSF Applications Agricultural Shed Food Processing

PRODUCT VIEWS

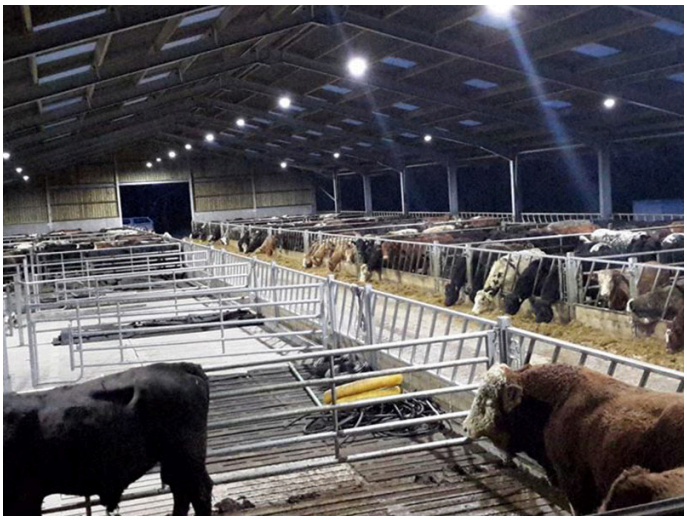

VIEW 1



VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5



VIEW 6