
Contemporary Aesthetic Design

Sleek, geometric design can complement any modern urban landscape.




High Efficient

Equipped with 5050 LEDs, it achieves up to 140 lm/W, making it more energy-efficient.

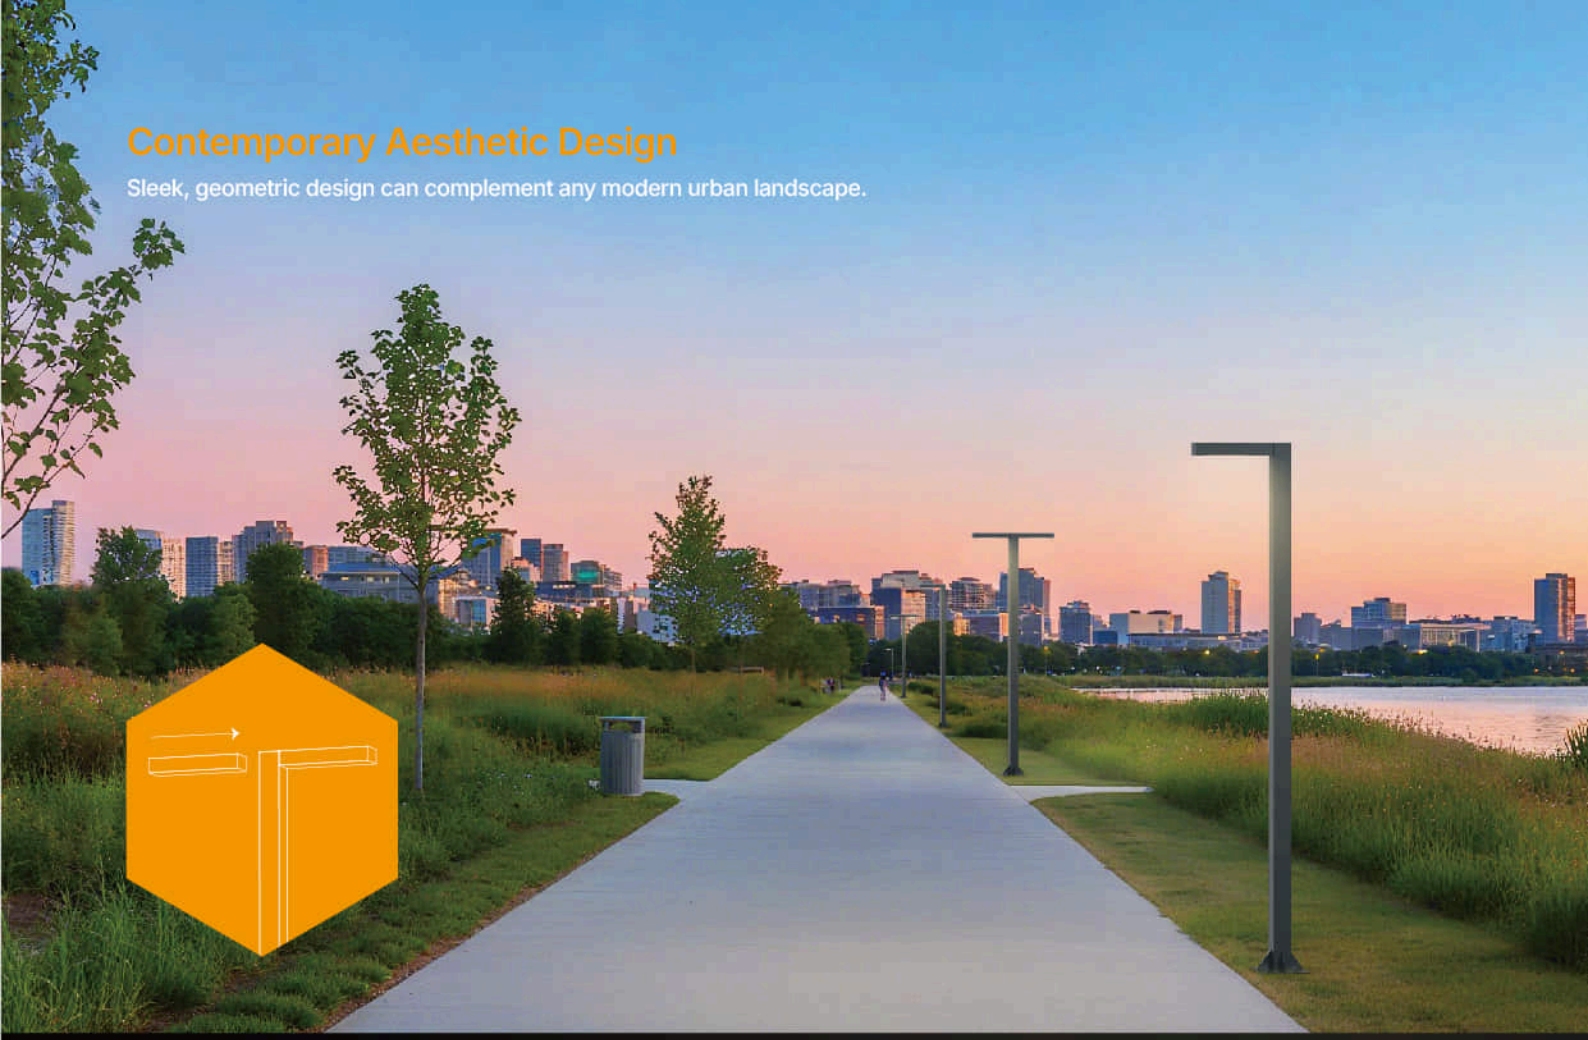

5050 LEDs


Up to 140 lm/W

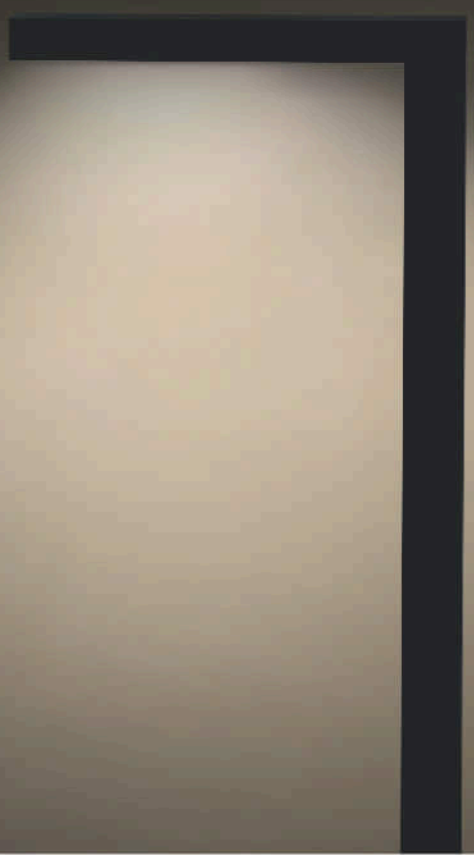


KIRITO


Professional Optics

Optional Type 2, Type 3, Type 4, and Type 5 optics can meet the diversified needs of different scenarios.

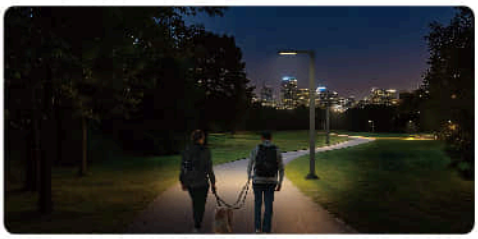


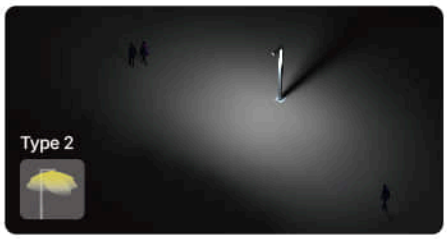





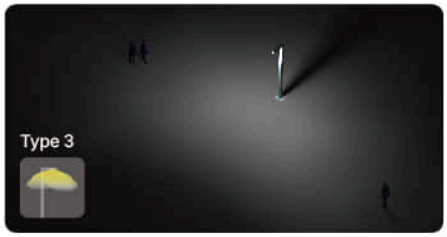



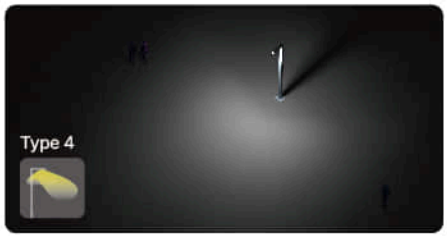

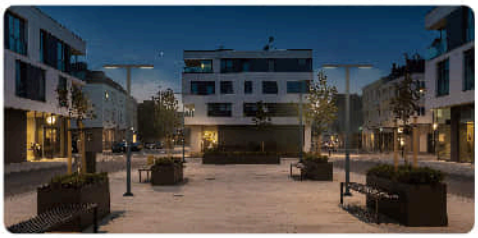

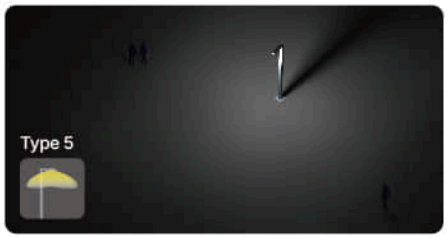

Smart Energy Management

Equipped with adaptive smart controls (e.g., Zhaga book 18 receptacle, DALI dimming), PT10 optimizes energy use by adjusting output based on real-time needs, ensuring no excess usage.





ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	PT10
Power	30W, 50W, 75W, 100W, 120W
Efficacy	140lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K
CRI(Ra)	70, 80
Control	0-10V ZHAGA
Corrosion Class	C3
Class Electrical Equipment	Class I
IP Rating	IP66
IK Rating	IK08
Mounting Option	Post Top
Warranty	5 Years
Surge Protection	10kV line-line, 10kV line-earth
Operating Temperature	-30°C to + 50°C

LumaEdge features a sleek, geometric design that seamlessly complements modern urban landscapes. It offers optional professional optics (Type II, Type III, Type IV, and Type V) to meet the diverse requirements of various applications. With IP66 and IK08 ratings, LumaEdge is built to endure outdoor environments. It supports on/off control, DALI dimming, and Zhaga socket integration, enabling intelligent lighting management and energy savings by adjusting output in response to real-time conditions.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4