LHB11 LED TRI PROOF LIGHT



Water-proof

Dust-proof

Corrosion-proof

LUMEN PACKAGE

6000lm / 9000lm / 12800lm

LHB11 COMES IN THREE SIZES



600MM/40W

1200MM/60W

1500MM/80W

ALUMINUM6063

Excellent heat dissipation performance




PC COVER

PC cover with IK08

CAN BE LINKABLE

Max. 10-12no. fittings per daisy-chain

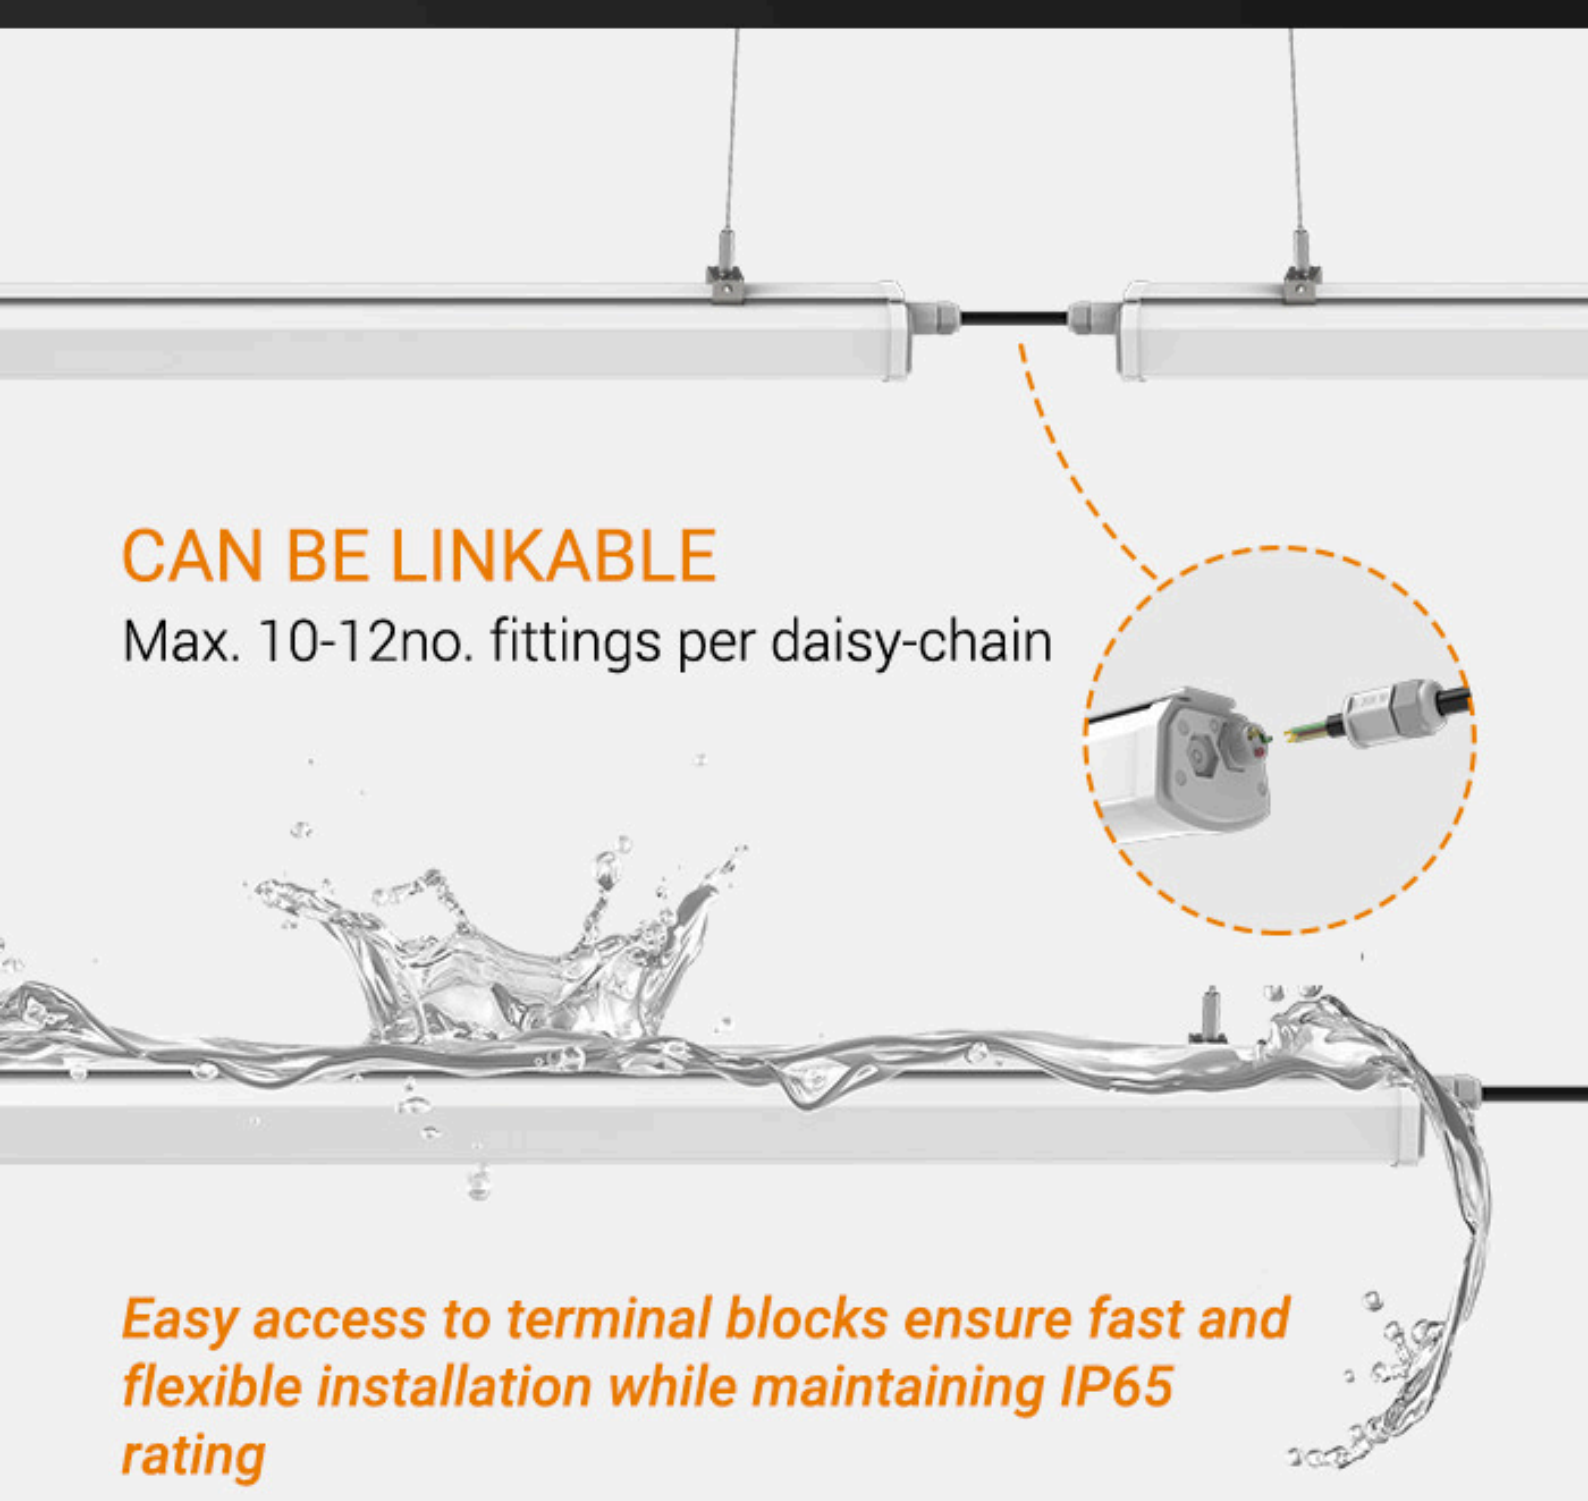

Easy access to terminal blocks ensure fast and flexible installation while maintaining IP65 rating

MOUNTING OPTIONS



Suspended mounted



Ceiling mounted

CONTROLS



1-10V dimmable

DALI

Zigbee


Emergency

PIR Sensor

Microwave sensor

APPLICATIONS



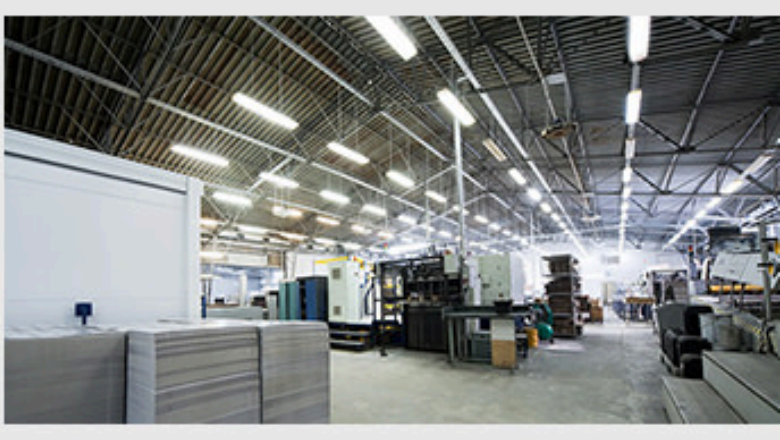





High output, utility aluminum linear fittings for 4m-8m high application in commercial & industrial areas,including warehouse, production workshop, parking areas, train stations etc.

KIRITO

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	LHB11
Power	40W, 60W, 80W
Efficacy	145lm/W, 150lm/W, 160lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K, 6500K
CRI(Ra)	80, 70
Control	DALI, ZigBee Control, Wireless, Emergency, Microwave Sensor, Daylight Sensor, PIR Sensor, 1-10V Dimmable, Non-Dimmable, Dimmable
IP Rating	IP65
IK Rating	IK08
Mounting Option	Wire Suspension, Ceiling Mounting
Warranty	5 Years
Surge Protection	1kV line-line, 2kV line-earth
Operating Temperature	-30°C to + 40°C

HiProof is designed with a rather robust lamp body but very reasonable cost. As a high standard tri-proof lamp, HiProof has full lamp IK08 & IP65 high degree protection. It has super high lumen efficiency of 150-160lm/W. HiProof is designed for long life usage with less maintenance and great performance. Versatile HiProof also has so many intelligent options, including daylight harvesting, microwave sensor, PIR sensor, DALI, Zigbee control Emergency backpack, etc. No exposed screw and a very smooth whole PC cover make it with self-cleaning feature ALU 6063 heat sink makes HiProof high worthy, robust, and supports good enough heat dissipation Whole PC material with anti-UV function makes it durable when used Fast connection design makes it easy to install Super high lumen output makes it highly energy-saving Multiple intelligent controls make HiProof suitable for more applications Non-linkable or linkable, ceiling mounting or suspending, all are available as demands Applications Parking Garage Airport

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5



VIEW 6