SP60 300W/500W



LuminaFlex is designed for indoor sports venues, air domes, swimming pools, exhibition halls, and airports where high-quality, comfortable lighting is required.
Direct lighting can produce harsh glare that interferes with player vision and creates significant safety risks in aquatic environments like swimming pools. LuminaFlex is engineered to provide a safer and more comfortable alternative.
The fixture features a 180° adjustable module that enables effective indirect lighting and precise multi-angle positioning. Specialized glass treatment minimizes glare and eliminates yellow spots, while an optional visor further improves visual comfort.
To meet diverse project requirements, the system offers three-level power adjustment and DALI control versions.
Engineered for long-term reliability, the LuminaFlex has passed a 1,000-hour salt spray test and carries a C4 anti-corrosion rating, ensuring stable performance in high-humidity environments.

ADDITIONAL PRODUCT SPECIFICATIONS


Series Code	SP60
Power	300W, 500W, 600W
Efficacy	140lm/W, 155lm/W
Input Voltage	220-240Vac, 50/60Hz, 50 / 60 Hz
Power Factor	>0.90
CCT	5000K
CRI(Ra)	80
Control	ON/OFF, DALI D4i
Corrosion Class	C4
IP Rating	IP65
IK Rating	IK08
Mounting Option	Wire Suspension, Ceiling Mounting, 3/4 NPT, Bracket Mounting
Warranty	5 Years
Operating Temperature	-30°C to + 50°C

LuminaFlex is designed for indoor sports venues, air domes, swimming pools, exhibition halls, and airports where high-quality, comfortable lighting is required. Direct lighting can produce harsh glare that interferes with player vision and creates significant safety risks in aquatic environments like swimming pools. LuminaFlex is engineered to provide a safer and more comfortable alternative. The fixture features a 180° adjustable module that enables effective indirect lighting and precise multi-angle positioning. Specialized glass treatment minimizes glare and eliminates yellow spots, while an optional visor further improves visual comfort. To meet diverse project requirements, the system offers three-level power adjustment and DALI control versions. Engineered for long-term reliability, the LuminaFlex has passed a 1,000-hour salt spray test and carries a C4 anti-corrosion rating, ensuring stable performance in high-humidity environments.

PRODUCT VIEWS



VIEW 1

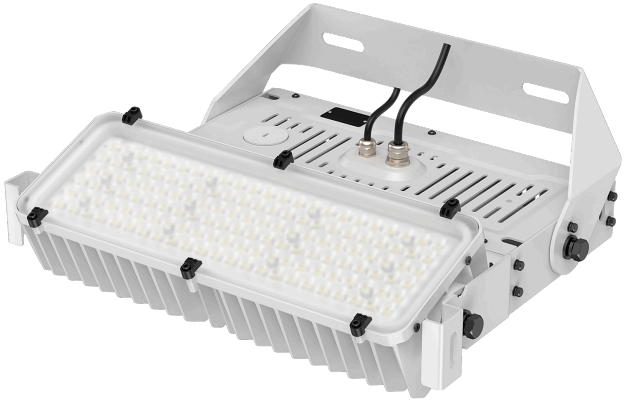

VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5