

WP07

LED Cylinder Wall Light

Applications for hotel lobby, corridor and auditoriums to entryways, building facades and awnings

10W/20W/30W

120 lm/w

IP66

IK08

KIRITO

Wall luminaire
Light emission from one side or two sides up and down






Up lighting


Up and down lighting

Down lighting

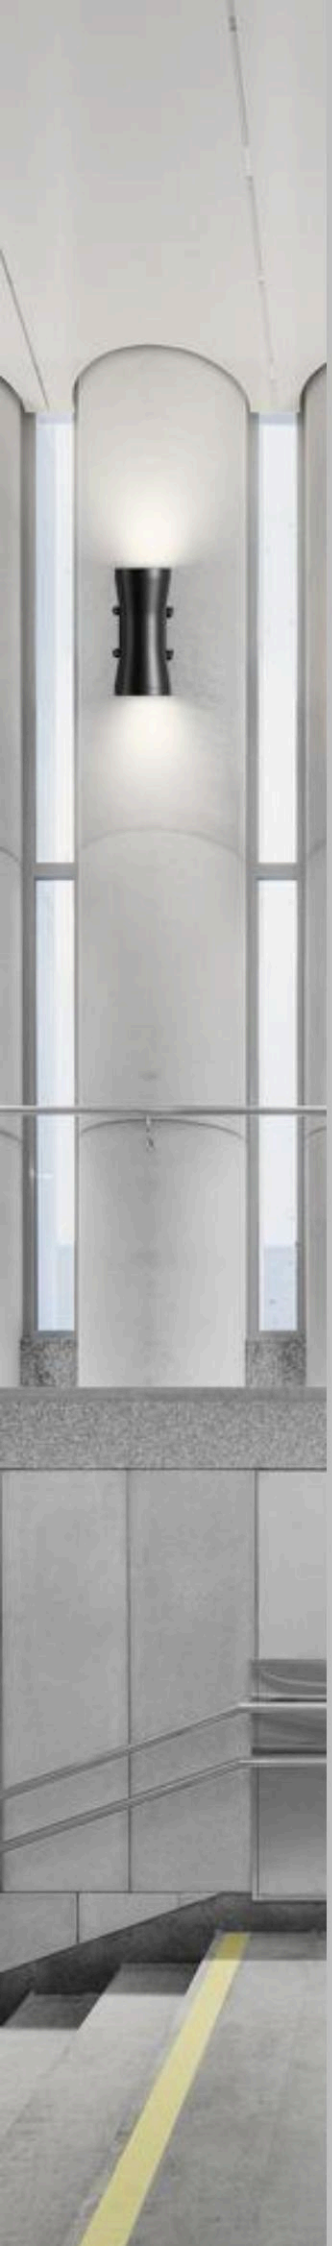

Variety Optic

Narrow symmetrical optic

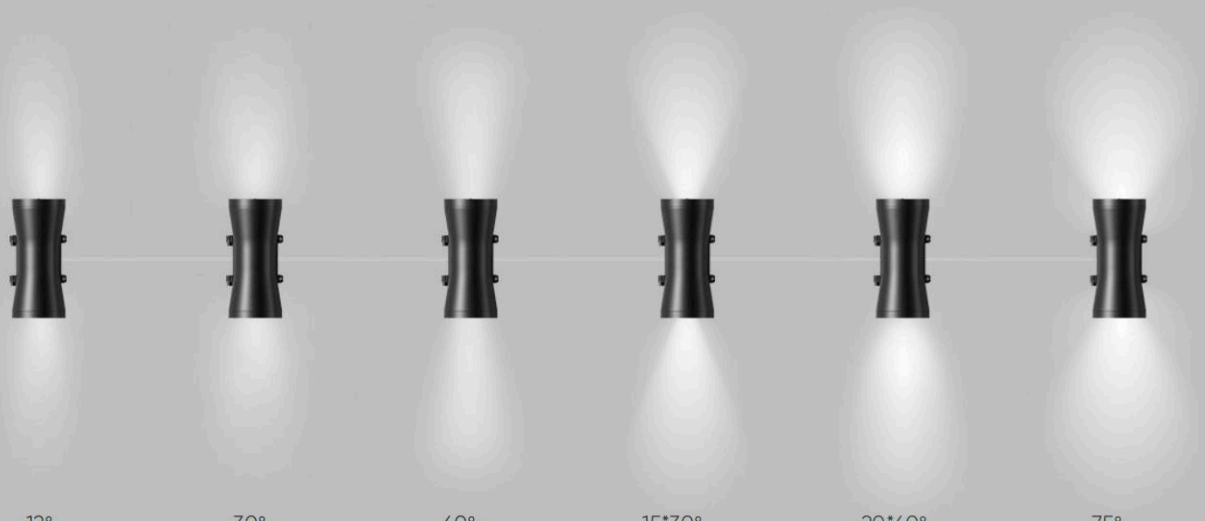

12° 30° 60° 15*30° 20*60° 75°

Embedded diffuser minimize glare,
soft lighting creating comfortable visual experience

UGR <19





ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	WP07
Power	20W, 40W, 60W
Efficacy	120lm/W
Input Voltage	100-240 VAC, 220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	2700K, 3000K, 4000K, 5000K
CRI(Ra)	70, 80
Control	Dimmable, Photocell
IP Rating	IP66
IK Rating	IK08
Mounting Option	Wall mounting
Warranty	5 Years
Surge Protection	6kV line-line, 10kV line-earth
Operating Temperature	-30°C to + 50°C

The product has been discontinued online. Please contact our sales representative for more information. WP07 is an LED cylinder outdoor wall wash, up and down sconce light. Equipped with die-casting aluminum and specially processed safety glass prevents dirt and water from accumulating on the luminaries, IP66 waterproof level. With its unpretentious and compact design, WP07 quietly blends into architectural environment at day and night. The attractive structure brings life to outdoor facades with a warm statement. Variety narrow beam light distribution optionally with light emission from up and down. A direct/indirect wall luminaire, this fixture brings decorative and functional forms in perfect balance. Light distribution: Up and Down lighting emission. Housing: made of die-casting aluminium. Body colour: textured black RAL 9017. Applications : for hotel lobby, conference rooms, corridor and auditoriums to entryways, facades, awnings, etc.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4