AGC lighting




LHB13 RoLine

IP69K and anti-corrosion

Tubular Light for commercial & industrial areas

IP66 IP69K IK10 1-10V DALI 2

KIRITO

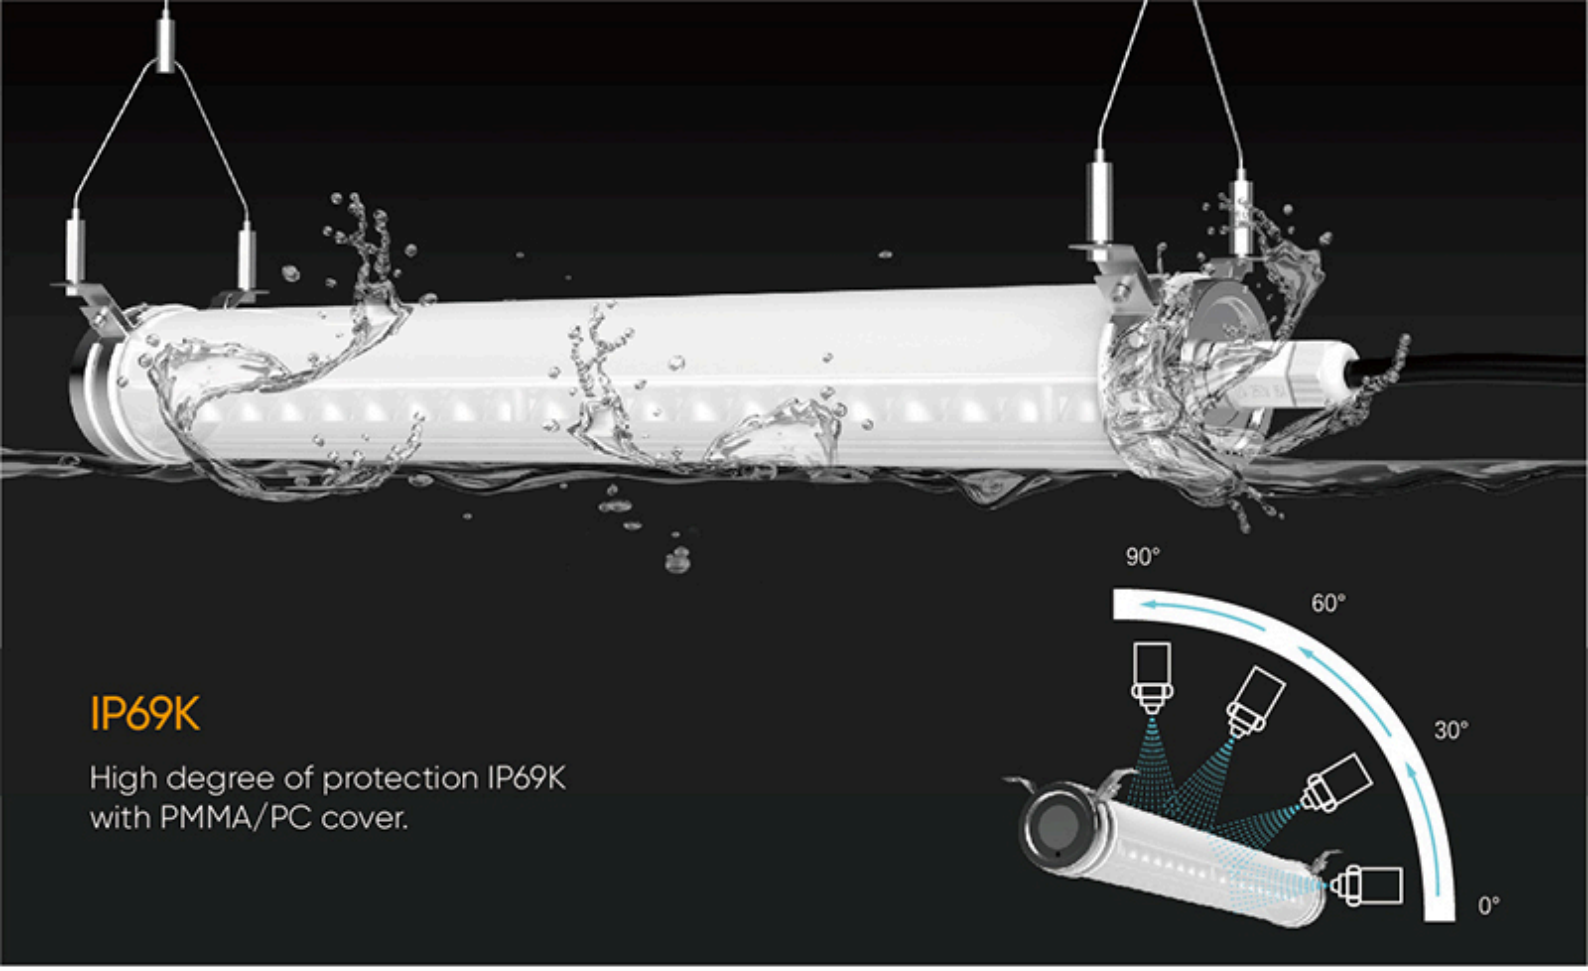

IP69K

High degree of protection IP69K
with PMMA/PC cover.

Anti-corrosion

Aluminum heat sink inside the PMMA/PC housing.
Screw and end caps made of 316 stainless steel.





Food Processing Factory


Car Washing Factory


Farm Livestock

Frosted PMMA housing for high
anti-ammonia and alkali liquid


Swimming Pool


Glass housing for high
anti-chlorine

Visual Comfort

Add 60 deg or 90deg Honeycomb diffuser into clear PMMA / PC housing, UGR<12 when at 60deg beam, UGR<16 when at 90deg beam, perfect for office and corridor lighting.





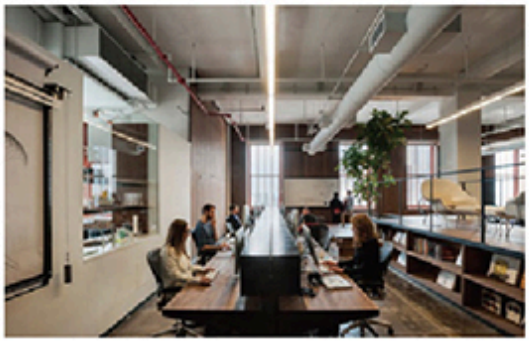






Flexible in wiring connection

Click the terminal block to fix or take out cables quickly.
With plug-and-play 316 stainless steel end caps and bracket, lights can be connected with each other from side easily.

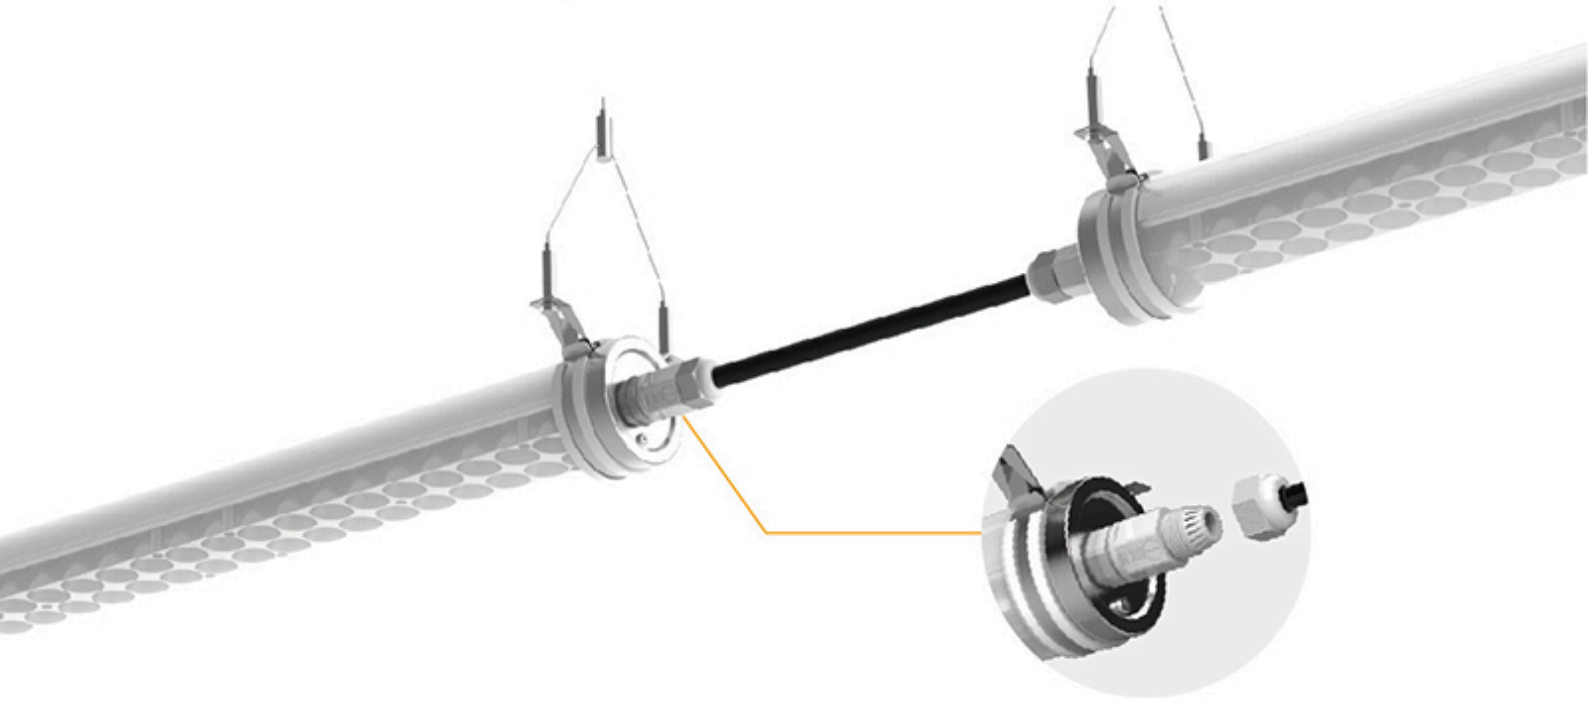


ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	LHB13
Power	20W, 40W, 50W
Efficacy	130lm/W, 140lm/W
Input Voltage	220-240VAC, 100-277VAC, 50 / 60 Hz
Power Factor	>0.90
UGR Level	19
CCT	4000K, 5000K, 3000K
CRI(Ra)	80, 70
Control	DALI, 1-10V Dimmable, Dimmable
IP Rating	IP69K, IP66
IK Rating	IK10, IK06
Mounting Option	Pendant, surface, Wire Suspension, Ceiling Mounting
Warranty	5 Years
Surge Protection	1kV line-line, 2kV line-earth
Operating Temperature	-30°C to + 40°C

LHB13 RoLine features a robust plastic housing that is impact-resistant and capable of withstanding high-temperature water washing at 80°C, with pressures up to 100 bar (1450 psi). It operates within a power range of 20W to 60W, with an efficacy of up to 140 lm/W. The wide 120° beam, along with the optional honeycomb lens that provides medium beams of 60° or 90° to reduce glare (UGR < 16), makes it particularly suitable for food applications. Applications Agricultural Shed

PRODUCT VIEWS

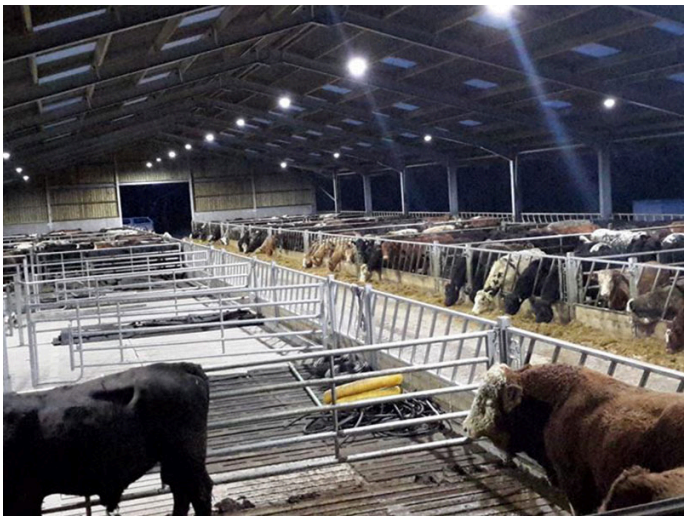

VIEW 1



VIEW 2



VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5