

LHB26 SlimPro

Seamless connection, no dark space

Linear Trunking System for Industrial and Commercial Lighting

150lm/W

LEDiL Lens


Flexible Collocation

Visual Comfort

DALI 2.0



Excellent appearance design, seamless connection-no dark space

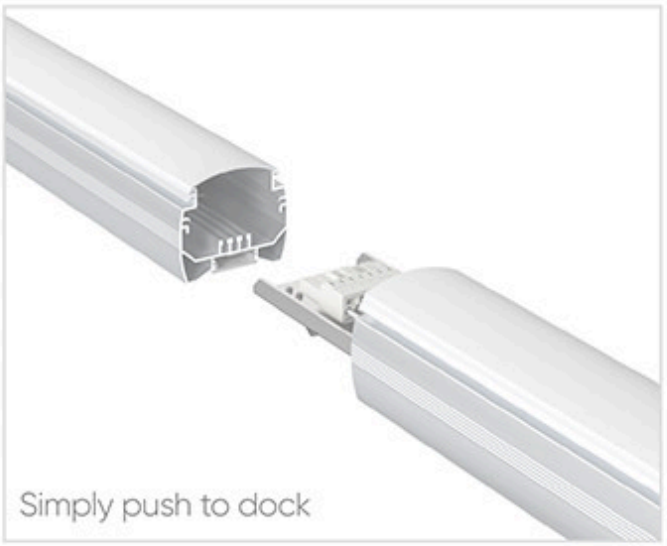

Simply push to dock



Seamless after docking

LEDiL lens, diversified light distributions, visual comfort







LO0115




LO0118

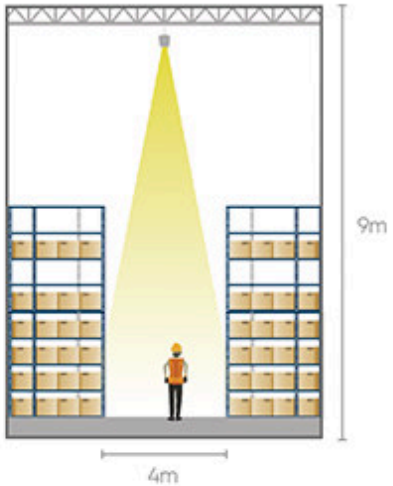

LO0111

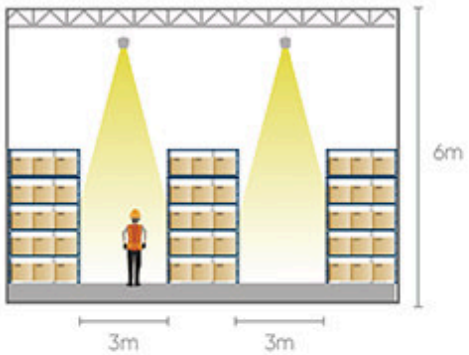


LO0113

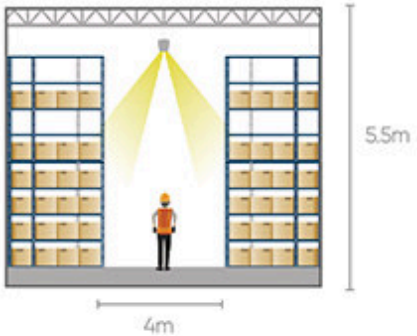

LO0114

3 phase & single phase electrical wiring installation

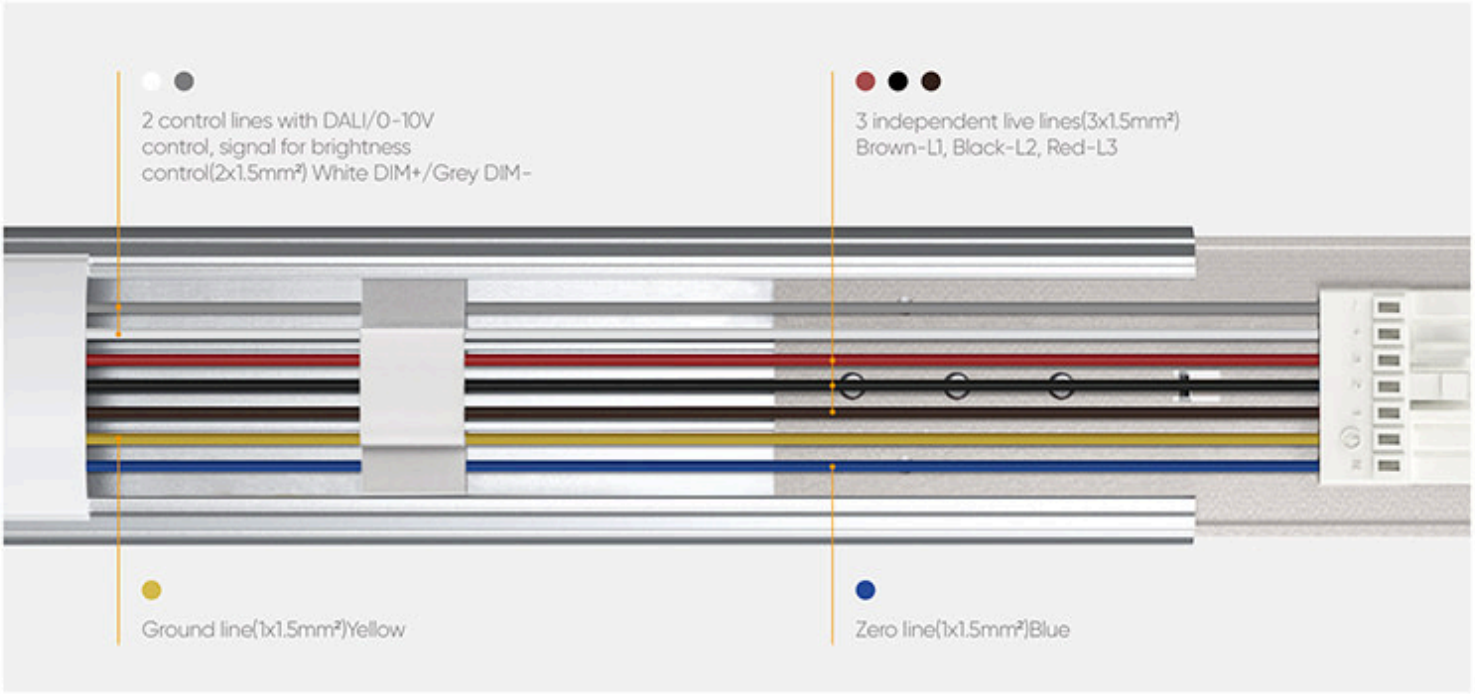

Maximum connection quantity for single-phase(240Vac)

Carrying capacity of the breaker

When using PHILIPS driver supply

Power \ Breaker	B16	B25	B60(Max)	C16	C25	B60(Max)
40W	33PCS	51PCS	55PCS	55PCS	55PCS	55PCS
60W	24PCS	37PCS	37PCS	37PCS	37PCS	37PCS
75W	24PCS	30PCS	30PCS	30PCS	30PCS	30PCS

When using LIFUD driver supply

Power \ Breaker	B16	B25	B60(Max)	C16	C25	B60(Max)
40W	39PCS	55PCS	55PCS	55PCS	55PCS	55PCS
60W	32PCS	37PCS	37PCS	37PCS	37PCS	37PCS
75W	24PCS	30PCS	30PCS	30PCS	30PCS	30PCS

When using three phase electricity, the qty of spliced fixtures can be 3 times of that using single phase. Above info is just for reference, in practice please also consider the difference of the breaker of different brands/items .





ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	LHB26
Power	40W, 60W, 75W
Efficacy	150lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80, 90
Control	DALI, 0-10V
IP Rating	IP20
IK Rating	IK04
Mounting Option	Wire Suspension, Ceiling Mounting
Warranty	5 Years
Surge Protection	Line-Line:1kV, Line-PE:2KV
Operating Temperature	-20°C to + 50°C

SlimPro would comfort your eyes with the cutting edge optics LEDiL lens and light distributions without sacrificing high efficiency. The light is quite soft and uniform. It's also compatible with a variety of dimming modes (0-10V/ DALI). Plus, multiple lamps can be flexibly combined and spliced. Excellent patent appearance design LEDiL lens delivers high quality and diversified distributions Seamless connection, no dark spots Three firelines design which can be flexibly stitched A maximum of 50 fixtures can be combined to achieve flexible collocation Wire suspension installation and ceiling installation optional Applications: For offices, hotels, warehouses, supermarkets, corridors, airports, subway stations, high-speed rail stations

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4