
AGC lighting

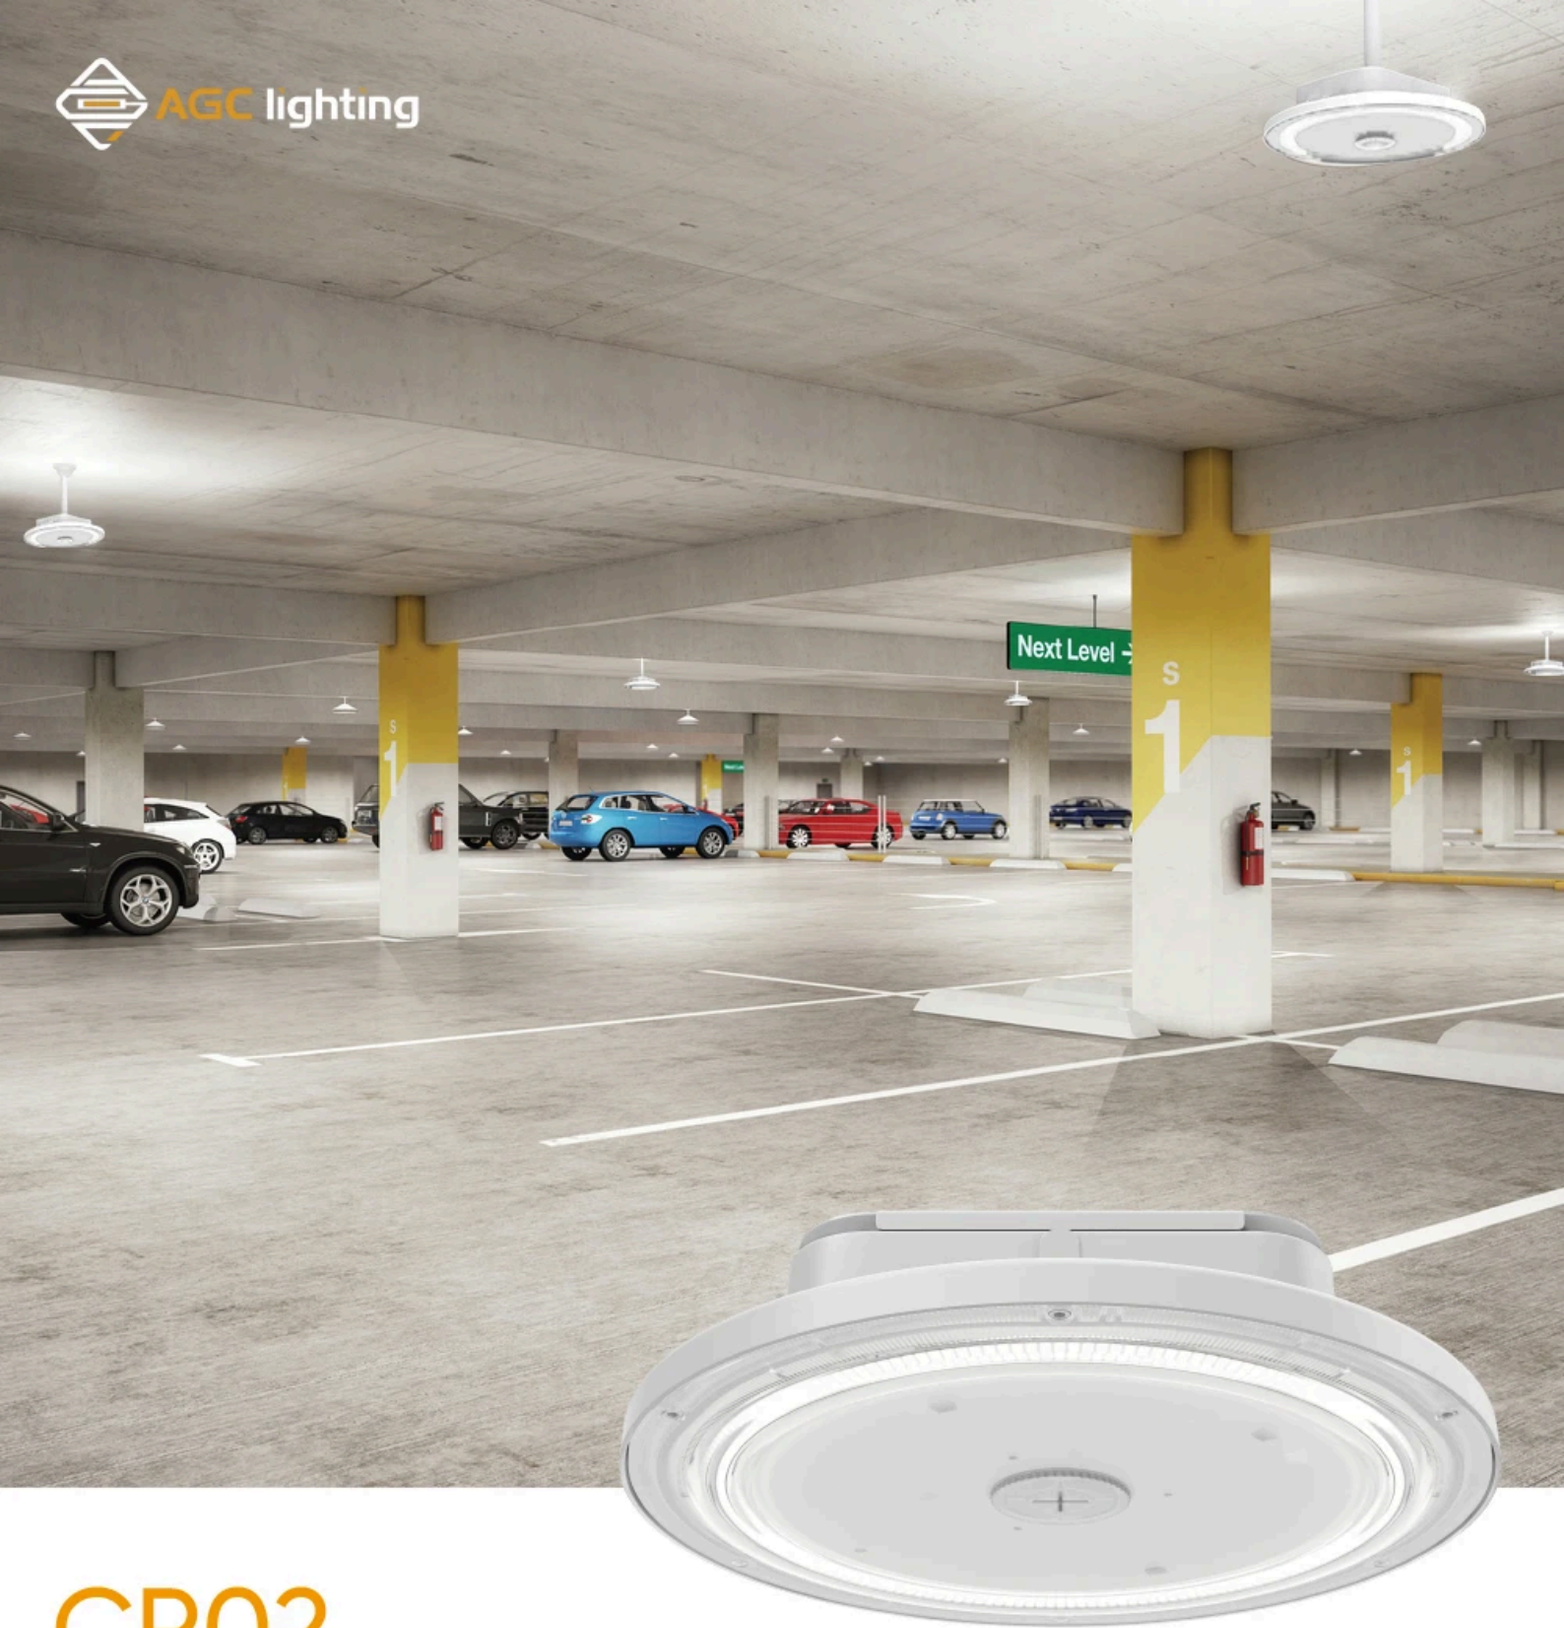

CP02

FIELD ADJUSTABLE Parking Garage Light


25W / 40W / 60W / 80W / 100W


- Up to 165lm/w
- IP65
- IK08
- Selectable
- Microwave Motion Sensor
- PIR Sensor
- 5 YEARS Warranty

KIRITO

Up Light Module

CP02 has uplight as standard, which would reduce cave effect
The uplight flux accounts for 5%-10% of the total fixture light flux.

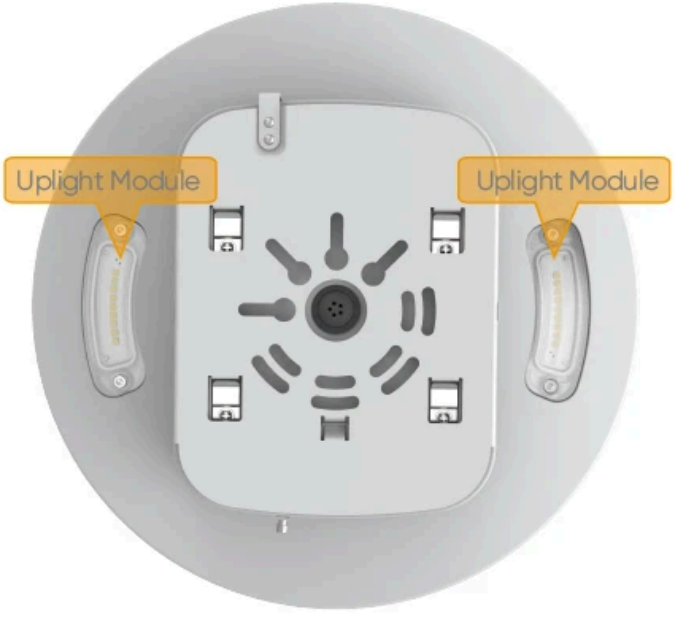

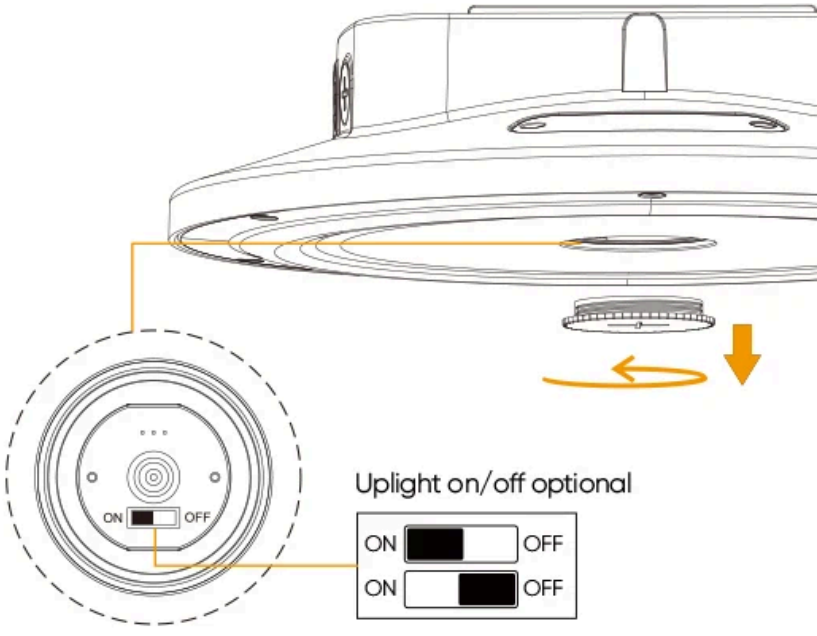


EMB Available


External emergency battery is available, which would be connected through a quick connector, allowing the fixture to work 1.5 hrs when there is a blackout.

90 mins

8W

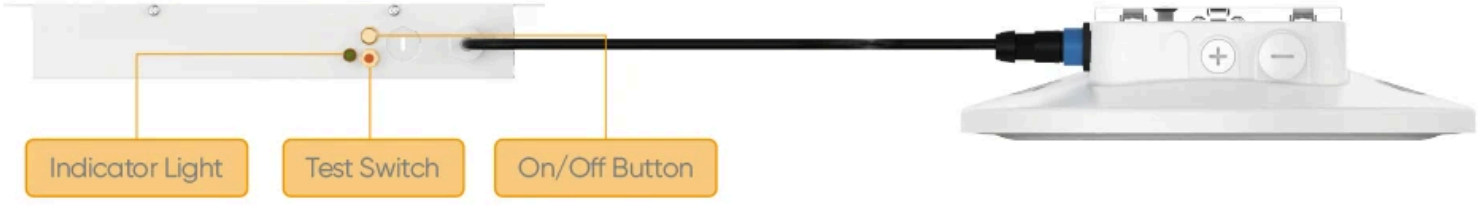

Accessories

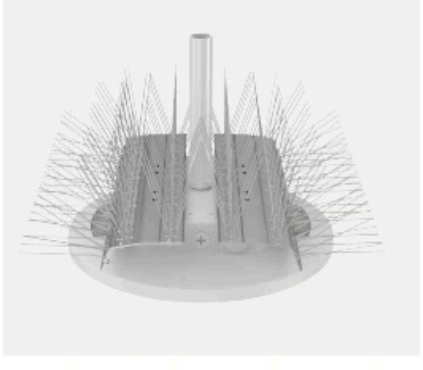

Bird Spike



Wire Guard




House Side Shield

Field Adjustable

· 3 CCT Adjustable


3000K, 4000K, 5000K adjustable

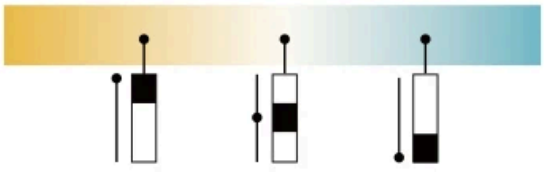



Power	100%	75%	50%	30%
25W	25W	19W	13W	7.5W
40W	40W	30W	20W	12W
60W	60W	45W	30W	18W
80W	80W	60W	40W	24W
100W	100W	75W	50W	30W

· 4 Wattage Adjustable

30%, 50%, 75%, 100% adjustable

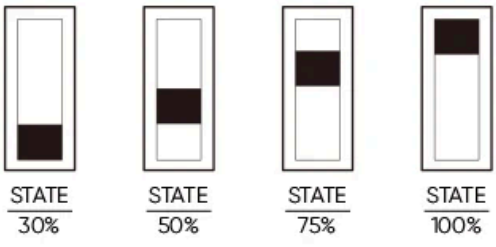

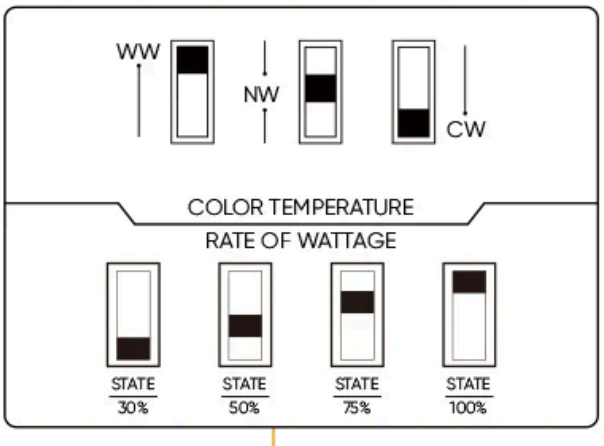

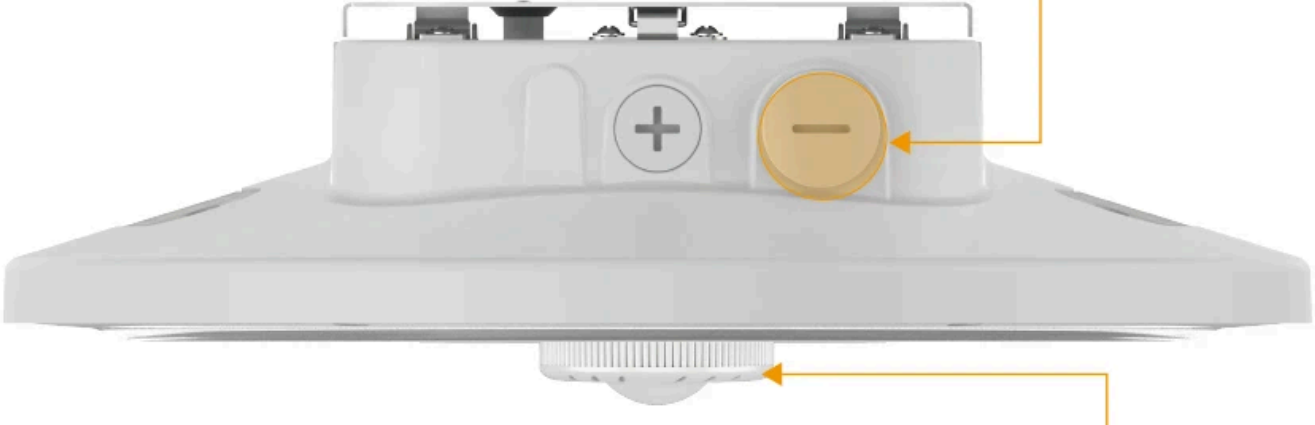

Microwave & PIR Sensor

Plug-and-play Microwave and PIR sensor control make it more energy-saving based on 160lm/w and saves your electric bills.



Microwave Motion Sensor

PIR Sensor

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	CP02
Power	25W, 40W, 60W, 80W, 100W
Efficacy	140lm/W, 150lm/W, 160lm/W
Input Voltage	120-277VAC, 120-347VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
Control	Dimmable, Microwave Sensor, PIR Sensor, Emergency
IP Rating	IP65
IK Rating	IK08
Mounting Option	Surface, Conduit mounting
Warranty	5 Years
Surge Protection	4kV line-line, 6kV line-earth
Operating Temperature	-30°C to + 50°C

The product has been discontinued online. Please contact our sales representative for more information. Terse design of appearance, simple and light structure, more in line with the modern aesthetic. Uplight as a standard design feature, which eliminates the "cave effect" often caused by traditional parking garage light, making them ideal for applications that require more attention to the ambiance. ADC12 die-casting aluminum, which has an excellent heat dissipation effect. High output efficiency up to 160lm/W. PIR/microwave sensor are optional. 3CCT & 4 power adjustable. Uplight module: 5%-10% of the total fixture light flux. Emergency backup available. 3/4” NPT mount and ceiling mount are available. IP65. IK08. Applications: Indoor parking area, Garage, Basement

PRODUCT VIEWS




VIEW 1



VIEW 2



VIEW 3

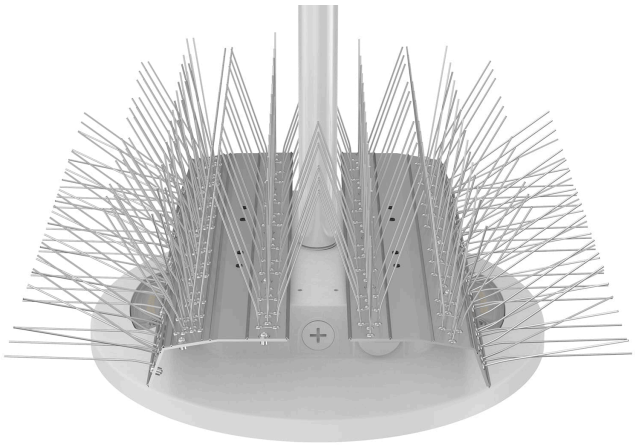

VIEW 4

PRODUCT VIEWS



VIEW 5



VIEW 6