Built-in Microwave sensor to reduce power consumption and save energy



For DALI control, available to own one 5 core cable for easy wiring

L	Brown		Black		Black	
N	Blue		White		White	
GND	Yellow/Green	Or	Green	Or	Green	
DIM+/AD1	Black		Red		Brown	
DIM-/AD2	Gray		Orange		Blue	





Aluminum Reflector



PC Reflector




KIRITO







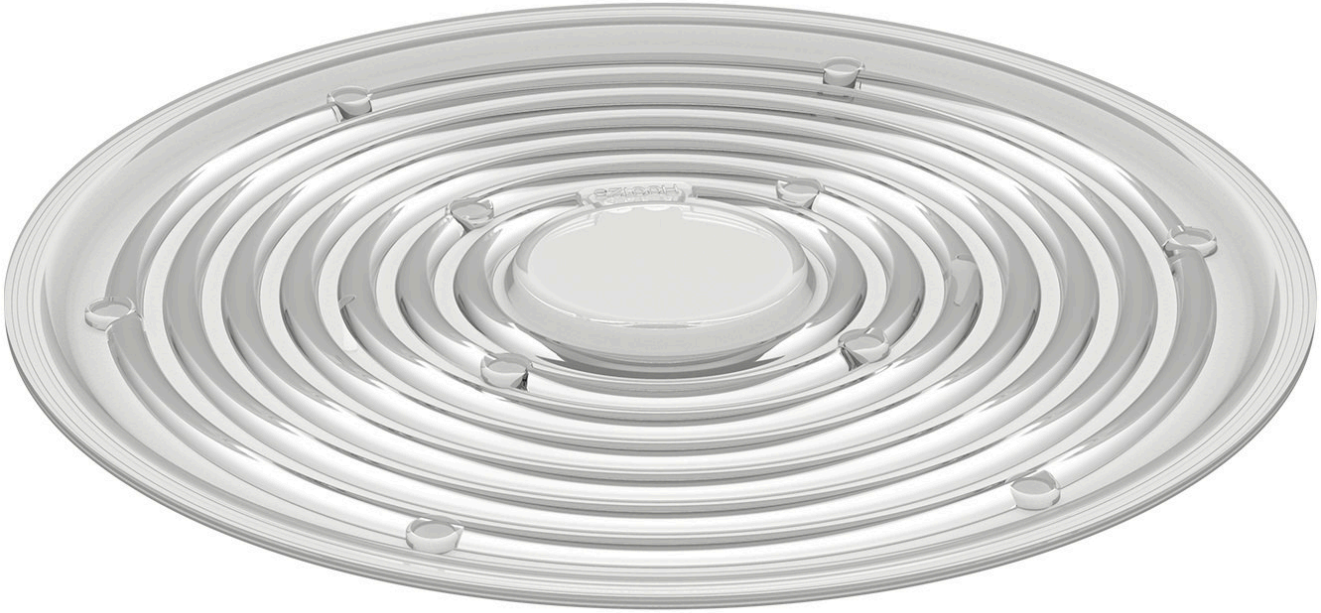

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	HB39
Power	100W, 120W, 150W
Efficacy	140lm/W
Input Voltage	100-240 VAC, 50 / 60 Hz
Power Factor	>0.95
UGR Level	28
CCT	5000K, 4000K, 3000K
CRI(Ra)	80
Control	Dimmable, DALI, Microwave Sensor, ZigBee Control, Wireless
IP Rating	IP66, IP69K
IK Rating	IK08
Mounting Option	Loop Hanging, Hook Mounting, Pipe Mounting
Warranty	5 Years
Surge Protection	4kV line-line, 4kV line-earth
Operating Temperature	-30°C to + 45°C

The product has been discontinued online. Please contact our sales representative for more information. IP69K and NSF approved, HB39 is also an ideal product for the food processing industry. The high bay has a big heat sink of φ400mm and excellent dissipation. It is very stylish in appearance and with an eye-catching design. Various accessories and mounting options make HiClean Gen III suitable for any area demanding a well-sealed and smooth high-output LED light fixture. Smooth exterior with no exposed fasteners. Built-in motion sensor is accessible. Wire guard, PC, or Aluminum reflectors available. Versatile eyebolt mount, hook mount, and 1/4, 3/4 pipe mount Applications Food Processing

PRODUCT VIEWS




VIEW 1



VIEW 2



VIEW 3

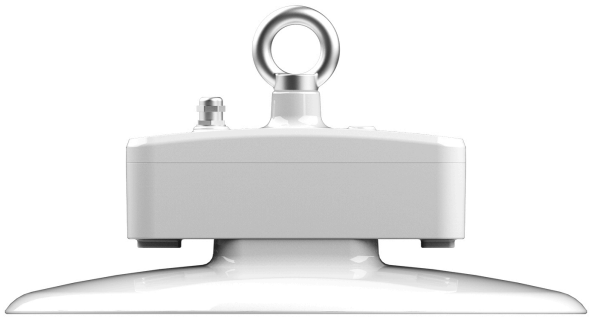

VIEW 4

PRODUCT VIEWS



VIEW 5