
High Integration

Separate driver solution
Driver module+ DALI or DMX converter + protective box


Consists of several parts with big size, very expensive to ship and installation is complex

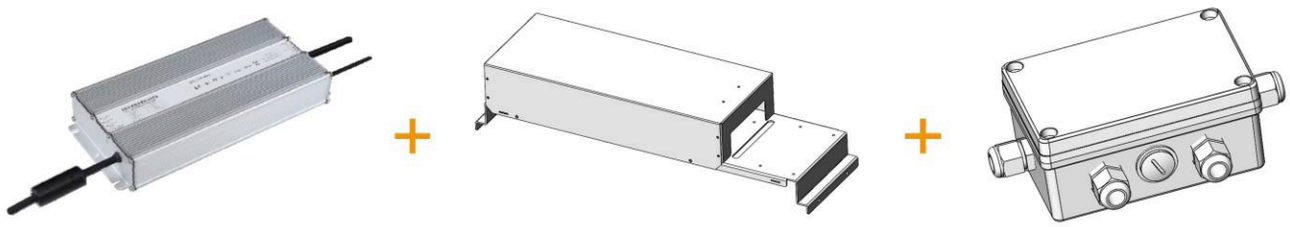

Upgrade

All-in-one driver solution
Isolated 0-10V/PWM/ Resistor/DMX 512/DALI Dimming + NTC CLO + IP66 10KV all in one driver

Multifunctional to save SKU. Compact design, easy to ship, install, maintain and connect wire

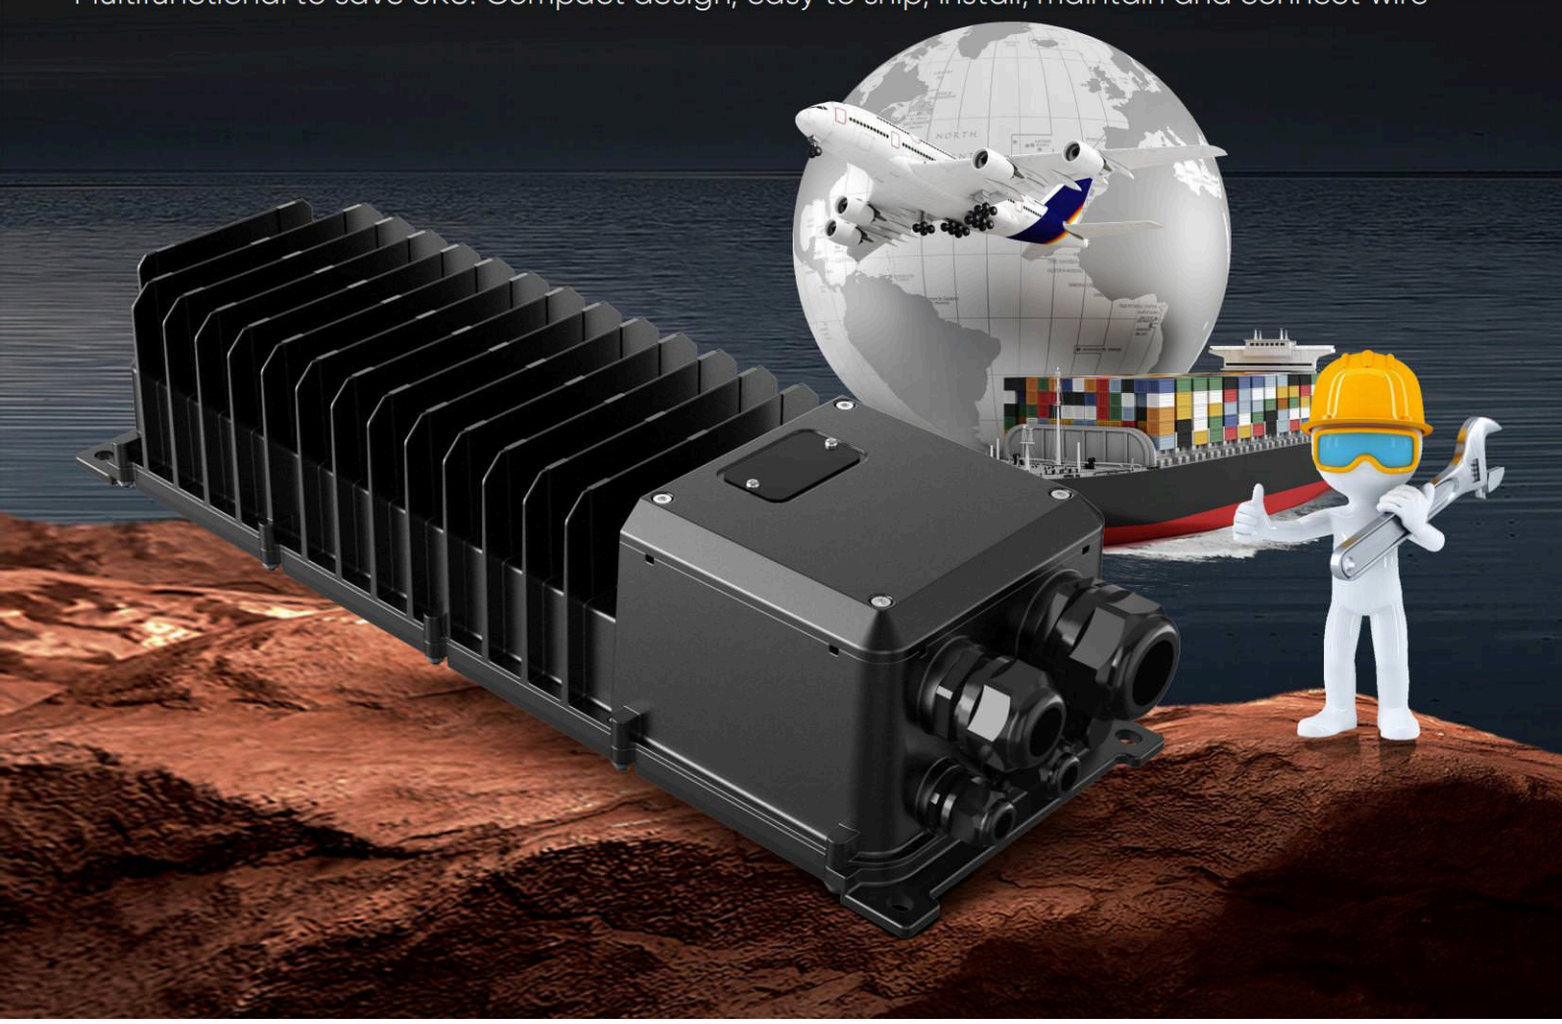

KIRITO



High Compatibility

3 channels constant current programmable outputs with free parallel connection to meet almost all project needs


High Flexibility

0-10V/PWM/ Resistor/DMX 512/DALI Dimming + NTC, CLO all in one driver


Nominal voltage:

Input 200-420VAC, covers almost all voltage ranges
Output 200-400VDC, max remote distance 200 meters


INPUT:

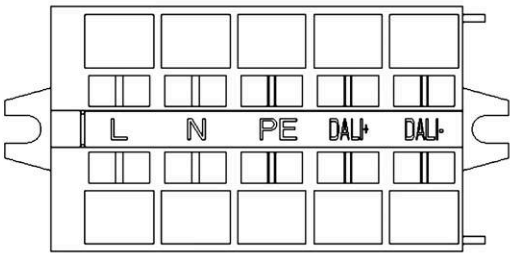

OUTPUT:

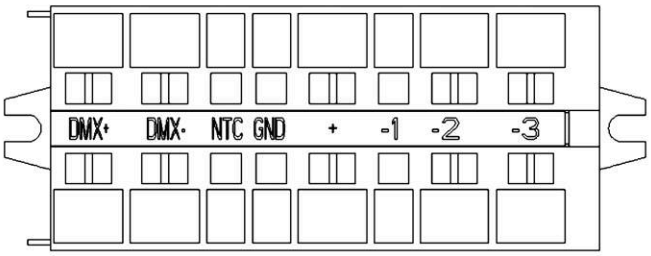

Input Section
M25 Cadle gland
Clamping range:13-18mm
Tightening force:7.5NM

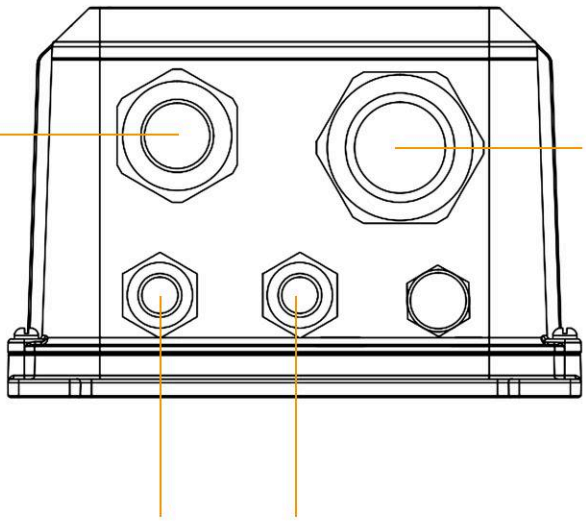

Output Section
M32 Cadle gland
Clamping range:15-22mm
or 6-10mm(3X)
Tightening force:8NM


Control Section
M16 Cadle gland(2X)
Clamping range:6-10mm
Tightening force:2.5NM

High Reliability

10KV surge protection
IP66 rated
Low copper housing with strong anti-corrsion performance
SoftStart, lifeTime and dataLog mode are available

IP66

10KV

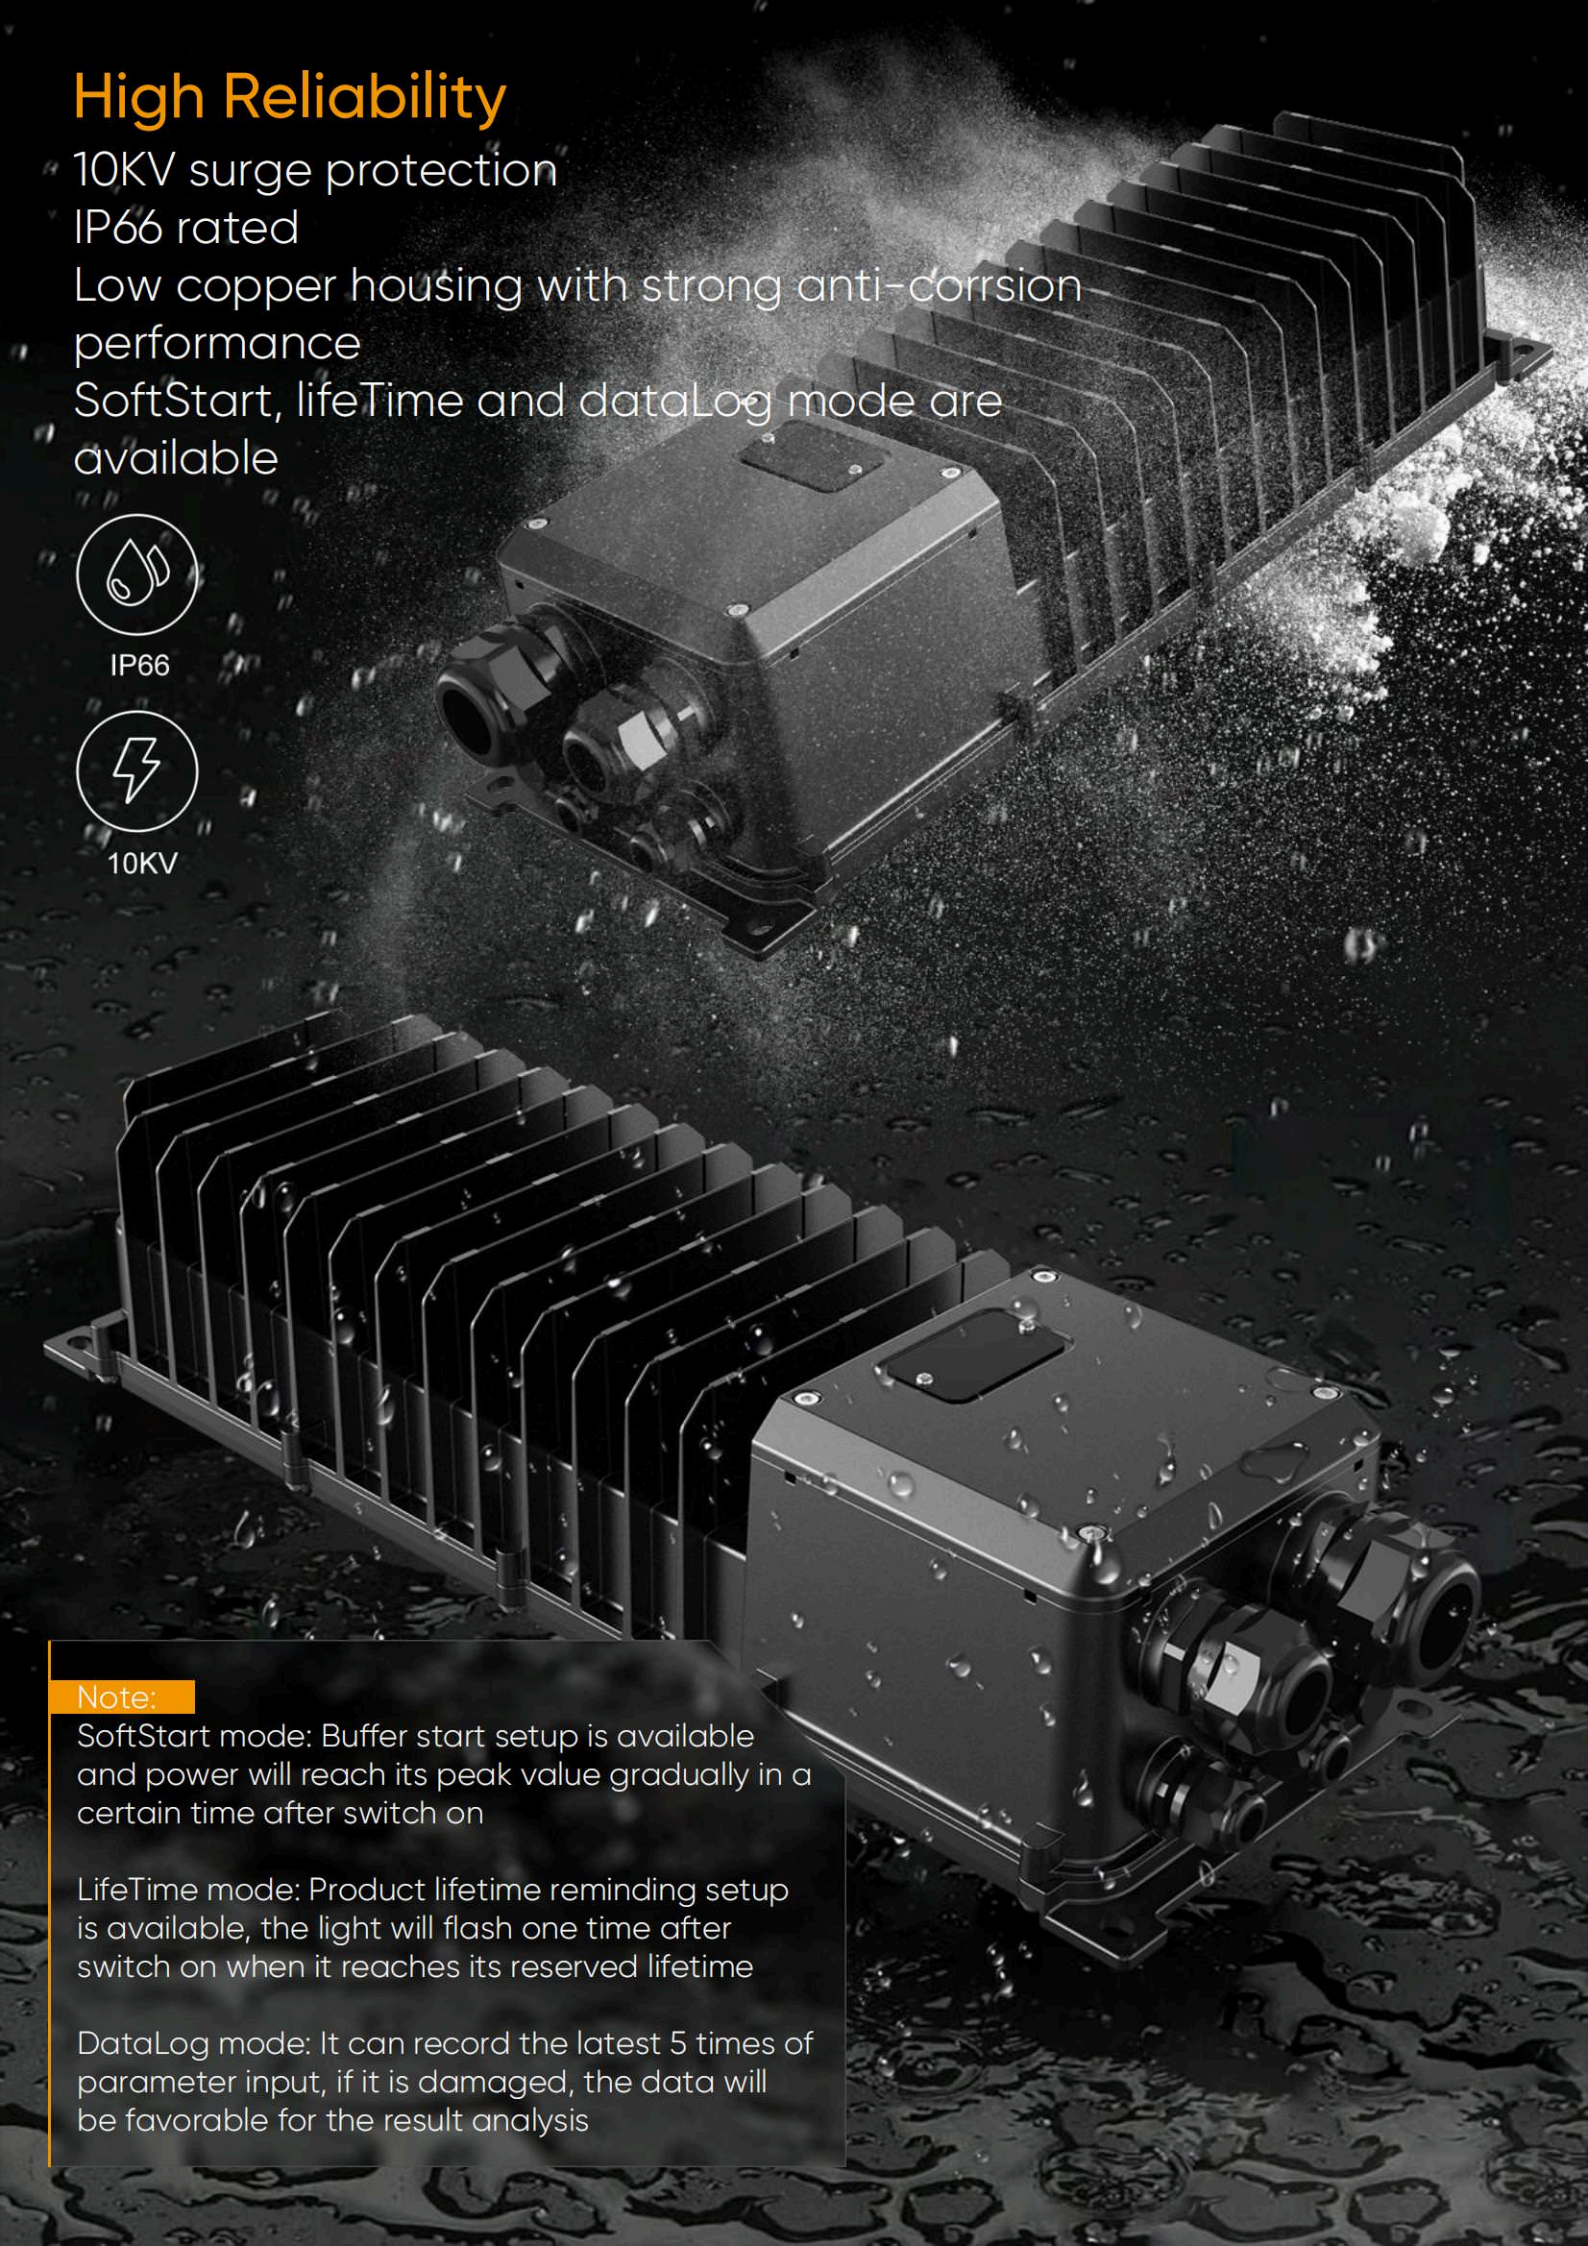

Note:

SoftStart mode: Buffer start setup is available and power will reach its peak value gradually in a certain time after switch on

LifeTime mode: Product lifetime reminding setup is available, the light will flash one time after switch on when it reaches its reserved lifetime

DataLog mode: It can record the latest 5 times of parameter input, if it is damaged, the data will be favorable for the result analysis

Full coverage of most lighting applications

Designed for stadium, horticulture, high mast and large area LED lighting.



Clamp bracket mount



Wall mount



Hook mount in the pole



Put driver in distribution box

ADDITIONAL PRODUCT SPECIFICATIONS

The product has been discontinued online. Please contact our sales representative for more information. Independent research and the developed multi-functional driver has main features like compact size, lightweight and competitive price. Various intelligent controls are optional and supported by professional software. Besides, it can record the latest 5 times of parameter input, if it is damaged, the data will be favorable for the result analysis. 3 independent output channels with free parallel connection, and 3 channels with constant current programmable outputs. Input 200-420VAC, covers almost all voltage ranges. Output 200-400VDC, max remote distance 200 meters. High efficiency of up to 97% - Constant Lumen function. Buffer start setup is available and power will reach its peak value in a certain time after switching on. Product lifetime reminding setup is available, the light will flash one time after being switched on when it reaches its reserved lifetime. Low copper material housing with strong anti-corrosion performance. Comply with UL8750 & EN61347-2-13 Safety Regulation. Highly integrated, easy to ship, install and maintain. Applications: Designed for stadium, horticulture, high mast and large area LED lighting. It is also suitable for most outdoor lighting applications, as well as TV/Broadcasting.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4