KIRITO



ST61 Versa-Lite

5 housings from 30W to 480W
A comprehensive road lighting solution

160lm/W | IP66 | IK09 | 10KV | 1-10V | Tc -40~+ 55℃ | C4 ani-corrosion | Timer Dimming | Photocell | DALI 2.0 | ZHAGA


5 housings from Mini to Extra Large

Full power range from 30W to 480W




Excellent heat dissipation

The finned heat sink provides excellent heat dissipation, with a working temperature range of -40°C to +55°C, making it suitable for harsh environments.

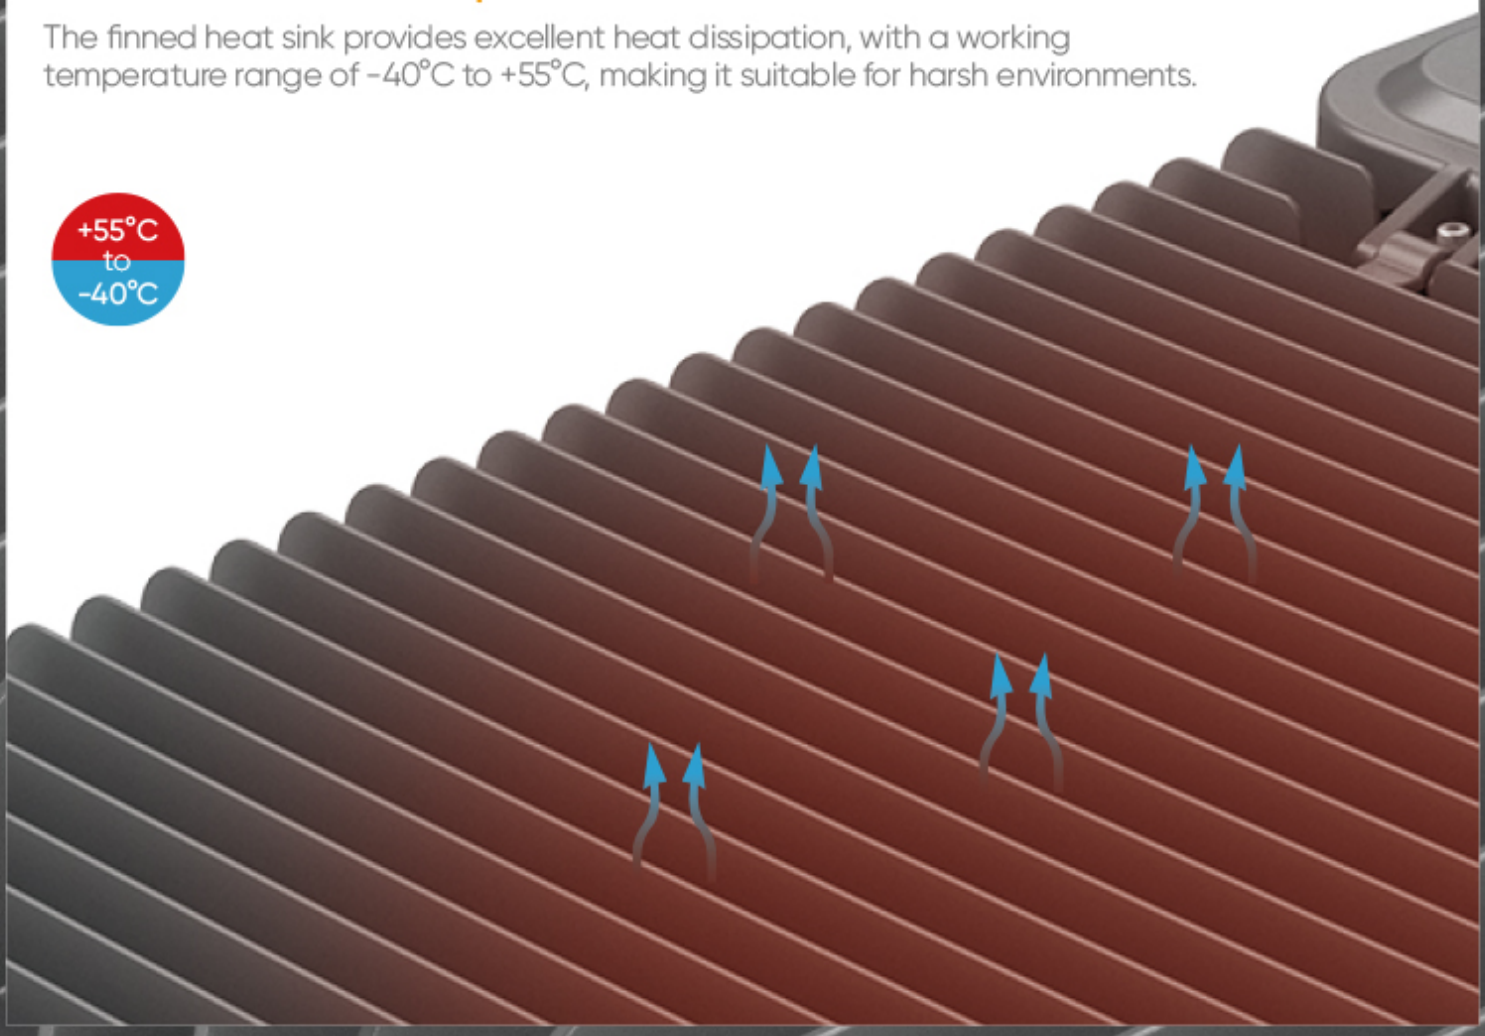

Strong anti-corrosion ability

DC01 low-copper housing, C4 corrosion resistant, 1000 hours salt spray test passed.

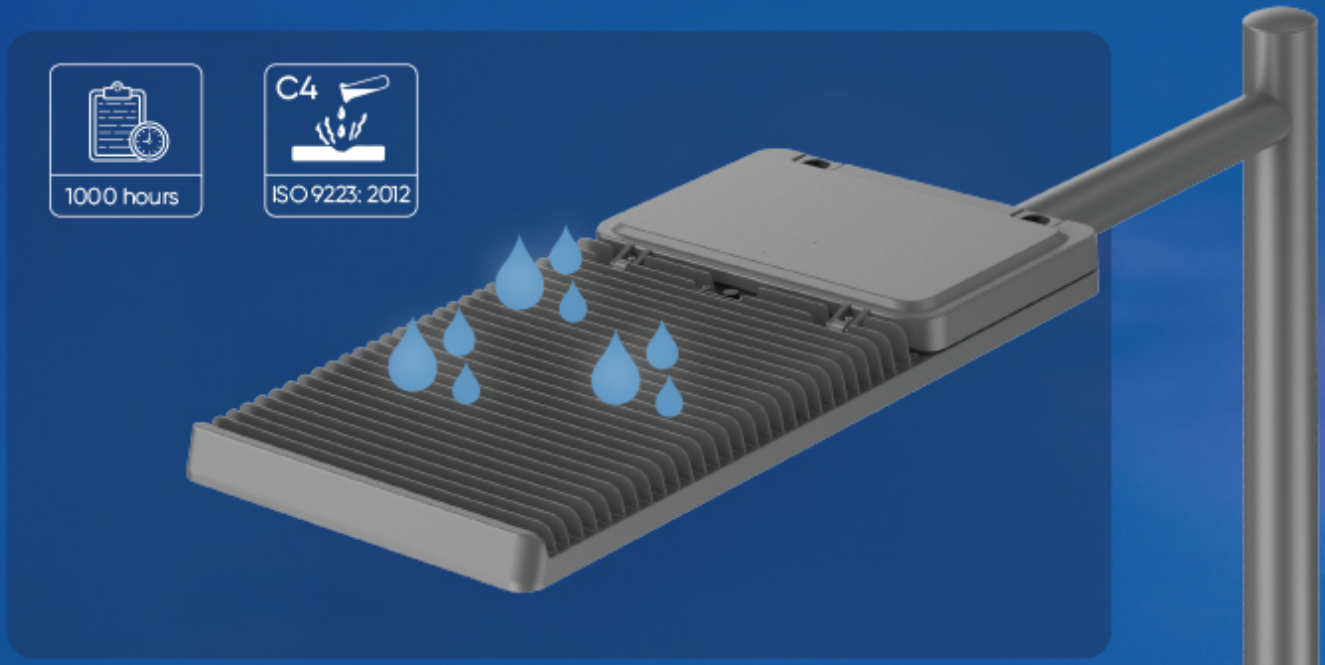

Numerous lighting distributions

Various optics for choice, compatible with SMD3030, SMD5050 for different road and street applications, high system efficacy up to 160LM/W

up to 160lm/w

up to 76800lm



R01601




R01602



R01603



R01604



R01605



R01606



R01607



R01609



R01610



R01611




R01613

Tool-free maintenance

Pull out the shaft to remove the cover, which is convenient and fast for toolless maintenance.

1

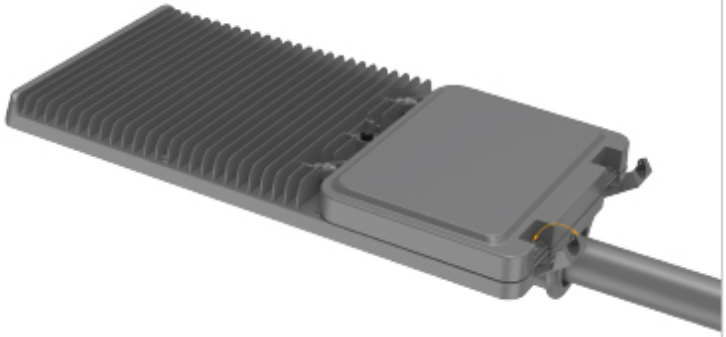

Pull out the shaft

2



Remove the cover

Pole Mounting

Compatible with 38/42/60MM OD poles.





ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	ST61
Power	30W, 50W, 75W, 100W, 120W, 150W, 200W, 240W, 280W, 320W, 350W, 400W, 480W
Efficacy	160lm/W
Input Voltage	120-240 VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	3000K, 4000K, 5000K
CRI(Ra)	70, 80
Control	DALI, Dimmable, Photocell, Zhaga Socket
IP Rating	IP66
IK Rating	IK09
Mounting Option	Side Entry
Warranty	5 Years
Surge Protection	10kV line-earth
Operating Temperature	-40°C to + 55°C

The product has been discontinued online. Please contact our sales representative for more information. With 5 housings from Mini to Extra Large and a full power range from 30W to 480W, the ST61 is a comprehensive lighting solution for all kinds of roads and streets. The ST61 is made of DC01 low-copper material, which is corrosion-resistant and suitable for harsh environments. Optional blue-light-free chips, ST61 is friendly to plants and wildlife. Full power range from 30W to 480W Low-copper housing, C4 corrosion resistant Compatible with various optics for different road and street applications, high system efficacy up to 160lm/W Compatible with 38/42/60mm OD poles IP66 & IK09 Support DALI/1-10V dimmable, photocell, ZHAGA book 18, timer dimming, daylight sensor etc. Optional bluelight-free lighting system, friendly to plants and wildlife operating temperature -40°C to + 55°C, suitable for harsh environments Applications: Parking lots, Traffic routes, Residential areas, Plazas


PRODUCT VIEWS



VIEW 1



VIEW 2

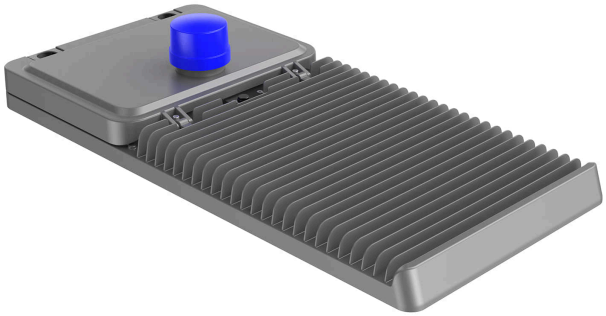

VIEW 3



VIEW 4

PRODUCT VIEWS



VIEW 5