


Key Advantages


Compact yet robust

5 sizes cover 50W to 240W, the appropriate size makes it compact yet robust.

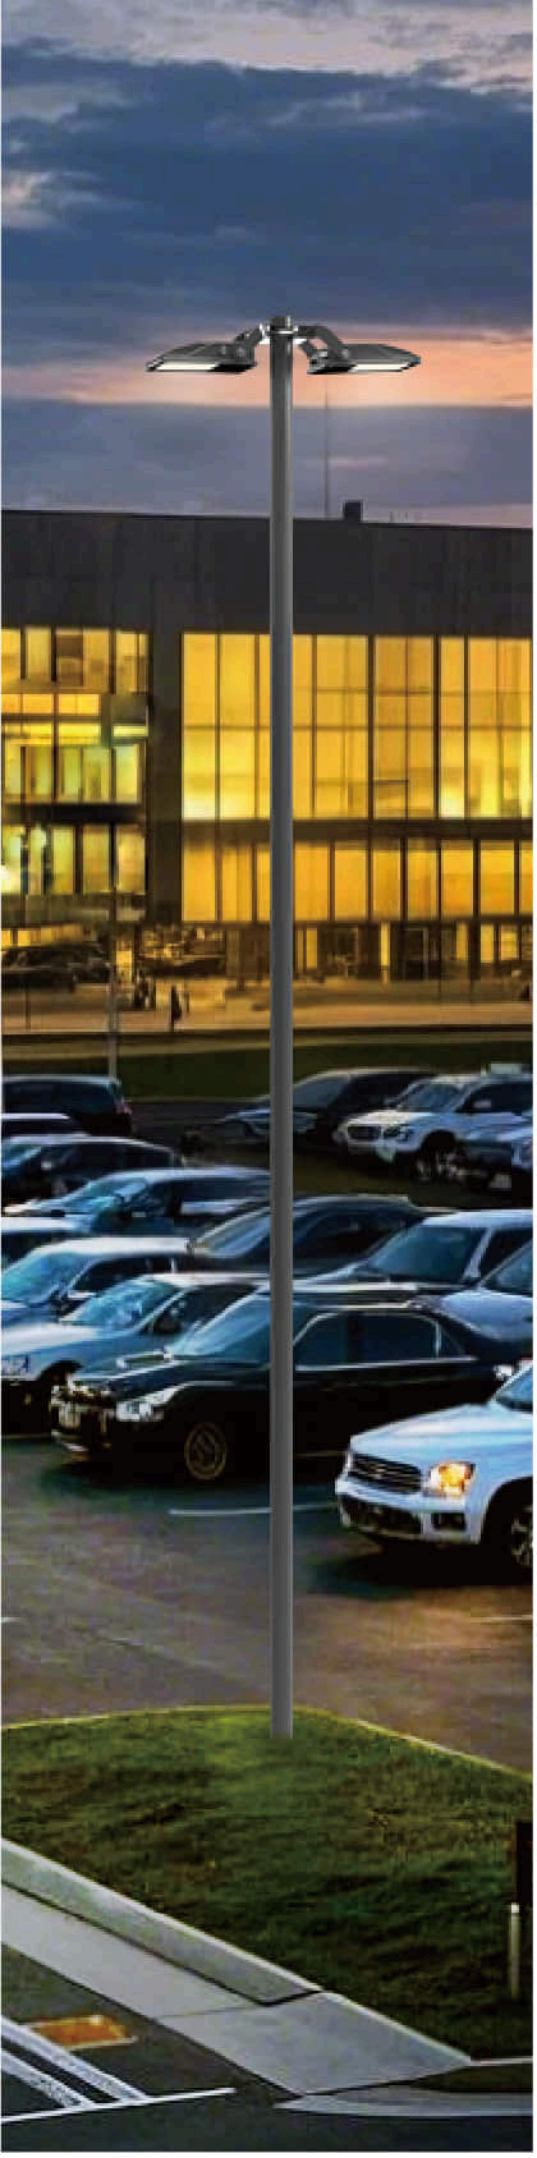


Efficient and Affordable

Corolla adapts to various mounting heights and meets diverse lighting needs, making it ideal for both private and commercial spaces.

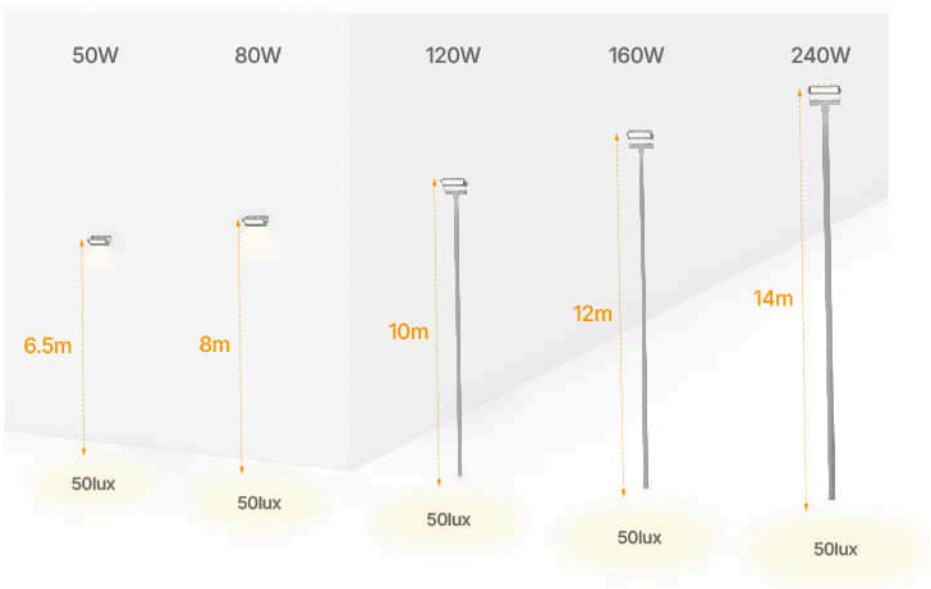

Longer Service Life

Equipped with a vent diaphragm valve to avoid condensation, improving flood light performance and enhancing its lifetime.

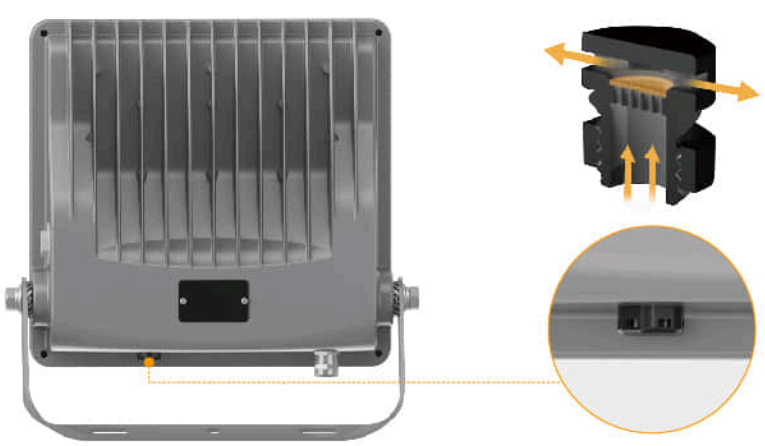

KIRITO

Available Versions

Glass Without Lens


Featuring a 120° wide beam and efficacy up to 170lm/W, this version integrates a photocell, 3 power & 3CCT selection, reducing SKUs while maximizing versatility.



CCT selectable



Power selectable



Built-in Photocell





Glass With Lens

With two popular, interchangeable lenses and efficacy up to 155lm/W, this version features a photocell, 3 power selection, and single CCT for uniform lighting.





F00823
Asymmetrical



F00826
Symmetrical

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	FL66
Power	50W, 80W, 120W, 160W, 240W
Efficacy	150lm/W, 170lm/W
Input Voltage	220-240 VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	4000K, 5000K
CRI(Ra)	70, 80
Corrosion Class	C3
Class Electrical Equipment	Class I
IP Rating	IP66
IK Rating	IK08
Mounting Option	Bracket Mounting, Pole Mounting
Warranty	5 Years
Operating Temperature	-30°C to + 50°C

Corolla is an efficient and versatile LED floodlight, available in two versions: glass without lens and glass with lens. The glass without lens version offers a 120° wide beam angle with an efficacy of up to 170lm/W. It features an integrated photocell, 3 power & 3CCT selection, reducing SKUs while enhancing flexibility. The glass with lens version provides two interchangeable lens options and an efficacy of up to 155lm/W. This version includes a photocell, three power level selections, and a single CCT for uniform lighting.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4