KIRITO

HB11 CelluLume

CelluLume, a premium industrial LED highbay featuring a unique honeycomb optic design for ultra-low glare.



- 150 lm/W
- IP65
- IK10
- PIR Sensor
- Microwave Sensor
- CASAMBI
- UGR<19

Superior dissipation system

466mm large diameter builds an efficient system.

Rapid Cooling



446mm

UGR<19,
Less glare, more comfort.

Hexagon shaped reflector effectively reduces glare and creates a comfortable environment.




200W Up to **30400lm**

120W Up to **19500lm**

Various applications


- Warehouses
- Factories
- Exhibition center
- Shopping mall
- Gymnasium



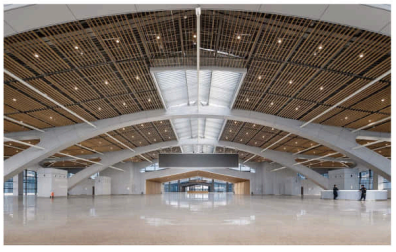


Power adjustable, flexible configuration

Reducing SKU and meeting various scenarios.

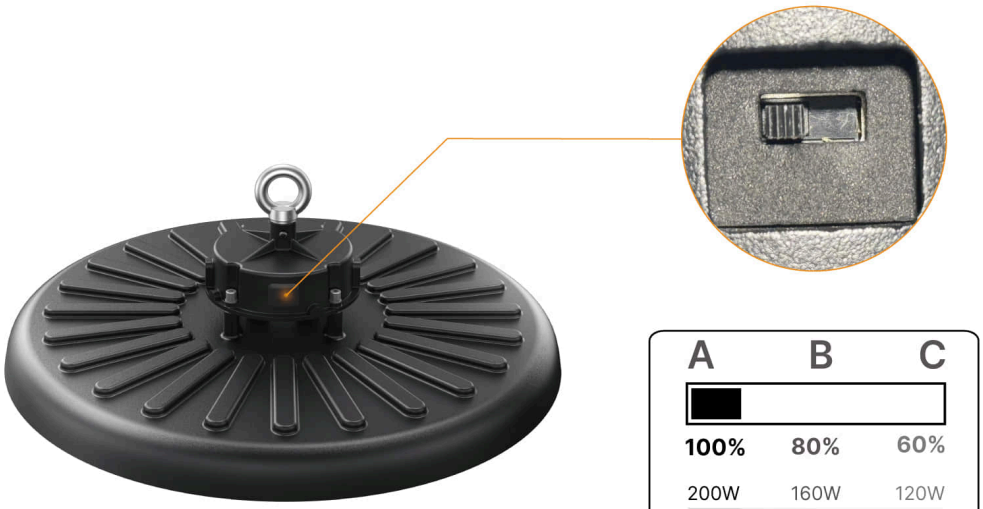

Smart controls

Zhaga book18 / Audio-Jack socket

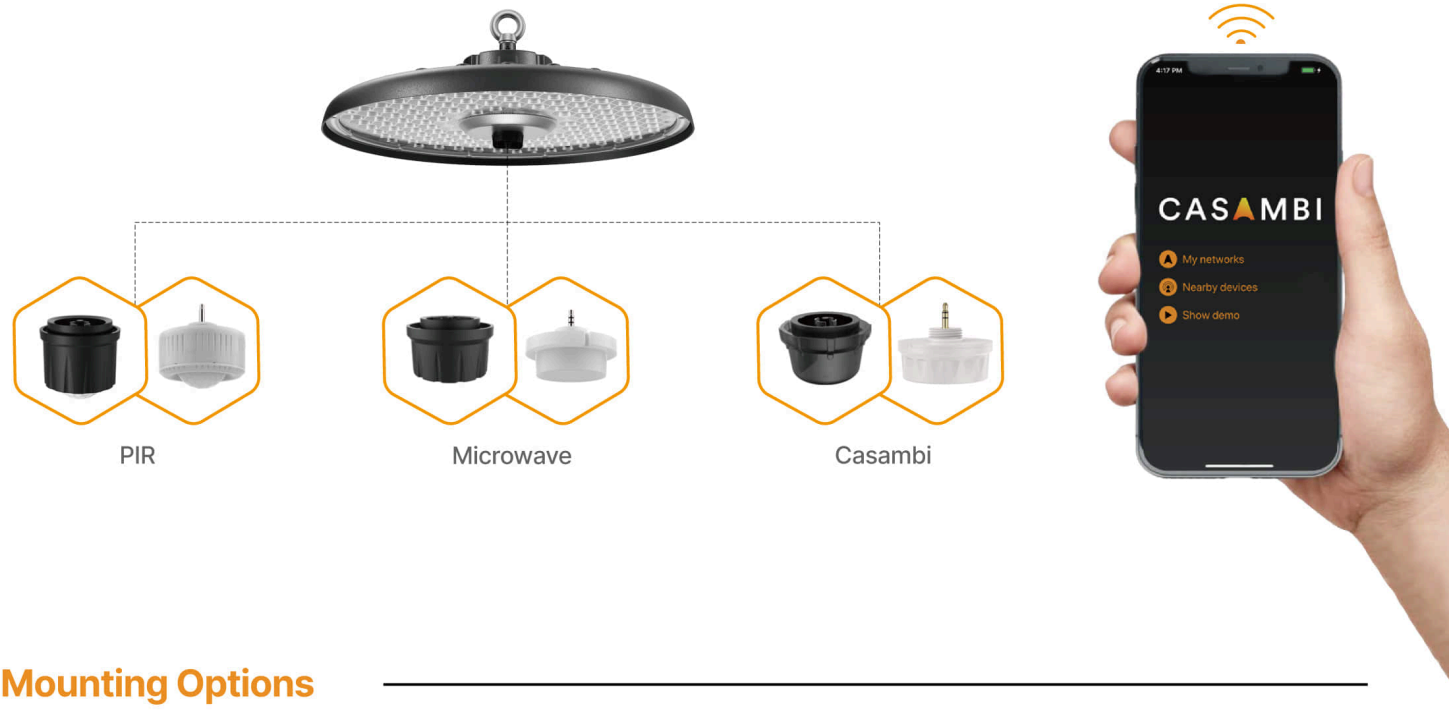

Mounting Options



Loop mounting

Ceiling mounting

ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	HB11
Power	200W
Efficacy	150lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.95
UGR Level	19
CCT	4000K, 5000K
CRI(Ra)	70, 80
Control	PIR Sensor, Microwave Sensor, Casambi, Zhaga Socket
IP Rating	IP65
IK Rating	IK10
Mounting Option	Loop Hanging, Ceiling Mounting
Warranty	5 Years
Operating Temperature	-30°C to + 50°C

CelluLume features a unique honeycomb optic design that delivers ultra-low glare with a UGR <19, ensuring visual comfort in demanding environments. With IP65 and IK10 ratings, CelluLume offers reliable protection and stable performance in industrial settings. Two smart control versions are available. One offers 3 selectable power levels, and optional Zhaga or Audio-Jack sockets, while the other supports DALI dimming.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3