NIKKON®

DRACO UF5 LED HIGHBAY





PC Reflector with Visor
(Upon Request)

LUMINAIRE SPECIFICATIONS

- **Power** 100W
150W
200W
- **Fitting Material** Non-Corrosive Die-Cast Aluminium
- **Fitting Color** Black
- **Fitting Optic** PC Cover lens
- **Ingress Protection** IP65
- **Voltage** 220 ~ 240 Vac 50 / 60Hz
- **Electrical Safety Class** Class I
- **Operating Temperature** -30 ~ +50ºC
- **Installation** Hook Mounting
- **Pre-Wire** 300mm
- **Surge Protection** 10KV, 5KA (External)
- **Safety Chain** 500mm

LED MODULE SPECIFICATIONS

- **Color Temperature** 5700K
- **Color Rendering Index (CRI)** Ra ≥80
- **L70** 100,000 Hrs @ 25ºC

COMPLIANCE STANDARD

- **LED** LM80
- **DRIVER** EN/IEC 61347, EN/IEC 55015, EN61547, EN/IEC61000
- **LUMINAIRE** IEC 60598-1, IEC 60598-2-1

APPLICATION

- Warehouse, Supermarket, Exhibition Center, Gym Room, Shopping Mall, Library

OPTIONAL FEATURES (UPON REQUEST)

- **Reflector** PC Reflector with Visor (11 inches)

MEASUREMENT & ORDER CODE


WATTAGE	ORDER CODE	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	QTY / CARTON	NETT WEIGHT (PER UNIT)	CARTON DIMENSION (L x W x H) mm
100W	UF5 100W	14500lm	100W	1pc/ctn	1.5 kg	245 x 245 x 165
150W	UF5 150W	22500lm	150W	1pc/ctn	1.7 kg	260 x 260 x 175
200W	UF5 200W	30000lm	200W	1pc/ctn	2.2 kg	290 x 290 x 180

* All result tested base on 5700K CCT LEDs.




DIMENSION


UF5 100W

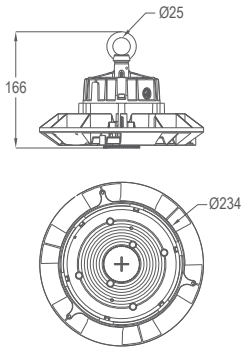


UF5 150W

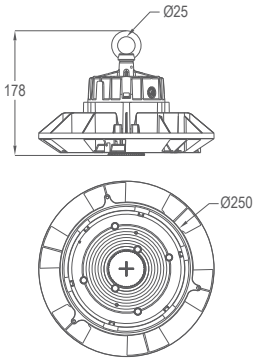


UF5 200W

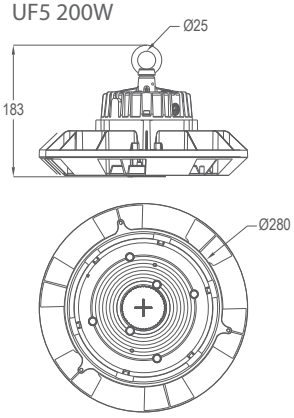

PC Reflector




PC Visor




PHOTOMETRIC


UF5 100W



UF5 150W



UF5 200W



Note: All specifications are subject to change without prior notice for product improvement. Images are for illustrative purposes only.