NIKKON®

VUPA - G1 LED GARDEN LIGHT



LUMINAIRE SPECIFICATIONS

- **Power** 40W
60W
75W
- **Fitting Material** Non-Corrosive Cast Aluminium
- **Fitting Color** Black / Light Grey
- **Optical Cover** Tempered Glass
- **Ingress Protection** IP66
- **Impact Protection** IK08
- **Voltage** 220 ~ 240 Vac 50 / 60Hz
- **Power Factor** ≥0.9 (at Full Load)
- **Operating Temperature** -30 ~ 40ºC
- **Installation** Ø60mm / Ø76mm (Upon Request)
Post Top or Round Bar
- **Surge Protections** 4KV
- **Pre - Wire** 1.5m

LED MODULE SPECIFICATIONS

- **LED Chips** 3030
- **Color Temperature** 3000K Warm White
4000K Neutral White
- **Color Rendering Index (CRI)** RA >70
- **L70** 50,000 Hrs @ 25ºC
- **Beam Angle** Type V (140° x 140°)
- **PCB Material** Metal Core

COMPLIANCE STANDARD

- **LED** LM80, UL, RoHS
- **Driver** CE, EN62493, EN61347, EN50581, EN55015, EN61000, EN61547, EN62384

CE

APPLICATION

- Courtyard, Garden, Community, Causeway


MEASUREMENT & ORDER CODE

WATTAGE	LUMEN	CONSUMPTION	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
40W	4800lm	42W	530 x 530 x 245	7.5 kg
60W	7200lm	63W	530 x 530 x 245	7.5 kg
75W	9000lm	79W	530 x 530 x 245	7.5 kg


* Please indicate LED color temperature when ordering.
* All result tested base on 3000K CCT LEDs.



DIMENSION

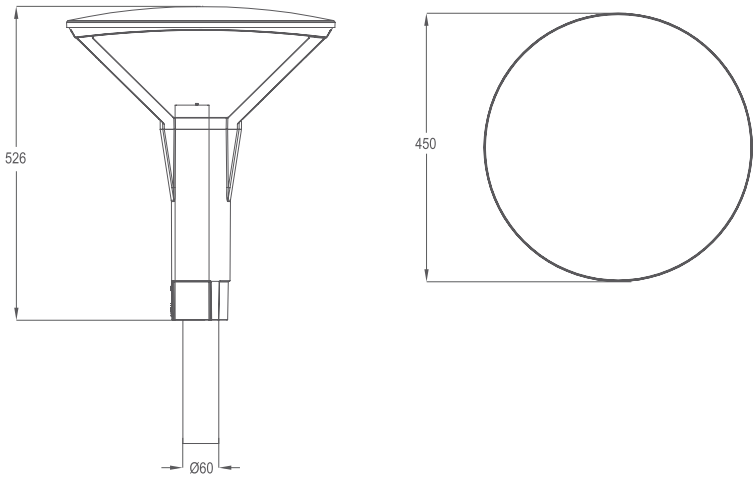

PHOTOMETRIC



Note: All specifications are subject to change without prior notice for product improvement. Images are for illustrative purposes only.