KIRITO



PT12 EverClear

Tool-free LED Post Top Light

A self-clean design to shed debris and minimize maintenance needs.

- Up to 160lm/W
- Power Selectable
- CCT Selectable
- IP66
- IK08
- C4 anti-corrosion
- Dark-Sky compliant
- DALI 2.0

Dome Design, Self-cleaning

The distinctive dome design not only draws attention but also sheds snow and debris with ease, ensuring lasting performance and a clean appearance.

Dark Sky Compliant

With warm 3000K CCT or below, EverClear is Dark-sky compliant, featuring 0 up-light to protect the nocturnal ecosystem.




Dual Adjustable Option


3 power and 3 color temperature adjustable options for ultimate flexibility and simplified inventory management.

CCT selectable



CCT & Power selectable



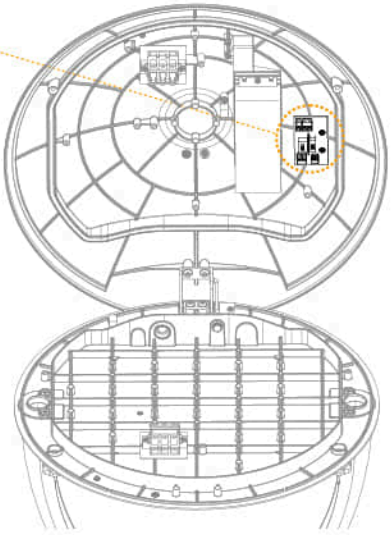

Power selectable



Power(W) / Power percent	40	60
H	40	60
M	30	45
L	20	30

* The tolerance for power is ±10%

Easy & Limited Maintenance



Tool-free open, easy maintenance.




The fixture auto-locks at opening > 90°, providing hands-free access for maintenance.





Low-Copper aluminum construction delivers superior corrosion resistance for lower maintenance.

Versatile Application

Adapted to various urban landscapes like historical urban centres, residential areas, squares, bike paths, parks, etc.









ADDITIONAL PRODUCT SPECIFICATIONS

Series Code	PT12
Power	40W, 60W
Efficacy	160lm/W
Input Voltage	220-240VAC, 50 / 60 Hz
Power Factor	>0.90
CCT	2700K, 3000K, 4000K
CRI(Ra)	70, 80
Corrosion Class	C4
IP Rating	IP66
IK Rating	IK08
Mounting Option	Post Top
Warranty	5 Years
Surge Protection	10kV line-line, 10kV line-earth
Operating Temperature	-30°C to + 50°C

EverClear's dome-shaped design helps shed snow and debris, ensuring long-lasting performance and a clean look. When CCT is 3000K or below, EverClear can meet dark-sky standards. 3 power and 3 CCT adjustable options, providing maximum flexibility and simplifying inventory management. Due to its tool-free open and automatic locking system, as well as high anti-corrosion materials, maintenance becomes very easy and limited.

PRODUCT VIEWS



VIEW 1



VIEW 2



VIEW 3



VIEW 4